

H7 | LED Wall Packs

LP741 SERIES

PRODUCT FEATURES

- ▶ UL Listed for Wet Location
- ▶ Die Cast Aluminum Housing
- ▶ UV Resistant Bronze Powder Coat Finish
- ▶ Polycarbonate Lens with Weatherproof Gasket
- ▶ TYPE III Distribution
- ▶ Ambient Operating Temp: -40°C / -40°F to 40°C / 104°F
- ▶ 50,000 Life Hours
- ▶ Built-In Photocell
- ▶ 0-10V Dimmable
- ▶ 5 Year Limited Warranty



Catalog No.	Voltage	System Wattage	Color Temp.	Lumens	Wattage Equiv.
LP741-30W-P-CW	120~277V	30W	5000K	3,537 lm	100W MH

NEW AC-LWP28 SERIES

PRODUCT FEATURES

- ▶ UL Listed for Wet Location
- ▶ Die Cast Aluminum Housing
- ▶ UV Resistant Bronze Powder Coat Finish
- ▶ Frosted Cover
- ▶ TYPE IV Distribution
- ▶ Ambient Operating Temp: -40°C / -40°F to 45°C / 113°F
- ▶ 50,000 Life Hours
- ▶ Adjustable CCT
- ▶ Built-In Photocell
- ▶ 0-10V Dimmable
- ▶ 5 Year Limited Warranty





CCT Adjustment Switch Inside

Catalog No.	Voltage	System Wattage	Color Temp.	Lumens	Wattage Equiv.
AC-LWP28-20W-P	120~277V	20W	3000K/ 4000K/ 5000K	2,600 lm	70W MH

LWP25 SERIES

PRODUCT FEATURES

- ▶ UL Listed for Wet Location
- ▶ Die Cast Aluminum Housing
- ▶ UV Resistant Bronze Powder Coat Finish
- ▶ Polycarbonate Lens with Weatherproof Gasket
- ▶ TYPE I Distribution
- ▶ Ambient Operating Temp: -40°C / -40°F to 40°C / 104°F
- ▶ 50,000 Life Hours
- ▶ 0-10V/PWM/VR Dimmable
- ▶ 5 Year Limited Warranty

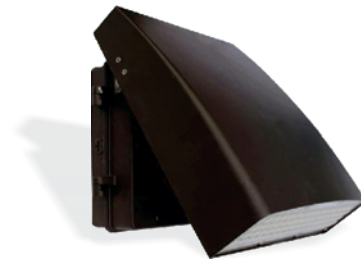

Pivoting Head adjusts from 0° to 90°

Catalog No.	Voltage	System Wattage	Color Temp.	Lumens	Wattage Equiv.
LWP25-12W-WW	120~277V	12W	3000K	1,428 lm	50W MH
LWP25-12W-CW		12W	5000K	1,512 lm	50W MH
LWP25-30W-CW		30W	5000K	3,600 lm	100W MH

CERTIFICATES FOR THE PAGE



ACCESSORIES Sold Separately



PC-1F
PC-1F-277



PC-1S



PC-1SH

Photocells

SCAN FOR MORE INFO

