

INSTALLATION INSTRUCTIONS



FOR USE ONLY WITH LOW VOLTAGE LANDSCAPE POWER UNITS THAT DO NOT EXCEED 25 AMPS, 15 VOLT MAXIMUM.

WARNING: All work must be performed by qualified electrician. Luminaire must be installed in accordance with the National Electrical Code (NEC) and local codes. For portable stake or surface mount using a cord and plug, the luminaire must be plugged into a receptacle protected by a ground fault circuit interrupter (GFCI). Failure to do so may result in serious injury and/or damage to the luminaire.

WARNING: Debris must be kept clear from top and interior of in-grade fixtures. Excessive heat could occur that may create a fire hazard and/or harm the fixtures components. Specific attention must be made to never install in-grade fixture in mulch, wood chips or other potentially ignitable materials. For installation in potentially ignitable materials, such as mulch and wood chips, installer must use an above-grade mounted fixtures. Failure to do so will void the warranty and may result in serious injury and/or damage the fixture and/or property.

SAFETY WARNING: Luminaire can become very hot depending on the lamp wattage used. Lens and housing around the lamp can become hot enough to blister hands. Particular care should be taken not to locate luminaires where small children can reach them if high wattage lamps are used.

NOTE: Luminaires are not to be installed within 10 ft. (3.05m) of pool or spa. Secondary cable is not to be buried more than 6". When using multiple Luminaires, load should not exceed the total watts of transformer rating. Do not use extension cords on power units.

NOTE: Save these instructions for future reference.


LUMINAIRE IS LISTED FOR ABOVE GROUND INSTALLATION ONLY.

BEFORE INSTALLATION:

This is a low voltage fixture for use with maximum of 25A, 15V power units. A remote transformer is required. The main cable from the power units should be buried for less than 6 inches under the ground level.

LUMINAIRE MOUNTING:

1. To prevent electrical shock, disconnect transformer from electrical supply before installation or service.
2. Loosen the screws, then remove the coverplate and reflector assembly from luminaire.
3. Using luminaire housing as a template, mark location of housing on the wall.
4. Cut the hole in wall according to the mark.
5. Punch out the K.O.'s in the housing (side or bottom) and pass the wire leads through the opened K.O.'s.
6. Insert housing into cut hole. Use frame mounting brackets, bracket screws and mounting wood screws (not provided), secure housing tightly against the wall.
7. Complete the wiring from power supply (using silicone filled safety connectors) and ground properly.

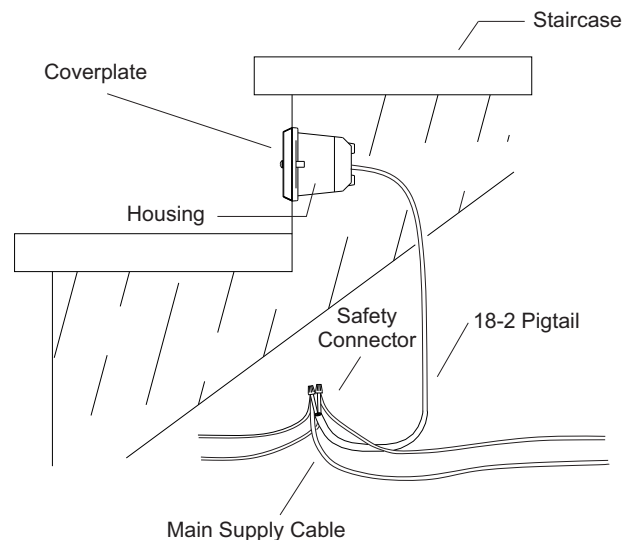

NOTE: Illustration is used for reference purpose only, actual fixture may differ on each luminaire.

8. Install the reflector and lamp(s) with correct wattage and type marked on fixture label.
9. Replace the cover plate, then tighten the screws evenly.
10. Turn ON power and check for proper operation.



INSTALLATION INSTRUCTIONS

Maintenance:

To assure proper operation and efficiency and to prevent luminaire overheating, lens must be kept clean and free of dirt, dust, leaves, trash and mineral deposits from water. A regular schedule maintenance program is recommended.

IMPORTANT SAFETY INSTRUCTIONS
THE LIGHTED LAMP IS HOT!!!

WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamps get hot quickly! Contact only switch/plug when turning on.
3. Do not touch hot lens, guard or enclosure.
4. Keep lamp away from material that may burn.
5. Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
6. Do not operate luminaire fitting with a missing or damaged cover.

SAVE THESE INSTRUCTIONS

Lamp Installation/Replacement:

CAUTION: Do not exceed maximum wattage marked on luminaire label.

1. To prevent electrical shock, disconnect from electrical supply before service.
2. Loosen the screws, then remove cover plate to expose lamp.
3. Replace lamp with correct wattage and type marked on fixture label.

NOTE: DO NOT touch lamp with bare hands. Always use soft cloth or the plastic wrapping (if available) from the lamp to handle the lamp.

4. Clean the gasket and gasket channel.
5. Re-install gasket and cover plate, then tighten the screws evenly.

