

INSTALLATION INSTRUCTIONS



WARNING: All work must be performed by qualified electrician. Luminaire must be installed and grounded in accordance with the National Electrical Code (NEC) and local codes. Failure to do so may result in serious injury and/or damage to the luminaire.

WARNING: To avoid risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only and in accordance with all applicable codes.

WARNING: To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

Luminaire must be connected to a wiring system with an equipment grounding conductor.

WARNING:

Make sure the supply voltage is the same as the rated luminaire voltage.

Do not install where marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.

Do not operate in ambient temperatures above those indicated on the luminaire nameplate.

Keep lens tightly closed when in operation.

All unused holes must be sealed with waterproof silicone.

NOTE: Protect all wiring connections with approved insulators rated at least 90°C/194°F.

Save these instructions for future reference.


PRECAUTION: Wall pack is designed to allow for a variety of mounting configurations. It can be mounted directly to a recessed junction box or mounted directly to the wall. **NOT INTENDED FOR MOUNTING INVERTED OR ON CEILING**

Ambient Operating Temperatures: -40°C / -40°F to 45°C / 113°F
UL LISTED FOR WET LOCATION



JUNCTION BOX MOUNTING:

1. To prevent electrical shock, disconnect power from electrical supply before installation or service


2. Remove the four screws on both sides of the fixture.




3. Remove the 1/2" plug from the bottom plate. Peel off the yellow sticker and paste it on the back of bottom plate.




4. Install the round plate and bottom plate to the junction box by screws.



5. Make wire connections with safety connectors. Black to black, white to white and green to ground.



6. Reinstall the cover with the four screws



7. Turn ON power and check for proper operation.



NOTE: Illustrations are used for reference purposes only; actual fixture may differ on each luminaire.

INSTALLATION INSTRUCTIONS


SURFACE MOUNTING:

1. To prevent electrical shock, disconnect power from electrical supply before installation or service
5. Remove one 1/2" plug on side, get wire through it and make connections with safety connectors. Black to black, white to white and green to ground.


2. Remove the four screws on both sides of the fixture.

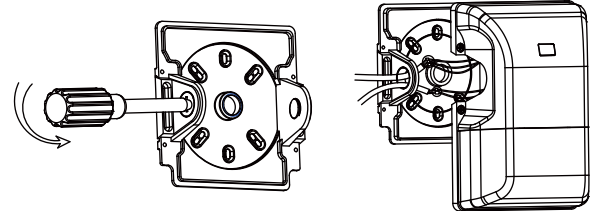


3. Peel off the yellow sticker and paste the black sponge pad on the back of bottom plate.



6. Reinstall the cover with the four screws





4. Install the bottom plate on the wall by screws through the slot on both sides



7. Turn ON power and check for proper operation.

CCT Adjustment Function:

This Fixture comes with CCT adjustment switch inside the fixture. DO NOT SWITCH UNDER LOAD.



CCT Adjustment Switch

MODEL NO.	DLC Product ID	INPUT VOLTAGE	WATTAGE	CCT RANGE	MAX. INPUT AMP.	DIMMING
AC-LWP28-20W-P	S-PXQVZA	120~277V	20W	3000K/4000K/5000K	0.16A	0-10V

After installation, please

- Check whether the lighting fixture is firmly fixed.
- Check whether wires are connected correctly.
- At last, turn on the power, and check if the lighting fixture works well. If not, please turn off the power and contact with your sales representative.

NOTE: Illustrations are used for reference purposes only; actual fixture may differ on each luminaire.