

BOXES WITH PIGTAILS WELDED 2-1/8" DEEP WITH RAISED GROUND EMBOSS

BOXES WITH PIGTAIL

Pre-Assembled with 10-32 Ground Screw and Solid Cu #12AWG Pigtail

BSA

- ▶ Pre-installed Back Support Arm provides support for studs up to 6" deep
- ▶ Great for prefab applications

NOTE

- ▶ For Fixture/Luminaire Support of 50 lbs or less (except 4-11/16" boxes)
- ▶ See A Section for complete offering of Electrical Junction, Covers, Rings and more

Cat. No.	Dimension Square	Pigtail Length	Cu. Inch	Knockouts		Std. Pkg.
				Sides	Bottom	
5SDB-MKO-PT	4-11/16"	7"	42.0	2 - 1/2", 10 - MKO	2 - 1/2", 2 - MKO	24
5SDB-MKO-PT-10	4-11/16"	10"	42.0	2 - 1/2", 10 - MKO	2 - 1/2", 2 - MKO	24
4SDB-MKO-PT	4"	7"	30.3	8 - 1/2", 4 - MKO	2 - 1/2", 2 - MKO	24
4SDB-MKO-PT-10	4"	10"	30.3	8 - 1/2", 4 - MKO	2 - 1/2", 2 - MKO	24
4SDB-MKO-PT-BSA	4"	10"	30.3	8 - 1/2", 4 - MKO	1 - 1/2", 2 - MKO	24



5SDB-MKO-PT 5SDB-MKO-PT-10 4SDB-MKO-PT 4SDB-MKO-PT-10 4SDB-MKO-PT-BSA

6" Adjustable Back Support Arm

LOW-VOLTAGE PARTITIONS

PRODUCT FEATURES

- ▶ Steel Partitions allow for multi-system installations inside junction box
- ▶ Not compatible with Adj. Rings

Cat. No.	Description	Dimension Square	For Use with 2-Gang Rings	Std. Pkg.
5SDP-100	For use with 2-1/8" Deep Boxes	4-11/16"	Flat, 1/4", 1/2", 3/4", 1"	25
5SDP-200	For use with 2-1/8" Deep Boxes	4-11/16"	5/8", 1-1/4", 1-1/2", 1-3/4", 2"	25
4SDP-100	For use with 2-1/8" Deep Boxes	4"	Flat, 1/4", 1/2", 3/4", 1"	25
4SDP-200	For use with 2-1/8" Deep Boxes	4"	5/8", 1-1/4", 1-1/2", 1-3/4", 2"	25



5SDP-100

5SDP-200

4SDP-100

4SDP-200

NEMA TYPE 1 12" X 12" ENCLOSURE WITH SPECIALTY K.O.'S

PRODUCT FEATURES


- ▶ ANSI 61 Gray Polyester Powder Paint Finish inside and out
- ▶ 16 Gauge Steel or Plated Steel
- ▶ Mounting holes on back of box
- ▶ 12124-50: 1" distance from back of box to bottom of K.O.
- ▶ 12124-850: 3/8" distance from back of box to bottom of K.O.

Cat. No.	Enclosure Size (Inches)			Knockouts		Std. Pkg.
	Width	Height	Depth	Sides	Bottom	
12124-50 NEW	12"	12"	4"	20 - 1/2"	1 - 1" & 1-1/4" CKO	2
12124-850 NEW	12"	12"	4"	32 - 1/2"	1 - 1" & 1-1/4" CKO	2



12124-50

12124-850

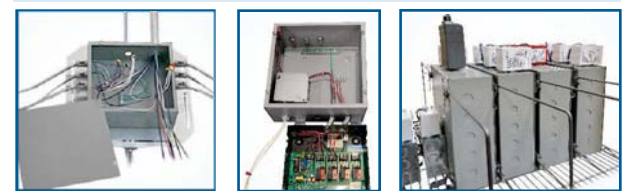

Shown installed to BCHS-12, MC cables connected to 1/2" K.O.'s

Shown fabricated to lighting panel, used as pull box

Shown fabricated with pre-wired lighting relay devices, ready-to-install

- **600V** MKO's and CKO's suitable for bonding without any additional bonding means up to 600V
- Acceptable for use in 2-hour fire rated walls

