

UNIVERSAL MOUNTING INTERNAL ADJUSTMENT BOXES

orbit
Orbit Industries, Inc.


NEW



(2) UNIQUE TRI-COMBO
HEX ADJ. SCREWS

Adjustable
1/2" to 1 - 1/2"

FA-UMIAB-35

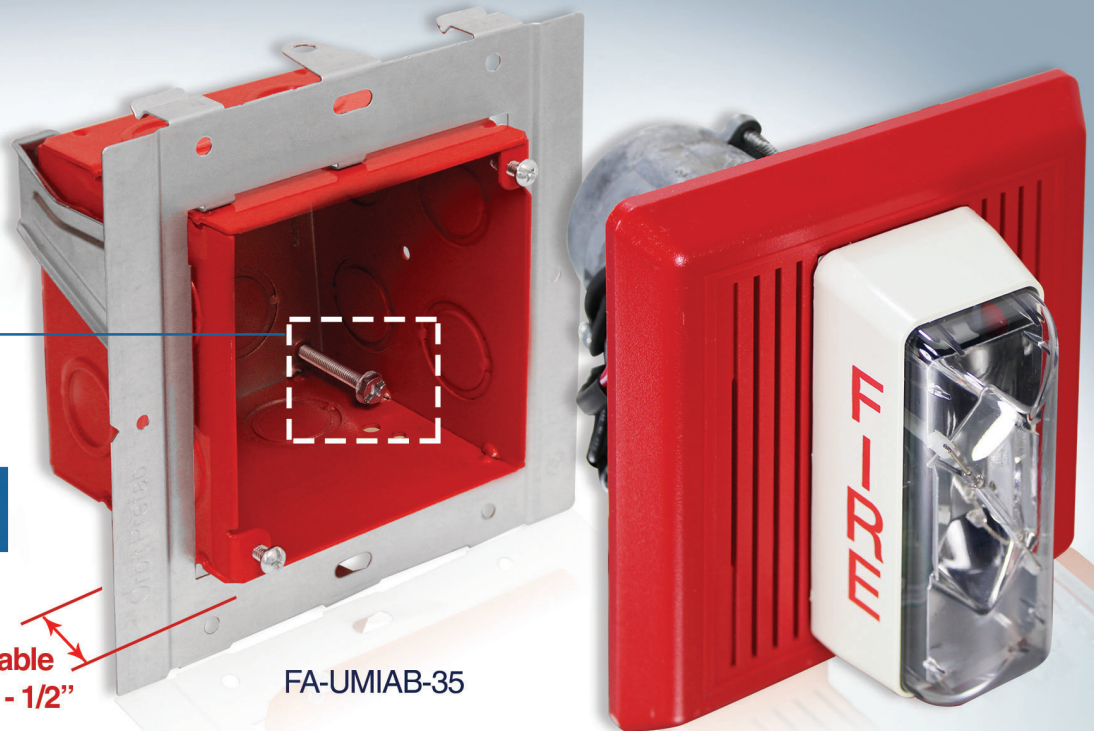

BEST WAY TO MOUNT FIRE ALARM DEVICES!



6-WAY ADJUSTABILITY


FA-UMIAB-35 SHOWN INSTALLED ON SSB-T5

FA-UMIAB-35 mounts Direct-to-Stud or snaps onto SSB-T5 for Between Stud applications.

Simplify rough-in for oversized Fire Life Safety devices with Orbit's **NEW Internal Adjustment 4" Square Boxes!**

- Internal adjustment screws allow the box to be adjusted before and after installation
- Built-In Internal Adjustment from 1/2" to 1-1/2" for the UMIAB-35's and 1/2" to 1-1/4" for UMIAB-25's
- Tri-Combo Hex Adj. Screws make box depth adjustment seamless
- UMIAB-25's ideal for use with 2-1/2" Deep Wall Studs

UNIVERSAL MOUNTING INTERNAL ADJUSTMENT BOXES

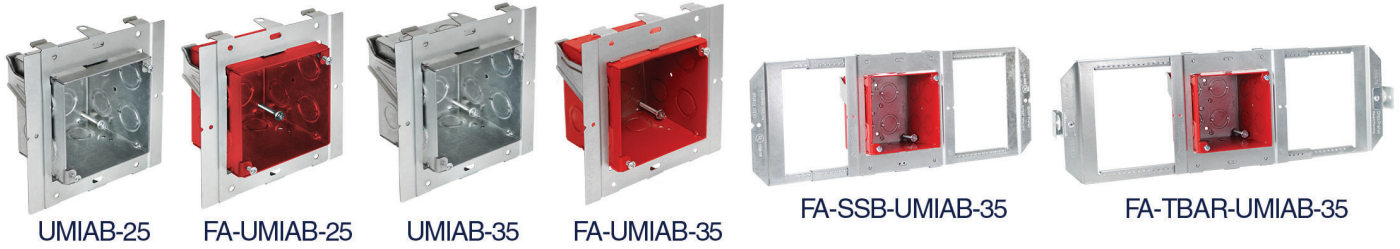


DIRECT TO STUD



BETWEEN STUDS
FA-UMIAB-35 Installed on SSB-T5




DROP CEILING APPLICATION
FA-UMIAB-35 Installed on SSB-TBAR

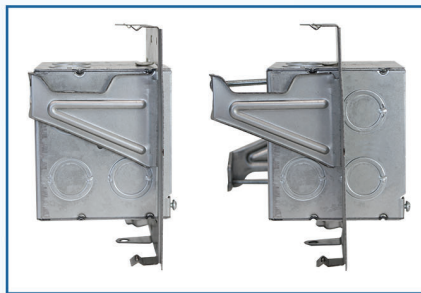


ADJUSTABILITY RANGE

UMIAB-25's: 1/2" to 1-1/4"
UMIAB-35's: 1/2" to 1-1/2"

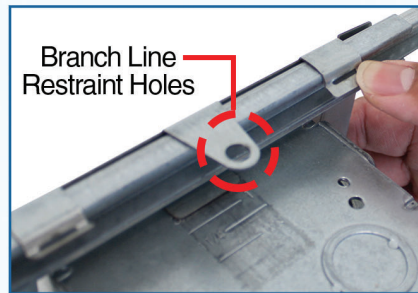


ADAPTER TO BRACKET LATCH

Fold tabs to secure adapter on SSB Brackets

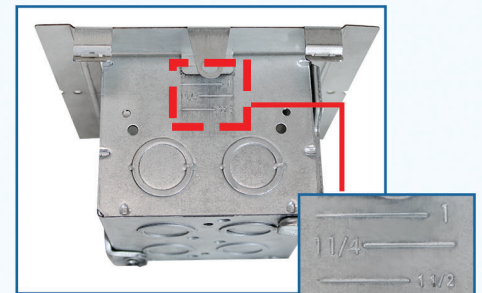


DEPTH MARKING

Engraved depth stamp on box allows for depth measurement without requiring additional measuring tools

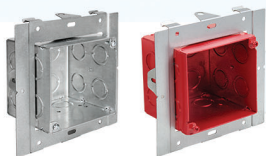

For original External Adj. Boxes, see UMAB Series



For a 4" octagon (40) box version, see UMAB-4R Series

Cat. No.	Description	Box Depth	Cu. In.	Adj. Range	KO Sides	KO Bottom	Std. Pkg.
UMIAB-25	Internal Adj. 4" Sq. Box	2-1/2"	36.0	1/2" - 1-1/4"	(4) - 1/2", (4) - MKO	(4) CKO	10
FA-UMIAB-25	Internal Adj. 4" Sq. Box, Red Powder Coat Finish	2-1/2"	36.0	1/2" - 1-1/4"	(4) - 1/2", (4) - MKO	(4) CKO	10
UMIAB-35	Internal Adj. 4" Sq. Box	3-1/2"	46.0	1/2" - 1-1/2"	(12) CKO	(4) CKO	10
FA-UMIAB-35	Internal Adj. 4" Sq. Box, Red Powder Coat Finish	3-1/2"	46.0	1/2" - 1-1/2"	(12) CKO	(4) CKO	10
FA-SSB-UMIAB-35	Preassembled SSB-T5 with FA-UMIAB-35	3-1/2"	46.0	1/2" - 1-1/2"	(12) CKO	(4) CKO	10
FA-TBAR-UMIAB-35	Preassembled SSB-TBAR with FA-UMIAB-35	3-1/2"	46.0	1/2" - 1-1/2"	(12) CKO	(4) CKO	10