

PHOTOELECTRIC CONTROLS

PRODUCT FEATURES

- ▶ 1.5VA Power Consumption
- ▶ 6-20 Lx On Level
- ▶ 30-60 Lx Off Level
- ▶ 2-Year Warranty

Cat. No.	Description	Rating		Std. Pkg.
		Tungsten	Ballast	
PC-1	120V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1-277	208/277V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1S	120V 50/60Hz, Swivel-Type	1200 W	1000VA	12
PC-1SH	120V 50/60Hz, High-Wattage Swivel-Type	2000 W	1900VA	12
PC-1F	120V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1F-277	208/277V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1P	120V 50/60Hz, with Weatherproof Plate & Gasket	500 W	850VA	12
PC-1T	120-277V 50/60Hz, Twist Lock E-Ballast: 8A@120VAC, 5A@208-277VAC	1000 W	1800VA	12




PC-1
PC-1-277



PC-1S



PC-1SH

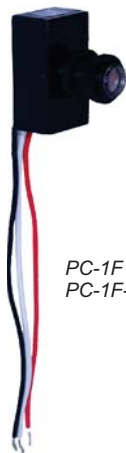

PC-1F
PC-1F-277



PC-1P



PC-1T