




UMA-LVBS FEATURES

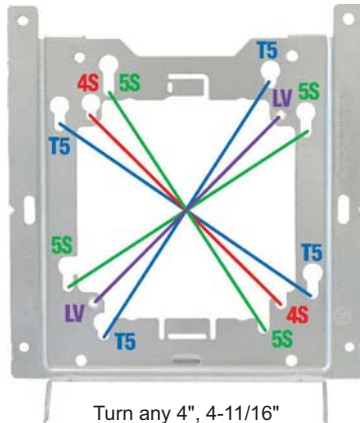

Turn any 4", 4-11/16" and 5" Sq. Box 90°

- ▶ LV= 4" ring
- ▶ 4S= 4" sq.
- ▶ 5S= 4-11/16" sq.
- ▶ T5= 5" sq.



BUILT-IN BACK SUPPORT & EXTENSION

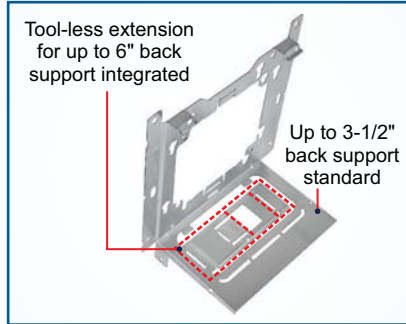

SNAP-OFF

TOOL-LESS INSTALLATION

BOX & ADAPTER LATCHES

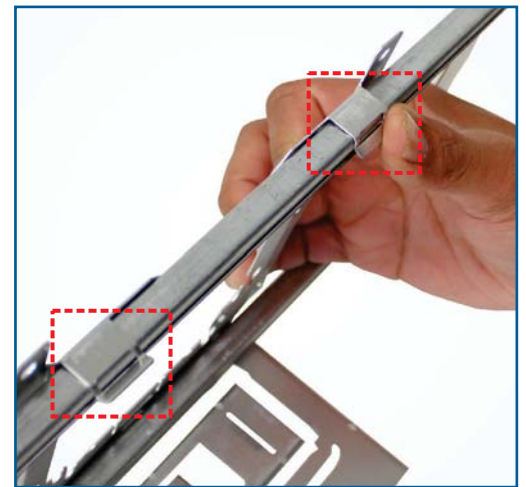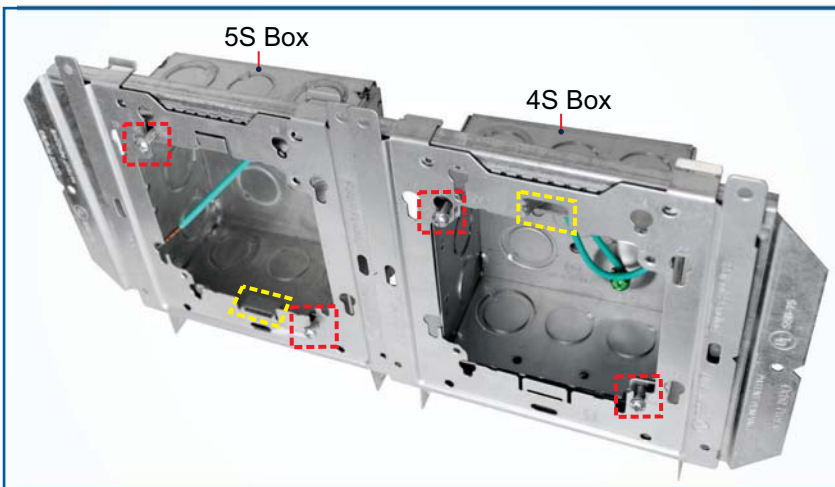

BOX TO ADAPTER LATCH

Bendable latch tabs securely hold 4" or 4-11/16" sq. box in place without need to tighten box screws. Skip hassle of tightening box screws until the final ring installation, making installation process more efficient and convenient.

ADAPTER TO BRACKET LATCH

Fold tab to secure adapter on SSB Brackets

90° ROTATION



Extended Mounting Tab enables secure mounting with 90° rotation. Box will be able to receive large conduit without removal of back support.



All *AR1G- & *AR2G- rings install vertical or horizontal

STUD MOUNT

VERTICAL & HORIZONTAL RING INSTALLATION