

LED TEMPORARY JOBSITE WORK LIGHT

LTL SERIES



- UL Listed for Damp Locations (IP63)
- Includes 3-Prong male plug with 10-ft 18AWG cord.
- Hidden 3-prong female socket
- Linkable for string lighting:
 - Up to fourteen 60W units
 - Up to eight 100W units
 - Up to five 150W units
 - Combination of three, not exceeding 900W
- Portable Hook with flexible spring
- 50,000 Life Hours
- Heavy duty and durable construction, stainless steel lamp cage
- -40°F to 140°F ambient temperature
- 5 Year Limited Warranty



Tripod Mount Option

LTL-TS




Floor Stand Option

LTL-FS




Linkable for String Lighting!


Catalog Number	UPC	Voltage	System Wattage	Surge Voltage	Color Temp	Lumens	CRI	Watt. Equiv.	Dimensions
LTL-60W-CW	615624013116	120~277V	60W	6KV	5000K	7200	80+	250W MH	(A) 6-1/2" x (B) 10-3/4" x (C) 5-1/8"
LTL-100W-CW	615624013123	120~277V	100W	6KV	5000K	12000	80+	400W MH	(A) 6-1/2" x (B) 11-5/16" x (C) 5-11/16"
LTL-150W-CW	615624013130	120~277V	150W	10KV	5000K	18000	80+	600W MH	(A) 6-1/2" x (B) 12-11/16" x (C) 7-1/16"

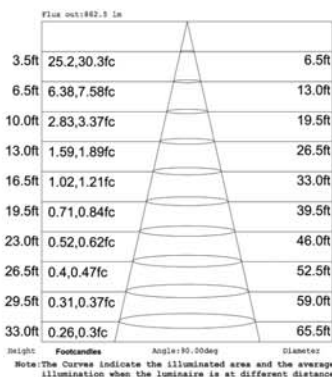


LTL-60W-CW

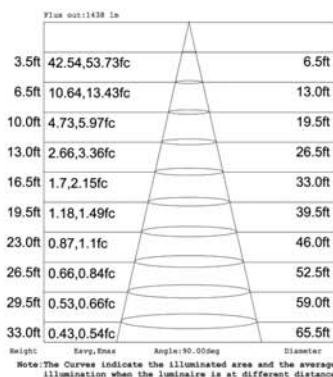

LTL-100W-CW

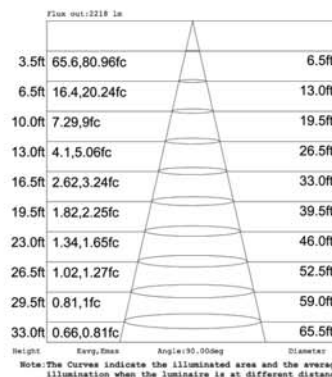

LTL-150W-CW

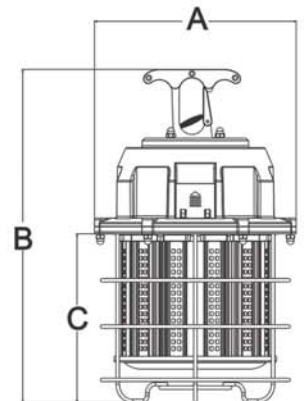



CTL-F

CTL-105

CTL-200



CFL-105W



CFL-200W



Stainless Steel Snap Hook

FLUORESCENT JOB SITE LIGHTS

Still a great value for years of hard work!

- ETL Listed for Damp Locations
- 120 vAC
- Includes 3-prong male plug with 6-ft cord
- Also includes 3-prong female plug with 6-in cord
- 10,000 Life Hours
- Stainless Steel Snap Hook attaches luminaire to any structural member
- Rugged steel housing with high-visibility orange powder coat finish
- Welded Steel Cage and snap-on Shatter Guard
- -4° F / 104° F ambient temperature



Fixture Only	Part No.	Description					Lamp Base	Unit Pkg.	Std.Pkg.
	CTL-F	Cage with Stainless Steel Hook & Cords. Bulb not included.					E39 Mogul Base	1	4

Assembly Lights	Part No.	Watt	Voltage	Color Temp.	Lumens	Life	Lamp Base	Unit Pkg.	Std.Pkg.
	CTL-105	105W	120V	6400K	5250lm	10000h	E39 Mogul Base	1	4
	CTL-200	200W	120V	6400K	10000lm	10000h	E39 Mogul Base	-	1

Lamp Only	Part No.	Watt	Voltage	Color Temp.	Lumens	Life	Lamp Base	Unit Pkg.	Std.Pkg.
	CFL-105W	105W	120V	6400K	5250lm	10000h	E39 Mogul Base	1	10
	CFL-200W	200W	120V	6400K	10000lm	10000h	E39 Mogul Base	1	10



LFL7-30W-T



LFL7-50W-KN



LFL6-80W-T



See orbitelectric.com for complete LFL7 Flood Light Series

TEMPORARY LED FLOODLIGHTS

- UL Listed for Wet Locations (IP65)
- 120~277 vAC
- 50,000 Life Hours
- Die Cast Aluminum housing with Bronze Powder Coat finish
- Polycarbonate Lens with Weatherproof Gasket
- NEMA Type: **30W/50W: 7H x 6V Beam Spread**
- 90° x 120° Distribution (80W)
- 5 Year Limited Warranty
- **30W/50W:** -40°F to 104°F Ambient Temperature
- **80W:** -4°F to 104°F Ambient Temperature
- 80W Dimmable to 10%



Catalog No.	UPC	System Wattage	Efficacy	Color Temp.	Bug Rating	Lumens	CRI	Wattage Equivalent
LFL7-30W-WW-T	615624012867	30W	126 lm/W	3000K	B2-U2-G1	3837	70+	100W MH
LFL7-30W-WW-KN	615624012881	30W	126 lm/W	3000K	B2-U2-G1	3837	70+	100W MH
LFL7-30W-CW-T	615624012850	30W	130 lm/W	5000K	B2-U2-G1	3976	70+	100W MH
LFL7-30W-CW-KN	615624012874	30W	130 lm/W	5000K	B2-U2-G1	3976	70+	100W MH
LFL7-50W-CW-T	615624012898	50W	133 lm/W	5000K	B3-U2-G2	6652	70+	175W MH
LFL7-50W-CW-KN	615624012904	50W	133 lm/W	5000K	B3-U2-G2	6652	70+	175W MH
LFL6-80W-T	615624011242	80W	130 lm/W	5000K	B3-U2-G2	10342	80+	250W MH