


LAMP HOLDERS

PRODUCT FEATURES


- ▶ Die Cast Aluminum & Zinc
- ▶ 120V
- ▶ PAR38 Lamp Not Included, 90W Max. for LH150-SG, 150W Max. for LH300

Cat. No.	Description	Color (Cat. No. - Color Code)				Std. Pkg.
		Gray	Bronze	Black	White	
LH150-SG	Lampholder with Premium Silicon Outer Gasket	LH150-SG-GY	LH150-SG-BR	LH150-SG-BK	LH150-SG-W	25
*LH300	Premium Grade Porcelain socket with Nickel contacts and Teflon-jacketed wire leads					24



LH150-SG

Includes Premium Silicon Gasket

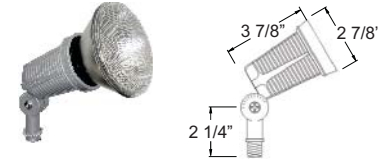

*LH300

Shown Installed

LAMP HOLDER ACCESSORIES

Cat. No.	Description	Colors Available	Std. Pkg.
BASE-R	Round Surface-Mount Bracket 1/2" Female, Cast Aluminum	BK, BR, GN, VG, WH	10
BASE-SB	Round Surface-Mount Bracket 1/2" Female, Solid Brass	Antique Brass, *Nat. Brass, Acid Grn	10
TB-LV	Tree-Hugger Canopy, Low-Voltage	BR, GN, VG, WH	1



BASE-R



BASE-SB



TB-LV

PHOTOELECTRIC CONTROLS

PRODUCT FEATURES

- ▶ 1.5VA Power Consumption
- ▶ 6-20 Lx On Level
- ▶ 30-60 Lx Off Level
- ▶ 2-Year Warranty

Cat. No.	Description	Rating		Std. Pkg.
		Tungsten	Ballast	
PC-1	120V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1-277	208/277V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1S	120V 50/60Hz, Swivel-Type	1200 W	1000VA	12
PC-1SH	120V 50/60Hz, High-Wattage Swivel-Type	2000 W	1900VA	12
PC-1F	120V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1F-277	208/277V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1P	120V 50/60Hz, with Weatherproof Plate & Gasket	500 W	850VA	12
PC-1T	120~277V 50/60Hz, Twist Lock E-Ballast: 8A@120VAC, 5A@208-277VAC	1000 W	1800VA	12



PC-1
PC-1-277



PC-1S



PC-1SH



PC-1F
PC-1F-277



PC-1P



PC-1T



File E303572
File E224007
File E348511