
P15 Fixed Mounting Bracket & Fixed "O Bracket"



FIXED MOUNTING BRACKET PRODUCT FEATURES

- Compatible with 4", 4-11/16" and 5" sq. boxes
- Unique key-hole patterns allow boxes to be turned 90°
- Compatible w/ Standard & Adj. Rings mounted vertically or horizontally
- ▶ Use 4" rings on any size box. Can be mounted on their own for low voltage applications using 8/32 screws
- ▶ Bendable box latch tabs temporarily hold 4" or 4-11/16" sq. boxes in place without needing to tighten box screws until final ring or cover installation
- Low profile design limits drywall bulging


Compatible with 5" Sq. Boxes!




FMB-16



FMB-24

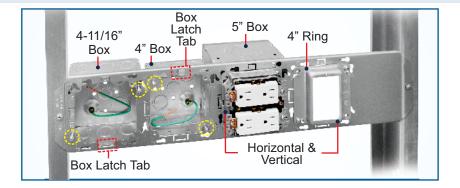



FMB INSTALLED ON STUDS

Mount up to 3 boxes between 16" studs with FMB-16 and 4 boxes between 24" with FMB-24

MOUNTING HOLES

Compatible with 4", 4-11/16" and 5" square boxes (Box can be turned 90°)

FIXED "O" BRACKET FLAT

PRODUCT FEATURES

- ▶ Pre-Galvanized 18 Gauge sheet
- ▶ Accommodates 4", 4-11/16" square, and multi-gang boxes
- Allows steel boxes to adjust horizontally along the bracket with ease
- ▶ Reduces assembly time on job site

| Cat. No. | Application | (W x L) | Std.Pkg. |
|----------|----------------------|----------|----------|
| MBBH-16 | For 16" stud spacing | 6" x 16" | 50 |
| MBBH-24 | For 24" stud spacing | 6" x 24" | 50 |





Shown installed with both 4" and 4-11/16" square boxes



