

Orbit's wide selection of weatherproof products meet the latest standards, offering the most protection for outdoor corrosive locations. Featuring products with a die cast metal construction and premium powder coat finish, our weatherproof products ensure devices are protected from the elements.

Extra Duty In-Use Weatherproof Covers | Pg. C1



EXCEEDS EXTRA DUTY REQUIREMENTS

Metallic and Non-Metallic Extra Duty In-Use Weatherproof Covers provide devices with protection against outdoor elements while still maintaining ease of access. Each cover features multiple device configurations to suit any application and are constructed to meet the NEC Code for "Extra Duty".

Field Modifiable Weatherproof Boxes | Pg. C8



PUT KNOCKOUTS WHERE YOU NEED THEM

Field Modifiable Weatherproof Boxes allow installers to drill a KO along the edge of the box by simply using a circle drill. Embossed guidelines assist with positioning. Boxes can be used with existing device covers making them a must-have on every Service Truck!

EXTRA DUTY IN-USE COVERS WITH INTERCHANGEABLE INSERTS

PRODUCT FEATURES

- ▶ Gray finish
- ▶ Clean installation with no break-off parts
- ▶ **Non-Metallic:**
Impact-Resistant Thermoplastic
- ▶ **Metallic:**
Heavy-Duty Die Cast Metal
- ▶ Pad lockable design
- ▶ Pre-installed Adhesive Gasket
- ▶ Extra large cord opening with rubber flaps that minimize debris
- ▶ Complies with NEC Article 406.9 (A)(B)(1)(2) for "EXTRA DUTY" & damp and wet locations (for more information see Section W)

Easy-to-Assemble Building-Block Style Adapters Accommodate a Wide Range of Wiring Devices



1-Gang Models Include:

- 1 x Toggle Switch
- 1 x Duplex Receptacle
- 1 x GFCI/Decorative
- 1 x 1-3/8"
- 1 x 1-9/16"~1-5/8"
- 1 x 1-11/16"
- 1 x 2-1/8"

2-Gang Models Include:

- 2 x Toggle Switch
- 2 x Duplex Receptacle
- 2 x GFCI/Decorative
- 2 x 1-3/8"
- 3 x 1-9/16"~1-5/8"
- 1 x 1-11/16"
- 1 x 2-1/8"
- 1 x 2-5/8"

Cat. No.	Description	Std. Pkg.
WIU-1U-ED	1-Gang Universal, Non-Metallic, 2-3/4" Deep	8
WIU-1UD-ED	1-Gang Universal, Non-Metallic, 3-1/2" Deep	8
WIUM-1DV	1-Gang Vertical, Metallic, 2-3/4" & 4", Multi Depth	10
WIUM-1DH	1-Gang Horizontal, Metallic, 2-3/4" & 3-1/2", Multi Depth	10
WIU-2UD-ED	2-Gang, Non-Metallic, 3-1/2" Deep	6
WIUM-2U	2-Gang, Metallic, 3-1/4" & 4-1/2", Multi Depth	10

14 IN 1




WIU-1U-ED

2-3/4" Deep

WIU-1UD-ED

3-1/2" Deep

7 IN 1

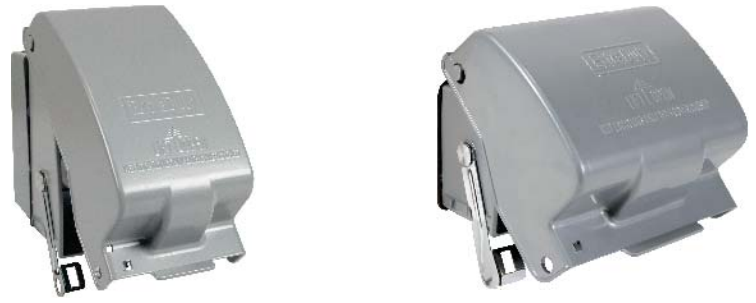

WIUM-1DV (Metal)

Expands 2-3/4" & 4"

WIUM-1DH (Metal)

Expands 2-3/4" & 3-1/2"

31 IN 1



WIU-2UD-ED

3-1/2" Deep

WIUM-2U (Metal)

Expands 3-1/4" & 4-1/2"

Weatherproof




UNIVERSAL DEVICE COVERS

PRODUCT FEATURES

- ▶ Clean installation with no break-off parts
- ▶ Heavy-Duty Die-Cast Metal with Polycarbonate Inserts
- ▶ Pad lockable design
- ▶ Pre-installed Adhesive Gasket
- ▶ Meets NEC Article 406.9 (A) for damp and wet locations (for more information see Section W)

Weatherproof

Easy-to-Assemble Building-Block Style Adapters Accommodate a Wide Range of Wiring Devices



1C-U Includes:

- 1 x Toggle Switch
- 1 x Duplex Receptacle
- 1 x GFCI/Decorative
- 1 x 1-3/8"
- 1 x 1-9/16"-1-5/8"

2C-U Includes:

- 2 x Toggle Switch
- 2 x Duplex Receptacle
- 2 x GFCI/Decorative
- 2 x 1-3/8"

3C-U Includes:

- 3 x Toggle Switch
- 3 x Duplex Receptacle
- 3 x GFCI/Decorative
- 3 x 1-3/8"



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		Gray	Bronze	White	
1C-U	1-Gang	1C-U	1C-U-BR	1C-U-W	25
2C-U	2-Gang	2C-U	2C-U-BR	2C-U-W	12
3C-U	3-Gang	3C-U	-	-	10

5 IN 1



1C-U



Install Vertically or Horizontally

16 IN 1



2C-U

64 IN 1



3C-U

1-GANG BLANK AND DEVICE COVERS


2-3/4" W x 4-1/2" H

PRODUCT FEATURES

- ▶ Zinc Die Cast (Except 1-BC, 1-BC-G, & 1CA-SW)
- ▶ Gasket included
- ▶ Device mounted
- ▶ Meets NEC Article 406.9 (A) for damp and wet locations (for more information see Section W)

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		Gray	Bronze	White	
1-BC	Aluminum Blank (Unpainted)	1-BC	-	-	50
1-BC-G	Heavy-Duty Galvanized Steel Blank	1-BC-G	1-BC-BR	1-BC-W	50
1C-TS	Toggle Switch	1C-TS	1C-TS-BR	1C-TS-W	25
1C-DH	Duplex/Combo. Device - Horizontal	1C-DH	1C-DH-BR	1C-DH-W	25
1C-DV	Duplex/Combo. Device - Vertical	1C-DV	1C-DV-BR	1C-DV-W	25
1C-GH	GFCI - Horizontal	1C-GH	1C-GH-BR	1C-GH-W	25
1C-GV	GFCI - Vertical	1C-GV	1C-GV-BR	1C-GV-W	25
1C-SV	Single recept. or Switch Vertical 1.406" Diameter	1C-SV	1C-SV-BR	1C-SV-W	25
1C-PO20	20A Power Outlet - 1.594" Diameter	1C-PO20	-	-	25
1C-PO30	30A Power Outlet - 1.750" Diameter	1C-PO30	-	-	25
1C-PO40	40-50A Power Outlet - 2.281" Diameter	1C-PO40	-	-	25
1CA-SW	Aluminum Lever, compatible with Standard Toggle Switches (not included)	1CA-SW	1CA-SW-BR	1CA-SW-W	25
1CA-SW15	Aluminum Lever & 15A Single-Pole Switch	1CA-SW15	1CA-SW15-BR	1CA-SW15-W	25
1CA-SW20	Aluminum Lever & 20A Single-Pole Switch	1CA-SW20	1CA-SW20-BR	1CA-SW20-W	25
G-1	Universal 1-Gang Foam Gasket	G-1 (Black only)			50

Weatherproof

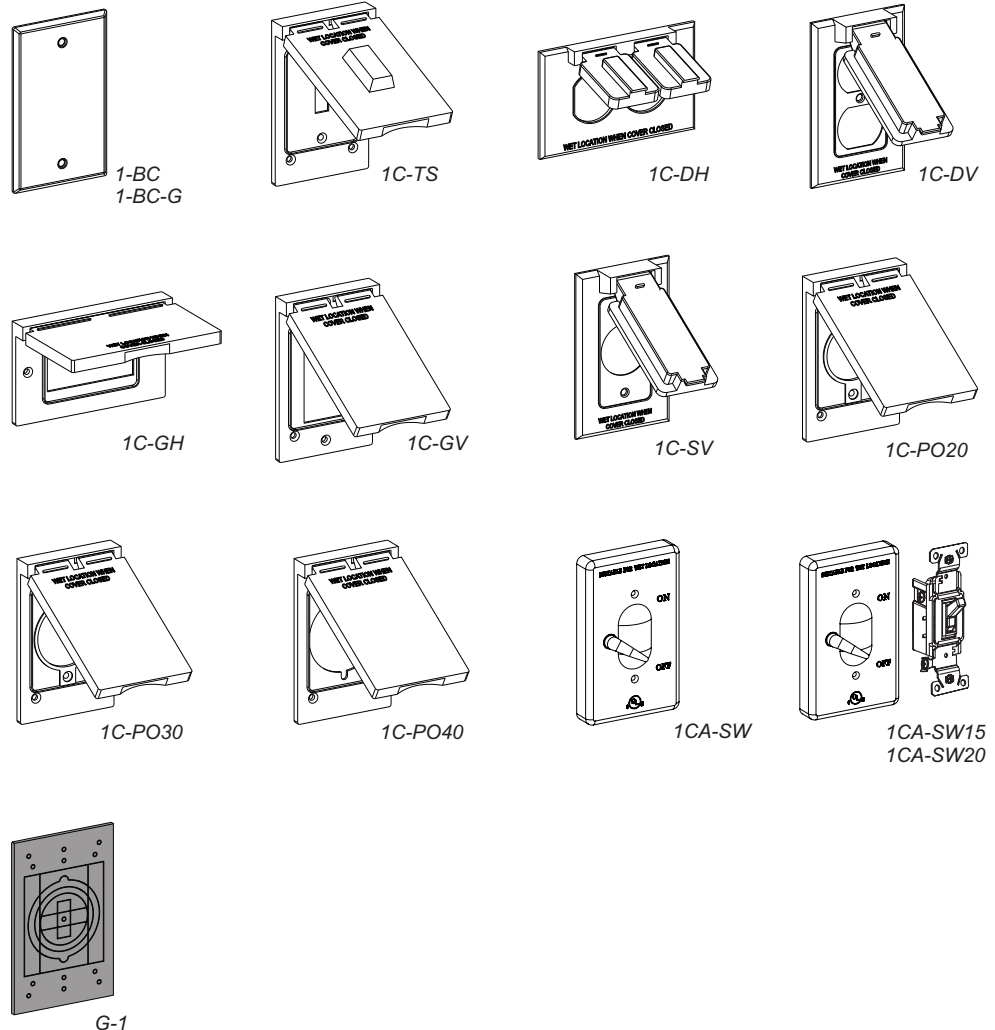

C4 | Weatherproof Covers



Weatherproof


PLASTIC 1-GANG DEVICE COVERS

2-3/4" W x 4-1/2" H


PRODUCT FEATURES

- ▶ Polycarbonate Composite
- ▶ Gasket included
- ▶ Device mounted
- ▶ Meets NEC Article 406.9 (A) for damp and wet locations (for more information see Section W)


Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.
		Gray	White	
1CP-DH	Duplex/Combo. Device - Horizontal	1CP-DH	1CP-DH-W	20
1CP-DV	Duplex/Combo. Device - Vertical	1CP-DV	1CP-DV-W	20
1CP-GV	GFCI - Vertical	1CP-GV	1CP-GV-W	20



1CP-DH



1CP-DV



1CP-GV


1-GANG DEVICE COVERS WITH PADLOCK HASP

2-3/4" W x 4-1/2" H


PRODUCT FEATURES

- ▶ Zinc Die Cast
- ▶ Gasket included
- ▶ Padlock not included


Cat. No.	Description	Std. Pkg.
1CL-DV	Duplex/Combo. Device - Vertical, Device Mounted	25
1CL-GV	GFCI - Vertical, Box Mounted	25
1CL-SV	Single recept. or Switch Vertical - 1.406" Diameter, Device Mounted	25



1CL-DV



1CL-GV



1CL-SV


1-GANG RAISED COVERS

2-7/8" W x 4-5/8" H


PRODUCT FEATURES

- ▶ Die Cast Copper-Free Aluminum
- ▶ Gasket included
- ▶ Closure Plugs included (except RE-1, see website for details)


Cat. No.	Outlet Holes	Hole Size	Color (Cat. No. - Color Code)			Std. Pkg.
			Gray	Bronze	White	
RE-1	1	1/2"	RE-1	RE-1-BR	RE-1-W	25
RE-2	2	1/2"	RE-2	RE-2-BR	RE-2-W	25
RE-3	3	1/2"	RE-3	RE-3-BR	RE-3-W	25



RE-1



RE-2



RE-3


2-GANG BLANK AND DEVICE COVERS

4-9/16" W x 4-1/2" H

PRODUCT FEATURES

- ▶ Zinc Die Cast (Except 2-BC, 2-BC-G, 2CA-2SW, 2CA-SW15 & 2CA-SW20)
- ▶ Powder Coat Finish
- ▶ Gasket Included
- ▶ Device mounted:
2C-2D, 2C-2S, 2C-DH, 2CL-PO60, 2CA-2SW, 2CA-SW15, 2CA-SW20
- ▶ Box mounted:
2-BC, 2-BC-G, 2C-2G, 2C-GD, 2C-SD, 2C-GS, 2C-2SW
- ▶ Meets NEC Article 406.9 (A) for and wet locations (for more information see Section W)

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		Gray	Bronze	White	
2-BC	Aluminum Blank (unpainted)	2-BC	-	-	25
2-BC-G	Heavy-Duty Galvanized Steel Blank	2-BC-G	2-BC-BR	2-BC-W	25
2C-2D	Two duplex receptacles	2C-2D	2C-2D-BR	2C-2D-W	12
2C-2G	Two GFCI	2C-2G	2C-2G-BR	2C-2G-W	12
2C-2S	Single recept. or Two switches - 1.406" diameter	2C-2S	2C-2S-BR	2C-2S-WH	12
2C-GD	One GFCI, One Duplex	2C-GD	-	-	12
2C-SD	One Duplex, One Single recept. - 1.406" diameter	2C-SD	-	-	12
2C-GS	One GFCI, one switch or Single recept. - 1.406" diameter	2C-GS	-	-	12
2C-DH	Oversized One Duplex - Horizontal device mount unit has K.O.'s for box mounting	2C-DH	-	-	12
2CL-PO60	One 30, 50, 60 Amp 3 & 4 Wire With Built-In Padlock Hasp (Padlock not included) - 2.641" diameter	2CL-PO60	-	-	12
2CA-2SW	Two Aluminum Levers, compatible with Standard Toggle Switches (not included)	2CA-2SW	2CA-2SW-BR	2CA-2SW-W	12
2CA-SW15	Two levers & Two 15A Single-Pole Switches	2CA-SW15	2CA-SW15-BR	2CA-SW15-W	12
2CA-SW20	Two levers & Two 20A Single-Pole Switches	2CA-SW20	2CA-SW20-BR	2CA-SW20-W	12
G-2	Universal 2-Gang Foam Gasket	G-2 (Black Only)			50

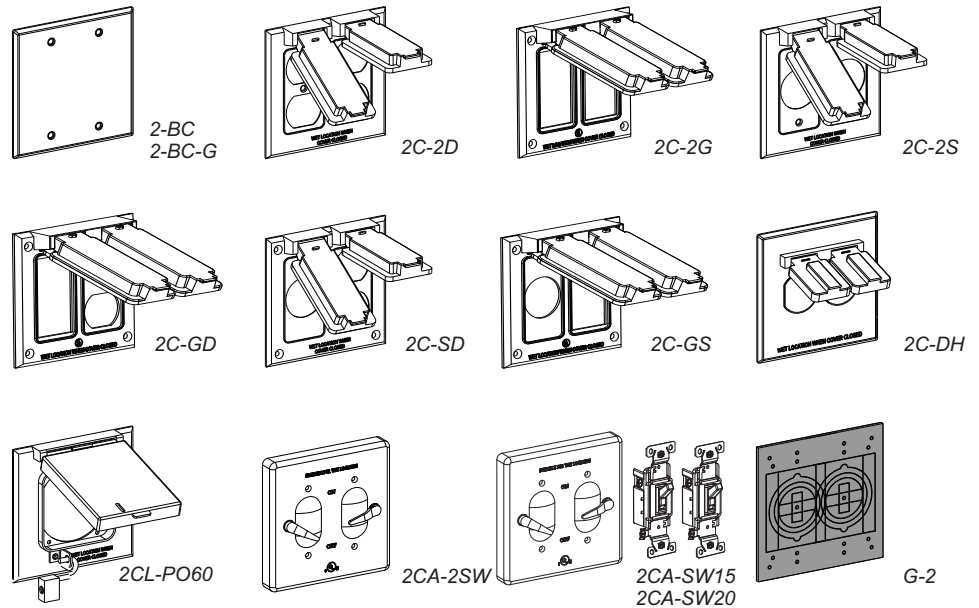

3-GANG BLANK AND DEVICE COVERS


6-3/8" W x 4-1/2" H

PRODUCT FEATURES

- ▶ Zinc Die Cast
- ▶ Gray Powder Coat Finish
- ▶ Gasket Included
- ▶ Device mounted

Cat. No.	Description	Std. Pkg.
3-BC	Aluminum Blank	10
*3C-3D	Three Duplex receptacles	20
*3C-3G	Three GFCI	20
*3C-3S	Three Single recept. or Switches - 1.406" Diameter	20

*While Supplies Last - Superseded by Universal Covers, pg. C2

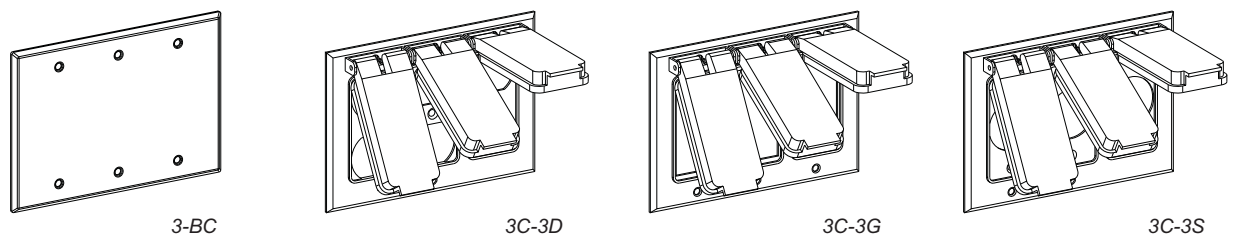

C6 | Weatherproof Boxes

1-GANG BOXES 2" DEEP


2-3/4" W x 4-1/2" H

PRODUCT FEATURES


- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Ground Screw installed
- ▶ Lugs included
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging




Cat. No.	Outlet Holes	Hole Size	Color (Cat. No. - Color Code)			Cu. Inch	Std. Pkg.
			Gray	Bronze	White		
1B50-3	3	1/2"	1B50-3	1B50-3-BR	1B50-3-W	18.3	20
1B50-4	4	1/2"	1B50-4	1B50-4-BR	1B50-4-W	18.3	20
1B50-5	5	1/2"	1B50-5	1B50-5-BR	1B50-5-W	18.3	20
1B50-5X	5	1/2"	1B50-5X	-	-	18.3	20
1B75-3	3	3/4"	1B75-3	1B75-3-BR	1B75-3-W	18.3	20
1B75-4	4	3/4"	1B75-4	1B75-4-BR	1B75-4-W	18.3	20
1B75-5	5	3/4"	1B75-5	1B75-5-BR	1B75-5-W	18.3	20
1B75-5X	5	3/4"	1B75-5X	-	-	18.3	20
1B100-3	3	1"	1B100-3	-	-	18.3	20




1B50-3
1B75-3
1B100-3



1B50-4
1B75-4



1B50-5
1B75-5



1B50-5X
1B75-5X

1-GANG DEEP BOXES 2-5/8" DEEP


2-3/4" W x 4-1/2" H

PRODUCT FEATURES


- ▶ Gray Finish
- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Ground Screw installed
- ▶ Lugs included
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging




Cat. No.	Outlet Holes	Hole Size	Cu. Inch	Std. Pkg.
1DB50-3	3	1/2"	23.8	12
1DB50-4	4	1/2"	23.8	12
1DB50-5X	5	1/2"	23.8	12
1DB75-3	3	3/4"	23.8	12
1DB75-4	4	3/4"	23.8	12
1DB75-5X	5	3/4"	23.8	12
1DB100-3	3	1"	23.8	12
1DB100-5X	5	1"	23.8	12



1DB50-3
1DB75-3
1DB100-3



1DB50-4
1DB75-4



1DB50-5X
1DB75-5X
1DB100-5X

2-GANG BOXES 2" DEEP


4-9/16" W x 4-1/2" H

PRODUCT FEATURES


- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Ground Screw installed
- ▶ Lugs included
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging




Cat. No.	Outlet Holes	Hole Size	Color (Cat. No. - Color Code)			Cu. Inch	Std. Pkg.
			Gray	Bronze	White		
2B50-3	3	1/2"	2B50-3	2B50-3-BR	2B50-3-W	30.5	12
2B50-4	4	1/2"	2B50-4	-	-	30.5	12
2B50-5	5	1/2"	2B50-5	2B50-5-BR	2B50-5-W	30.5	12
2B50-5X	5	1/2"	2B50-5X	-	-	30.5	12
2B50-6X	6	1/2"	2B50-6X	-	-	30.5	12
2B50-7	7	1/2"	2B50-7	-	-	30.5	12
2B50-7X	7	1/2"	2B50-7X	-	-	30.5	12
2B50-9	9	1/2"	2B50-9	-	-	30.5	12
2B75-3	3	3/4"	2B75-3	2B75-3-BR	2B75-3-W	30.5	12
2B75-4	4	3/4"	2B75-4	-	-	30.5	12
2B75-5	5	3/4"	2B75-5	2B75-5-BR	2B75-5-W	30.5	12
2B75-5X	5	3/4"	2B75-5X	-	-	30.5	12
2B75-6X	6	3/4"	2B75-6X	-	-	30.5	12
2B75-7	7	3/4"	2B75-7	-	-	30.5	12
2B75-7X	7	3/4"	2B75-7X	-	-	30.5	12
2B75-9	9	3/4"	2B75-9	-	-	30.5	12
2B100-3	3	1"	2B100-3	2B100-3-BR	2B100-3-W	30.5	12
2B100-4	4	1"	2B100-4	-	-	30.5	12
2B100-5X	5	1"	2B100-5X	-	-	30.5	12




2B50-3
2B75-3
2B100-3




2B50-4
2B75-4
2B100-4




2B50-5
2B75-5




2B50-5X
2B75-5X
2B100-5X




2B50-6X
2B75-6X



2B50-7
2B75-7



2B50-7X
2B75-7X



2B50-9
2B75-9

2-GANG DEEP BOXES 2-5/8" DEEP


4-9/16" W x 4-1/2" H

PRODUCT FEATURES


- ▶ Gray Finish
- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Ground Screw installed
- ▶ Lugs included
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging



Cat. No.	Outlet Holes	Hole Size	Cu. Inch	Std. Pkg.
2DB50-5	5	1/2"	39.1	9
2DB75-5	5	3/4"	39.1	9
2DB100-5	5	1"	39.1	9
2DB75-7X	7	3/4"	39.1	9
2DB100-7X	7	1"	39.1	9



2DB50-5
2DB75-5
2DB100-5



2DB75-7X
2DB100-7X

C8 | Weatherproof Boxes



Weatherproof

3-GANG DEEP BOX 2-5/8" DEEP


6-3/8" W x 4-1/2" H

PRODUCT FEATURES

- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Gray Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Ground Screw installed
- ▶ Lugs included
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging



Cat. No.	Outlet Holes	Hole Size	Cubic Inch	Std. Pkg.
3DB50-7	7	1/2"	54.0	10
3DB75-7	7	3/4"	54.0	10
3DB100-7	7	1"	54.0	10



3DB50-7
3DB75-7
3DB100-7


PLASTIC MODIFIABLE WEATHERPROOF BOXES

PRODUCT FEATURES


- ▶ Patented design
- ▶ Field-Modifiable Box
- ▶ Embossed Guidelines for hole positioning
- ▶ Make hole anywhere
- ▶ Use with any device cover
- ▶ (2) 1/2" and (2) 3/4" Locknuts included
- ▶ Lugs Included



Cat. No.	No. of Gangs	Depth	Dimension W x H	Cubic Inch	Color (Cat. No. - Color Code)		Std. Pkg.
					Gray	White	
1PB	1	2-5/16"	2-13/16" x 4-5/8"	22.5	1PB-G	1PB-W	25
2PB	2	2-9/16"	4-9/16" x 4-9/16"	42.5	2PB-G	2PB-W	25



1PB



2PB

1 BOX DOES IT ALL!

PATENTED

ORBIT INDUSTRIES EXCLUSIVE



PLASTIC BLANK COVER WITH GASKET

PRODUCT FEATURES

- ▶ Use with 1PB or 2PB

PATENTED


ORBIT INDUSTRIES EXCLUSIVE



Cat. No.	No. of Gangs	Dimension W x H	Color (Cat. No. - Color Code)		Std. Pkg.
			Gray	White	
1PC	1	3" x 4-3/4"	1PC-G	1PC-W	25
2PC	2	4-3/4" x 4-3/4"	2PC-G	2PC-W	25



1PC



2PC


1-GANG EXTENSION RINGS 1" DEEP

2-3/4" W x 4-1/2" H


PRODUCT FEATURES

- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Gray Powder Coat Finish
- ▶ Closure Plugs included (except EXR-1, see website for details)
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging

Cat. No.	Outlet Holes	Hole Size	Cubic Inch	Std. Pkg.
EXB50-4	4	1/2"	9.5	12
EXB50-6	6	1/2"	9.5	12
EXB75-4	4	3/4"	9.5	12
EXB75-6	6	3/4"	9.5	12
EXR-1	-	-	10.0	24




EXB50-4
EXB75-4



EXB50-6
EXB75-6



EXR-1



Exploded View,
EXR-1 Shown Installed

Weatherproof


1-GANG FLANGED EXTENSION BOXES 1-1/2" DEEP

3-1/2" W x 5-1/4" H


PRODUCT FEATURES

- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Gray Powder Coat Finish
- ▶ Closure Plugs included (see website for details)
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging


Cat. No.	Outlet Holes	Hole Size	Cubic Inch	Std. Pkg.
EXF50-2	2	1/2"	13.5	10
EXF50-4	4	1/2"	13.5	10
EXF50-6	6	1/2"	13.5	10
EXF75-2	2	3/4"	13.5	10
EXF75-4	4	3/4"	13.5	10
EXF75-6	6	3/4"	13.5	10



EXF50-2
EXF75-2



EXF50-4
EXF75-4



EXF50-6
EXF75-6


2-GANG EXTENSION RINGS 1" DEEP

4-9/16" W x 4-1/2" H


PRODUCT FEATURES

- ▶ Die Cast Copper-Free Aluminum
- ▶ Premium Gray Powder Coat Finish
- ▶ Closure Plugs included (except EXR-2, see website for details)
- ▶ Individually shrink-wrapped with barcode
- ▶ Retail shelf packaging


Cat. No.	Outlet Holes	Hole Size	Cubic Inch	Std. Pkg.
2EXB50-6	6	1/2"	15.0	9
2EXB75-6	6	3/4"	15.0	9
2EXB50-8	8	1/2"	15.0	9
2EXB75-8	8	3/4"	15.0	9
EXR-2	-	-	16.3	12




2EXB50-6
2EXB75-6



2EXB50-8
2EXB75-8



EXR-2

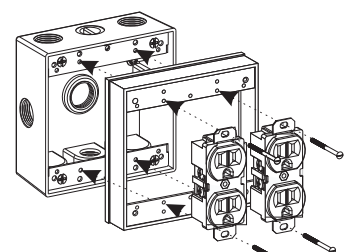

Exploded View,
EXR-2 Shown Installed



File E227970

www.orbitelectric.com



C10 | Round Boxes, Extension Rings & Covers




4" ROUND BOXES & EXTENSION RINGS

1-1/2" Deep


PRODUCT FEATURES

- ▶ Die Cast Aluminum
- ▶ Closure Plugs included (except EXR-R, see website for details)
- ▶ #10-24 mounting screws and ground screw included
- * For Fixture/Luminaire Support of 50lbs or less


Cat. No.	Outlet Holes	Hole Size	Color (Cat. No. - Color Code)			Cu. Inch	Std. Pkg.
			Gray	Bronze	White		
*RB50-5	5	1/2"	RB50-5	RB50-5-BR	RB50-5-W	15.8	16
*RB75-5	5	3/4"	RB75-5	-	-	15.8	16
EXR50-4	4	1/2"	EXR50-4	-	-	19.0	16
EXR75-4	4	3/4"	EXR75-4	-	-	19.0	16
EXR-R	-	-	EXR-R	-	-	19.0	50



*RB50-5
*RB75-5



EXR50-4
EXR75-4



EXR-R


Weatherproof

4" ROUND COVERS


PRODUCT FEATURES

- ▶ Die Cast Aluminum
- ▶ Closure Plugs included (except RBC-4, RC-1, G-R, see website for details)
- ▶ Gasket Included
- ▶ #10-24 mounting screws included in covers
- * Stamped Aluminum, Natural Color


Cat. No.	Outlet Holes	Hole Size	Color (Cat. No. - Color Code)				Std. Pkg.
			Gray	Bronze	Black	White	
*RBC-4	-	-	-	-	-	-	25
RC-1	1	1/2"	RC-1	RC-1-BR	-	RC-1-W	25
RC-2	2	1/2"	RC-2	RC-2-BR	-	RC-2-W	25
RC-3D (Dome)	3	1/2"	RC-3D	-	-	-	25
RC-3	3	1/2"	RC-3	RC-3-BR	-	RC-3-W	25
G-R	Foam Gasket				G-R		25




*RBC-4




RC-1




RC-2



RC-3D



RC-3



G-R

Can be mounted on a 3" Plaster Ring

1-GANG CAST DEVICE BOXES 2" DEEP

3" W x 6-1/10" H

PRODUCT FEATURES

- ▶ Malleable Iron
- ▶ Zinc Electroplated
- ▶ Dead End or Feed Through Configurations
- ▶ For both outdoor and indoor use

Cat. No.	Outlet Holes	Hole Size	Configuration	Std. Pkg.
1MFS-50	1	1/2"	Dead End	1
1MFS-75	1	3/4"	Dead End	1
1MFS-100	1	1"	Dead End	1
1MFSC-50	2	1/2"	Feed Through	1
1MFSC-75	2	3/4"	Feed Through	1
1MFSC-100	2	1"	Feed Through	1



1MFS



1MFSC

1-GANG DEEP CAST DEVICE BOXES 2-7/10" DEEP

3" W x 6-1/10" H

PRODUCT FEATURES

- ▶ Malleable Iron
- ▶ Zinc Electroplated
- ▶ Dead End or Feed Through Configurations
- ▶ For both outdoor and indoor use

Cat. No.	Outlet Holes	Hole Size	Configuration	Std. Pkg.
1MFD-50	1	1/2"	Dead End	1
1MFD-75	1	3/4"	Dead End	1
1MFD-100	1	1"	Dead End	1
1MFDC-50	2	1/2"	Feed Through	1
1MFDC-75	2	3/4"	Feed Through	1
1MFDC-100	2	1"	Feed Through	1



1MFD



1MFDC

1-GANG CAST DEVICE BOX COVERS

PRODUCT FEATURES

- ▶ Malleable Iron or Steel
- ▶ Zinc Electroplated
- ▶ For both with FS & FD Cast Device Boxes


Cat. No.	Description	Std. Pkg.
1MFC-B	Blank, Malleable Iron	20
1MFC-D	Duplex, Malleable Iron	20
1MFC-TS	Guarded Toggle Switch, Malleable Iron	20
1SFC-B	Blank, Steel	25
1SFC-D	Duplex, Steel	25
1SFC-TS	Unguarded Toggle Switch, Steel	25
1SFC-G	GFI, Steel	25
FG-1	Gasket, Neoprene	50



1MFC-B



1MFC-D



1MFC-TS



1MFC-B



1MFC-D



1MFC-TS



1MFC-G

Weatherproof



File E227970

C12 | Swimming Pool Junction Boxes



SWIMMING POOL JUNCTION BOXES

PRODUCT FEATURES

- ▶ Metal/Plastic
- ▶ For use with installation of underwater pool lights
- ▶ Meets NEC Article 680.52 (A)(B) (for more information see Section W)
- ▶ Solid Brass Wiring Platform with grounding post and 3 ground terminals for use with metallic or PVC conduit

Weatherproof

Cat. No.	Description	Size & Remarks	Std. Pkg.
SJB-50/100	Two 1/2", One 1" outlets With 1" to 1/2" port adapter Black Lexan Cover with built-in gasket Brass bottom	3.5"W x 5.38"H x 2"D 22.0 Cu. In.	1
SJB100-3 (Black) SJB100-3-W (White)	Two 3/4", One 1" outlets Black or White Lexan Material with built-in gasket Brass Terminal Block, Brass Ground Lug	4"Dia. X 1.75"D 14.0 Cu. In. (Use with PVC Pipe)	1
SJB100-5 (Black) SJB100-5-W (White)	One 1/2", Two 3/4", Two 1" outlets Black or White Lexan Material with built-in gasket Brass Terminal Block, Brass Ground Lug	5"Dia. X 2"D 23.0 Cu. In. (Use with PVC Pipe)	1
*SJB-ROD	4-Ft. Solid PVC Support Rod for Lexan Boxes	1/2" Dia X 4'	2



*SJB-ROD



SJB-50/100



SJB100-3



SJB100-3-W



SJB100-5




SJB100-5-W

LAMP HOLDERS

PRODUCT FEATURES


- ▶ Die Cast Aluminum & Zinc
- ▶ 120V
- ▶ PAR38 Lamp Not Included, 90W Max. for LH150-SG, 150W Max. for LH300

Cat. No.	Description	Color (Cat. No. - Color Code)				Std. Pkg.
		Gray	Bronze	Black	White	
LH150-SG	Lampholder with Premium Silicon Outer Gasket	LH150-SG-GY	LH150-SG-BR	LH150-SG-BK	LH150-SG-W	25
*LH300	Premium Grade Porcelain socket with Nickel contacts and Teflon-jacketed wire leads					24



LH150-SG

Includes Premium Silicon Gasket

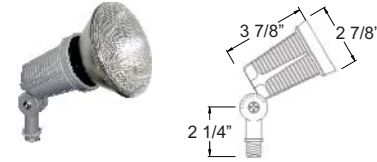

*LH300

Shown Installed

LAMP HOLDER ACCESSORIES

Cat. No.	Description	Colors Available	Std. Pkg.
BASE-R	Round Surface-Mount Bracket 1/2" Female, Cast Aluminum	BK, BR, GN, VG, WH	10
BASE-SB	Round Surface-Mount Bracket 1/2" Female, Solid Brass	Antique Brass, *Nat. Brass, Acid Grn	10
TB-LV	Tree-Hugger Canopy, Low-Voltage	BR, GN, VG, WH	1



BASE-R



BASE-SB



TB-LV

PHOTOELECTRIC CONTROLS

PRODUCT FEATURES

- ▶ 1.5VA Power Consumption
- ▶ 6-20 Lx On Level
- ▶ 30-60 Lx Off Level
- ▶ 2-Year Warranty

Cat. No.	Description	Rating		Std. Pkg.
		Tungsten	Ballast	
PC-1	120V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1-277	208/277V 50/60Hz, Standard Contractor Grade	2000 W	1900VA	12
PC-1S	120V 50/60Hz, Swivel-Type	1200 W	1000VA	12
PC-1SH	120V 50/60Hz, High-Wattage Swivel-Type	2000 W	1900VA	12
PC-1F	120V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1F-277	208/277V 50/60Hz, Wire-In Flush Model	500 W	850VA	12
PC-1P	120V 50/60Hz, with Weatherproof Plate & Gasket	500 W	850VA	12
PC-1T	120~277V 50/60Hz, Twist Lock E-Ballast: 8A@120VAC, 5A@208-277VAC	1000 W	1800VA	12



PC-1
PC-1-277



PC-1S



PC-1SH



PC-1F
PC-1F-277



PC-1P



PC-1T



File E303572
File E224007
File E348511


C14 | Weatherproof Accessories

WEATHERPROOF CLOSURE PLUGS


PRODUCT FEATURES

- ▶ Die Cast Aluminum
- ▶ Poly Bagged with Barcode
- ▶ Must purchase Std. Pkg. qty


Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Ctn.
		Gray	Bronze	White		
PL-50	1/2" Closure Plug	PL-50	PL-50-BR	PL-50-W	5	500
PL-75	3/4" Closure Plug	PL-75	PL-75-BR	PL-75-WH	5	500
PL-100	1" Closure Plug	PL-100	-	-	2	200



PL-50




PL-75



PL-100

WEATHERPROOF ACCESSORIES

Cat. No.	Description	Color	Std. Pkg.
LUG	Mounting Lugs, Each unit is a poly bag containing 2 lugs and 2 screws	Natural	100
SW-SP	1/2" Brass Spacer for mounting a Toggle Switch in a Lever Switch Cover	Natural	100
G	Inner Fiber Gasket for LH150 Weatherproof Lamp Holder	-	250
SG	Premium Silicon Outer Sealing Gasket for LH150 Weatherproof Lamp Holder	-	25
WG-38	PAR38 Wire Guard for Weatherproof Lamp Holders, Zinc-Plated Steel	-	5
BH-50	1/2" Zinc-Die Cast Weatherproof Box Holder	-	25



LUG




SW-SP



G



SG



WG-38



BH-50



Pull Elbows & Conduit Elbows Quick Reference

For More Information See Fittings Section on Page D10, D36, D60, D61



PEB-50
PEB-75
PEB-100
PEB-125



PE-50
PE-75
PE-100
PE-125



SSPEB-G50
SSPEB-G75
SSPEB-G100
SSPEB-G125



SSPE-G50
SSPE-G75
SSPE-G100
SSPE-G125



SSPE-50
SSPE-75
SSPE-100
SSPE-125



EEL22-50
EEL22-75
EEL22-100
EEL22-125
EEL22-150
EEL22-200
EEL22-250
EEL22-300
EEL22-350
EEL22-400



EEL45-50
EEL45-75
EEL45-100
EEL45-125
EEL45-150
EEL45-200
EEL45-250
EEL45-300
EEL45-350
EEL45-400



EEL90-50
EEL90-75
EEL90-100
EEL90-125
EEL90-150
EEL90-200
EEL90-250
EEL90-300
EEL90-350
EEL90-400



REL22-50
REL22-75
REL22-100
REL22-125
REL22-150
REL22-200
REL22-250
REL22-300
REL22-350
REL22-400



REL45-50
REL45-75
REL45-100
REL45-125
REL45-150
REL45-200
REL45-250
REL45-300
REL45-350
REL45-400



REL90-50
REL90-75
REL90-100
REL90-125
REL90-150
REL90-200
REL90-250
REL90-300
REL90-350
REL90-400

Weatherproof



Conduit Bodies Quick Reference

For More Information See Pages E1-E11

Weatherproof



LB-50A
LB-75A
LB-100A
LB-125A
LB-150A
LB-200A
LB-250A
LB-300A
LB-350A
LB-400A



LL-50A
LL-75A
LL-100A
LL-125A
LL-150A
LL-200A
LL-250A
LL-300A
LL-400A



LR-50A
LR-75A
LR-100A
LR-125A
LR-150A
LR-200A
LR-250A
LR-300A
LR-400A



C-50A
C-75A
C-100A
C-125A
C-150A
C-200A
C-250A
C-300A
C-400A



T-50A
T-75A
T-100A
T-125A
T-150A
T-200A
T-250A
T-300A
T-400A



SLB-50
SLB-75
SLB-100
SLB-125
SLB-150
SLB-200



LB-50AS
LB-75AS
LB-100AS
LB-125AS
LB-150AS
LB-200AS
LB-250AS
LB-300AS
LB-350AS
LB-400AS

NEW



LL-50AS
LL-75AS
LL-100AS
LL-125AS
LL-150AS
LL-200AS
LL-250AS
LL-300AS
LL-400AS

NEW



LR-50AS
LR-75AS
LR-100AS
LR-125AS
LR-150AS
LR-200AS
LR-250AS
LR-300AS
LR-400AS

NEW



C-50AS
C-75AS
C-100AS
C-125AS
C-150AS
C-200AS
C-250AS
C-300AS
C-400AS

NEW



T-50AS
T-75AS
T-100AS
T-125AS
T-150AS
T-200AS
T-250AS
T-300AS
T-400AS

NEW



LBM-150
LBM-200
LBM-250
LBM-300
LBM-350
LBM-400



LB-50
LB-75
LB-100
LB-125
LB-150
LB-200
LB-250
LB-300
LB-350
LB-400



LL-50
LL-75
LL-100
LL-125
LL-150
LL-200
LL-250
LL-300
LL-400



LR-50
LR-75
LR-100
LR-125
LR-150
LR-200
LR-250
LR-300
LR-400



C-50
C-75
C-100
C-125
C-150
C-200
C-250
C-300
C-400



T-50
T-75
T-100
T-125
T-150
T-200
T-250
T-300
T-400



Malleable Iron

MLB-50
MLB-75
MLB-100
MLB-125
MLB-150
MLB-200
MLB-250
MLB-300
MLB-350
MLB-400



Malleable Iron

MLL-50
MLL-75
MLL-100
MLL-125
MLL-150
MLL-200
MLL-250
MLL-300
MLL-350
MLL-400



Malleable Iron

MLR-50
MLR-75
MLR-100
MLR-125
MLR-150
MLR-200
MLR-250
MLR-300
MLR-350
MLR-400



Malleable Iron

MC-50
MC-75
MC-100
MC-125
MC-150
MC-200
MC-250
MC-300
MC-350
MC-400



Malleable Iron

MT-50
MT-75
MT-100
MT-125
MT-150
MT-200
MT-250
MT-300
MT-350
MT-400



Set-Screw EMT

SSLB-50
SSLB-75
SSLB-100
SSLB-125
SSLB-150
SSLB-200
SSLB-250
SSLB-300
SSLB-350
SSLB-400



Set-Screw EMT

SSLR-50
SSLR-75
SSLR-100
SSLR-125
SSLR-150
SSLR-200



Set-Screw EMT

SSLL-50
SSLL-75
SSLL-100
SSLL-125
SSLL-150
SSLL-200



Set-Screw EMT

SSC-50
SSC-75
SSC-100
SSC-125
SSC-150
SSC-200



Set-Screw EMT

SST-50
SST-75
SST-100
SST-125
SST-150
SST-200



CG-50
CG-75
CG-100
CG-125/150
CG-200
CG-250/300
CG-350/400



G-50
G-75
G-100
G-125/150
G-200
G-250/300
G-350-400



Conduit Bodies Quick Reference

For More Information See Pages E12-E15

Weatherproof

FORM 7 GRAY IRON CONDUIT BODIES



LB7-50
LB7-75
LB7-100
LB7-125
LB7-150
LB7-200
LB7-250
LB7-300
LB7-350
LB7-400



LL7-50
LL7-75
LL7-100
LL7-125
LL7-150
LL7-200
LL7-250
LL7-300
LL7-350
LL7-400



LR7-50
LR7-75
LR7-100
LR7-125
LR7-150
LR7-200
LR7-250
LR7-300
LR7-350
LR7-400



C7-50
C7-75
C7-100
C7-125
C7-150
C7-200
C7-250
C7-300



T7-50
T7-75
T7-100
T7-125
T7-150
T7-200
T7-250
T7-300
T7-350
T7-400



SCG7-50
SCG7-75
SCG7-100
SCG7-125
SCG7-150
SCG7-200
SCG7-250/300
SCG7-350/400



GICG7-50
GICG7-75
GICG7-100
GICG7-125
GICG7-150
GICG7-200
GICG7-250/300
GICG7-350/400

FORM 8 GRAY IRON CONDUIT BODIES



LB8-50
LB8-75
LB8-100
LB8-125
LB8-150
LB8-200
LB8-250
LB8-300
LB8-350
LB8-400



LL8-50
LL8-75
LL8-100
LL8-125
LL8-150
LL8-200
LL8-250
LL8-300



LR8-50
LR8-75
LR8-100
LR8-125
LR8-150
LR8-200
LR8-250
LR8-300



C8-50
C8-75
C8-100
C8-125
C8-150
C8-200
C8-250
C8-300



T8-50
T8-75
T8-100
T8-125
T8-150
T8-200
T8-250
T8-300



SCG8-50
SCG8-75
SCG8-100
SCG8-125
SCG8-150
SCG8-200
SCG8-250/300
SCG8-350/400



GICG8-50
GICG8-75
GICG8-100
GICG8-125
GICG8-150
GICG8-200
GICG8-250/300
GICG8-350/400