



Orbit features an extensive variety of Electrical Fittings in sizes and shapes to fit any application. Each fitting is constructed to meet our high standards, resulting in a group of products consisting of a quality found nowhere else. Our vast selection includes EMT, Rigid, Liquid Tight, Conduit Bodies, Elbows, Straps, Groundings and more. Most of our UL listed metal fittings for metal cable, conduit and tubing are considered suitable for grounding for use in circuits over and under 250V, and where installed in accordance with the NEC.

EMT Fittings



Flex Fittings



AC/MC Fittings



Liquid Tight Fittings



Groundings



Rigid/IMC Fittings



Straps, Clamps, Hangers



Conduit Elbows



And more...



MATERIALS STEEL, DIE CAST ZINC, MALLEABLE IRON, AND PVC.



Steel



Die Cast Zinc



Malleable Iron



PVC

Orbit's fittings are available in a variety of sizes and high quality materials.

Steel



Steel Fittings offer a higher tensile strength and higher yield strength than Zinc Die-Cast Fittings. Machined from a solid bar of stock steel, Steel Fittings are coated with zinc plating for corrosion protection. Steel Fittings are suitable for dry and/or wet locations, and are considered to be “specification grade” fittings.

Zinc Die Cast



Zinc Die-Cast Fittings are quickly machined in one piece, making them very economical in price and light-weight when transported. Zinc Die-Cast Fittings are often deployed in short conduit runs and non-critical electrical work.

Non-Metallic



Non-Metallic PVC and Nylon Fittings are used in wet and/or dry locations when conduits and fittings are not subject to physical damage. Commonly used in residential applications, Non-Metallic Fittings are ideal when extra flexibility is desired for installation or maintenance.



Malleable Iron



Malleable Iron Fittings are manufactured from a hot liquid metal poured into a mold, then cooled to produce a casting that is extremely tough. Malleable Iron Fittings are also coated with zinc plating for corrosion protection. Able to withstand hammering, machining, and extreme temperatures without breaking, Malleable Iron Fittings are often required by designers and federal specs for industrial applications.

Electrical Fittings



Bronze

Bronze Fittings are composed of a copper-tin alloy that is both highly conductive and corrosion resistant. Bronze is regarded as the “go-to material” for grounding electrical service panels and equipment, especially for direct-burial (DB).



FULL LINE OF CONDUIT BODIES

AVAILABLE ON OUR WEBSITE OR IN THE **E** SECTION



Rigid-to-EMT Screw Combo Couplings | Pg. D2

Steel Rigid to EMT Set Screw Combo Couplings join un-threaded 1/2" thru 1" Rigid/IMC conduit to 1/2" thru 1" EMT conduit. A Phillips or standard-head screwdriver may be used to tighten the fitting's set screws on either end. Suitable for dry locations. Sealing tape may be used to create a concrete tight seal.



EMT Slip Coupling Set-Screw Type | Pg. D2



Steel EMT slip couplings with set-screw type connections are commonly used to join two EMT conduits together. The unique center screw design allows for a seamless fit, eliminating the need for flex conduit between the prefab conduit racks. This feature not only saves time during prefabrication in the shop but also increases productivity in the field. Additionally, the steel construction provides mechanical protection and a secure connection between the conduits.

EMT-to-Liquid Tight Compression Combo Couplings | Pg. D3

Steel EMT-to-Liquid Tight Compression Combo Couplings join EMT raceway to metallic or non-metallic liquid tight conduit. One end of the coupling is Compression Type for 1/2" thru 1" EMT conduit; on the other end is a grounding ferrule locknut for 1/2" thru 1" liquid tight conduit. An internal sealing ring creates a rain-tight and concrete-tight seal between both types of conduit.



Rigid-to-EMT Compression Combo Couplings | Pg. D3



Steel Rigid to EMT Compression Combo Couplings improve upon more common set-screw type combination fittings. One end of the coupling is threaded for 1/2" thru 1" Rigid/IMC conduit; the other end is un-threaded for 1/2" thru 1" EMT. Unlike set-screw fittings, the SREC Series greatly reduces the risk of seizing screws, or the accidental bending of EMT due to over-torque. Compression type fittings are also wet location or concrete rated.



Universal Strut Clamps | Pg. D7

Universal Strut Clamps can be inserted anywhere along slotted channel, and allow for remarkably tight spacing between conduits. 1/2" thru 2" is a single piece break-apart design without nut. 2-1/2" thru 4" is a two-piece design with nut and thicker wall.




Electrical Fittings

Saddle-Type Strut Clamps | Pg. D7

Saddle-Type Strut Clamps can be used to secure EMT, Rigid conduit, and FMC Conduit in 5/16" thru 4" trade sizes. No need to break-apart or reassemble thanks to its single-piece design.

Wide saddle and anti-rotation tabs prevent twisting when tightening screw. Universal bolt head stays captive so there are no loose screws to drop.

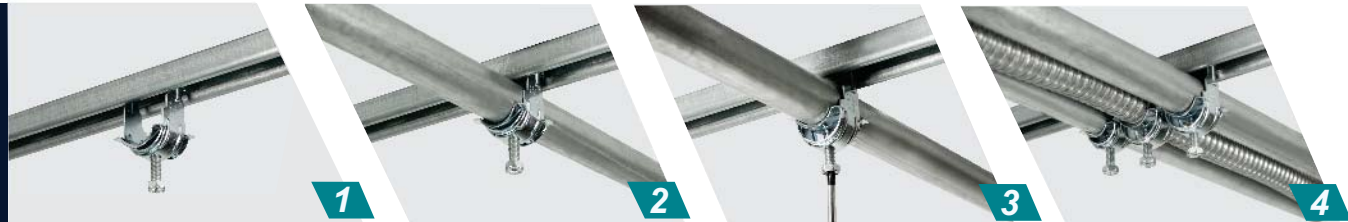

Double-Bite Set Screw Combo Couplings | Pg. D8

Tubular Steel Double-Bite Set Screw Combo Couplings feature a saddle-type clamp that rides up and down the screw, and grips flexible conduit better than squeeze-type combo couplings. This double-bite saddle clamp joins all common Flex, MC, and AC-type cable ranges to one end of the fitting. On the opposite end, a set screw joins 1/2" and 3/4" EMT conduit to create a seamless conduit transition. For dry locations only.



Double-Bite Compression Combo Couplings | Pg. D8



Tubular Steel Double-Bite Compression Combo Couplings also feature a saddle-type clamp, offering all the same advantages of its set screw counterpart above. However, this model features a compression nut in place of a set-screw so there is no risk of seizing screws, dropped screws, or bent EMT raceway. Zinc-plated steel design offers a higher tensile strength than common zinc die cast combo fittings. For dry locations only.


Double-Bite Connectors | Pg. D13

Steel Double-Bite Cable Connectors feature a dual-gripping saddle clamp shaped to fit metal cable jackets, preventing cable distortion and conductor damage. All models include an insulated throat to prevent conductor chaffing during wire pulls. Connector fits 1/2" thru 1" knockouts, and accommodates 3/8" thru 1" flexible metal conduit. For dry locations only.



Double-Snap Connectors | Pg. D16

Double-Snap Connectors work to make terminating AC/MC cables to steel boxes and enclosures easy and tool-free. Available for both new and old-work installations, each connector can be assembled to the cable or box without tools, resulting in a much faster installation. Both fittings are also easily removable and re-usable.

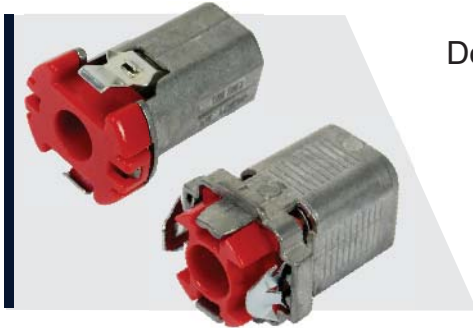

Rigid-to-Liquid Tight Compression Combo Couplings | Pg. D21

Steel Rigid-to-Liquid Tight Compression Couplings join Rigid or IMC raceway to metallic or non-metallic liquid tight conduit. One end of the coupling is threaded for 1/2" thru 2" Rigid conduit; on the other end is a grounding ferrule locknut for 1/2" thru 2" liquid tight conduit. This combo coupling design provides rain-tight and concrete-tight features.





Liquid Tight Connectors with Lay-In Lugs | Pg. D22, D23, D25

Malleable Iron Liquid Tight Connectors with Aluminum Lay-in Lugs are ideal when installations require copper or aluminum external bonding jumpers. Available in Straight, 45° and 90° angles, and accepts 3/8" thru 4" flexible liquid tight conduit (metallic and non-metallic). Sealing washer maintains a liquid tight connection when terminating in unthreaded openings.



Malleable Iron Rigid/IMC Connectors & Couplings Set-Screw Type | Pg. D31

Set-screw type Rigid/IMC connectors and Couplings are utilized in dry locations to bond unthreaded rigid or IMC conduits to electrical junction boxes or enclosures, or connect the ends of two unthreaded rigid or IMC conduits. Constructed from malleable iron, these connectors provide mechanical protection for the conduits and designated electrical junction box or enclosure. By eliminating the need to thread bald conduits, set-screw connectors simplify the installation process. For damp locations, set-screw connectors offer excellent corrosion protection with their zinc electroplated finish.



3-Piece Rigid Conduit Couplings | Pg. D33

3-Piece Rigid Conduit Couplings make it possible to join two lengths of threaded Rigid/IMC conduit that are difficult (or impossible) to turn. This malleable iron coupling is composed of an outer hex slip-on ring, an inner threaded ferrule, and hexagonal threaded nipple. Also useful for "breaking" long conduit runs, and a required coupling in many federal specifications. Trade sizes 1/2" thru 4".



STEEL EMT CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF7701	1/2"	50	500
OF7702	3/4"	25	250
OF7703	1"	10	100
OF7704	1-1/4"	10	100
OF7705	1-1/2"	10	50
OF7706	2"	5	50
OF7707	2-1/2"	-	12
OF7708	3"	-	12
OF7709	3-1/2"	-	6
OF7710	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"

STEEL INSULATED EMT CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ With Insulated Throat
- ▶ Concrete-Tight when taped

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Insulated color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF7701-S	1/2"	50	500
OF7702-S	3/4"	25	250
OF7703-S	1"	10	100
OF7704-S	1-1/4"	10	100
OF7705-S	1-1/2"	10	50
OF7706-S	2"	5	50
OF7707-S	2-1/2"	-	12
OF7708-S	3"	-	12
OF7709-S	3-1/2"	-	6
OF7710-S	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"

STEEL EMT COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF7711	1/2"	50	500
OF7712	3/4"	25	250
OF7713	1"	10	100
OF7714	1-1/4"	10	100
OF7715	1-1/2"	10	50
OF7716	2"	5	50
OF7717	2-1/2"	-	12
OF7718	3"	-	12
OF7719	3-1/2"	-	6
OF7720	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"





STEEL EMT SLIP COUPLING SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Used to join two ends of EMT together
- ▶ Diamond shape inspection window to ensure both ends of conduits are visible
- ▶ Back out center screw stop as necessary to slip coupling over conduit
- ▶ Fully install center screw stop between conduits



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SESCS-50 NEW	1/2"	50	500
SESCS-75 NEW	3/4"	25	250
SESCS-100 NEW	1"	10	100
SESCS-125 NEW	1-1/4"	-	25
SESCS-150 NEW	1-1/2"	-	25
SESCS-200 NEW	2"	-	20
SESCS-250 NEW	2-1/2"	-	12
SESCS-300 NEW	3"	-	12
SESCS-350 NEW	3-1/2"	-	6
SESCS-400 NEW	4"	-	6

STEEL RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Zinc Electroplated
- ▶ Concrete-Tight when taped



Cat. No.	Rigid Size	EMT Size	Std. Pkg.	Master Ctn.
SRECS-50	1/2"	1/2"	25	250
SRECS-75	3/4"	3/4"	10	100
SRECS-100	1"	1"	10	100

STEEL EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF7601	OF7601-W	1/2"	25	250
OF7602	OF7602-W	3/4"	25	250
OF7603	OF7603-W	1"	10	100
OF7604	OF7604-W	1-1/4"	10	100
OF7605	OF7605-W	1-1/2"	10	50
OF7606	OF7606-W	2"	5	50
OF7607	OF7607-W	2-1/2"	-	12
OF7608	OF7608-W	3"	-	12
OF7609	OF7609-W	3-1/2"	-	6
OF7610	OF7610-W	4"	-	6



STEEL INSULATED EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ With Insulated Throat
- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Insulated and Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF7601-S	OF7601-SW	1/2"	25	250
OF7602-S	OF7602-SW	3/4"	25	250
OF7603-S	OF7603-SW	1"	10	100
OF7604-S	OF7604-SW	1-1/4"	10	100
OF7605-S	OF7605-SW	1-1/2"	10	50
OF7606-S	OF7606-SW	2"	5	50
OF7607-S	OF7607-SW	2-1/2"	-	12
OF7608-S	OF7608-SW	3"	-	12
OF7609-S	OF7609-SW	3-1/2"	-	6
OF7610-S	OF7610-SW	4"	-	6



STEEL EMT COUPLINGS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF7611	OF7611-W	1/2"	25	250
OF7612	OF7612-W	3/4"	25	250
OF7613	OF7613-W	1"	10	100
OF7614	OF7614-W	1-1/4"	10	100
OF7615	OF7615-W	1-1/2"	10	50
OF7616	OF7616-W	2"	5	50
OF7617	OF7617-W	2-1/2"	-	12
OF7618	OF7618-W	3"	-	12
OF7619	OF7619-W	3-1/2"	-	6
OF7620	OF7620-W	4"	-	6



Compression Type



Rain-Tight

STEEL EMT TO LIQUID TIGHT COMBINATION COUPLINGS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight
- ▶ Rain-Tight



Cat. No.	EMT Size	LT Size	Std. Pkg.	Master Ctn.
SELTC-50	1/2"	1/2"	25	250
SELTC-75	3/4"	3/4"	10	100
SELTC-100	1"	1"	10	100



3/4"



1"

STEEL RIGID TO EMT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Compression type for EMT conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	RIGID Size	EMT Size	Std. Pkg.	Master Ctn.
SREC-50	1/2"	1/2"	25	100
SREC-75	3/4"	3/4"	25	100
SREC-100	1"	1"	10	40



1/2"





ZINC DIE CAST EMT CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Concrete-Tight when taped
- ▶ Combo Head Set-Screw

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF701	1/2"	100	1000
OF702	3/4"	50	500
OF703	1"	10	100
OF704	1-1/4"	10	100
OF705	1-1/2"	10	50
OF706	2"	5	50
OF707	2-1/2"	-	12
OF708	3"	-	12
OF709	3-1/2"	-	6
OF710	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"

ZINC DIE CAST INSULATED EMT CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Concrete-Tight when taped
- ▶ Combo Head Set-Screw

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Insulated color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF701-S	1/2"	50	500
OF702-S	3/4"	25	250
OF703-S	1"	10	100
OF704-S	1-1/4"	10	100
OF705-S	1-1/2"	10	50
OF706-S	2"	5	50
OF707-S	2-1/2"	-	12
OF708-S	3"	-	12
OF709-S	3-1/2"	-	6
OF710-S	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"

ZINC DIE CAST EMT COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Concrete-Tight when taped
- ▶ Combo Head Set-Screw

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF711	1/2"	50	500
OF712	3/4"	25	250
OF713	1"	10	100
OF714	1-1/4"	10	100
OF715	1-1/2"	10	50
OF716	2"	5	50
OF717	2-1/2"	-	12
OF718	3"	-	12
OF719	3-1/2"	-	6
OF720	4"	-	6



1/2" to 1"



1-1/4" to 2"



2-1/2" to 4"

ZINC DIE CAST EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF601	OF601-W	1/2"	50	500
OF602	OF602-W	3/4"	25	250
OF603	OF603-W	1"	10	100
OF604	OF604-W	1-1/4"	10	100
OF605	OF605-W	1-1/2"	10	50
OF606	OF606-W	2"	5	50
OF607	OF607-W	2-1/2"	-	12
OF608	OF608-W	3"	-	12
OF609	OF609-W	3-1/2"	-	6
OF610	OF610-W	4"	-	6



Compression Type



Rain-Tight

ZINC DIE CAST INSULATED EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Insulated and Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF601-S	OF601-SW	1/2"	50	500
OF602-S	OF602-SW	3/4"	25	250
OF603-S	OF603-SW	1"	10	100
OF604-S	OF604-SW	1-1/4"	10	100
OF605-S	OF605-SW	1-1/2"	10	50
OF606-S	OF606-SW	2"	5	50
OF607-S	OF607-SW	2-1/2"	-	12
OF608-S	OF608-SW	3"	-	12
OF609-S	OF609-SW	3-1/2"	-	6
OF610-S	OF610-SW	4"	-	6



Compression Type



Rain-Tight

ZINC DIE CAST EMT COUPLINGS COMPRESSION TYPE & RAIN-TIGHT

PRODUCT FEATURES

- ▶ Concrete-Tight

NOTE

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits
- ▶ Compression Cap color may vary



Cat. No. Compression	Cat. No. Rain-Tight	Trade Size	Std. Pkg.	Master Ctn.
OF611	OF611-W	1/2"	50	500
OF612	OF612-W	3/4"	25	250
OF613	OF613-W	1"	10	100
OF614	OF614-W	1-1/4"	10	100
OF615	OF615-W	1-1/2"	10	50
OF616	OF616-W	2"	5	50
OF617	OF617-W	2-1/2"	-	12
OF618	OF618-W	3"	-	12
OF619	OF619-W	3-1/2"	-	6
OF620	OF620-W	4"	-	6



Compression Type



Rain-Tight





STAMPED STEEL

1-HOLE EMT STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SE1-50	1/2"	100	1000
SE1-75	3/4"	100	1000
SE1-100	1"	100	500
SE1-125	1-1/4"	100	500
SE1-150	1-1/2"	50	500
SE1-200	2"	50	500
SU1-250	2-1/2"	25	100
SU1-300	3"	25	100
SU1-350	3-1/2"	25	100
SU1-400	4"	25	100



1/2" to 2"



2-1/2" to 4"

STAMPED STEEL

2-HOLE EMT STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SE2-50	1/2"	100	1000
SE2-75	3/4"	100	1000
SE2-100	1"	100	500
SE2-125	1-1/4"	100	500
SE2-150	1-1/2"	50	500
SE2-200	2"	50	500
SU2-250	2-1/2"	25	100
SU2-300	3"	25	100
SU2-350	3-1/2"	25	100
SU2-400	4"	25	100



1/2" to 2"



2-1/2" to 4"

STAMPED STEEL

NAIL STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Varies according to sizes

Cat. No.	EMT Size	Flex/Rigid Size	Std. Pkg.	Master Ctn.
NS-50	1/2"	3/8"	100	1000
NS-50/75	3/4"	1/2"	100	1000
NS-100	1"	3/4"	100	1000



STAMPED STEEL UNIVERSAL STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Listed for EMT, IMC and Rigid
- ST-50 to ST-200:**
- ▶ Break-apart design without Nut
- ▶ Improved Screw Hole Threads in 2024
- STN-50 to STN-200 & ST-250 to ST-400:**
- ▶ Two-piece design with Nut

Cat. No. With Nut	Cat. No. Without Nut	Trade Size	Std. Pkg.
STN-50	ST-50	1/2"	100
STN-75	ST-75	3/4"	100
STN-100	ST-100	1"	100
STN-125	ST-125	1-1/4"	100
STN-150	ST-150	1-1/2"	50
STN-200	ST-200	2"	50
ST-250		2-1/2"	50
ST-300		3"	25
ST-350		3-1/2"	25
ST-400		4"	25



STN-50 to STN-200
ST-250 to ST-400



ST-50 to ST-200

STAMPED STEEL SADDLE TYPE STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Tri-Combo Hex Screw Head
- ▶ Wide Saddle Design

Cat. No.	EMT/Rigid/FMC Conduit Size	Cable O.D. Range	Std. Pkg.
STS-50	5/16" - 1/2"	0.260" - 0.890"	100
STS-75	3/4"	0.670" - 1.090"	100
STS-100	1"	0.890" - 1.450"	100
STS-125	1-1/4"	1.150" - 1.700"	50
STS-150	1-1/2"	1.350" - 2.000"	50
STS-200	2"	1.875" - 2.570"	50
STS-250	2-1/2"	2.500" - 3.060"	25
STS-300	3"	3.000" - 3.600"	25
STS-350	3-1/2"	3.600" - 4.100"	25
STS-400	4"	4.100" - 4.700"	25



STAMPED STEEL CONDUIT HANGERS WITH BOLTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	EMT Size	Rigid Size	Std. Pkg.	Master Ctn.
PH-50B	#0B	1/2"	1/2" & 3/8"	50	500
PH-75B	#1B	3/4"	3/4"	50	500
PH-100B	#2B	1"	1"	25	250
PH-105B	#2-1/2B	1-1/4"	-	25	250
PH-125B	#3B	1-1/2"	1-1/4"	50	250
PH-150B	#4B	-	1-1/2"	50	250
PH-200B	#5B	2"	2"	20	100
PH-250B	#6B	2-1/2"	2-1/2"	10	50
PH-300B	#7B	3"	3"	10	50
PH-350B	#8B	3-1/2"	3-1/2"	10	50
PH-400B	#9B	4"	4"	5	25





STEEL EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Compression type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFC-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25	100
	AL AC: 12/4 (0.550") - 6/3 (0.920")			
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI: 10/4 (0.640") - 8/3 (0.920")			
SEFC-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25	100
	AL AC: 8/3(0.680") - 4/3 (1.075")			
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")			
	AL MCI: 6/4 (0.930") - 4/3 (1.075")			



STEEL EMT TO FLEX COUPLINGS SET-SCREW/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Set-Screw type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFSD-38	Steel AC: 14/2 (0.450") - 10/2 (0.660")	1/2"	25	100
	AL AC: 14/2(0.450") - 10/2 (0.660")			
	Steel MCI: 14/2 (0.450") - 10/2 (0.660")			
	AL MCI: 14/2 (0.450") - 10/2 (0.660")			
SEFSD-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25	100
	AL AC: 12/4 (0.550") - 6/3 (0.920")			
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI: 10/4 (0.640") - 8/3 (0.920")			
SEFSD-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25	100
	AL AC: 8/3(0.680") - 4/3 (1.075")			
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")			
	AL MCI: 6/4 (0.930") - 4/3 (1.075")			



ZINC DIE CAST EMT TO FLEX COUPLINGS SET-SCREW/SQUEEZE TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF530	1/2" to 3/8"	50	500
OF531	1/2" to 1/2"	25	250
OF532	3/4" to 3/4"	25	100
OF533	1" to 1"	10	40



ZINC DIE CAST
EMT TO FLEX COUPLINGS
SET-SCREW/CLAMP TYPE



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF520	1/2" to 3/8"	50	500
OF521	1/2" to 1/2"	25	250
OF522	3/4" to 3/4"	25	250
OF523	1" to 1"	10	40

ZINC DIE CAST
EMT TO FLEX COUPLINGS
COMPRESSION/SCREW-IN TYPE



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF1611	1/2"	50	500
OF1612	3/4"	25	250
OF1613	1"	10	100

ZINC DIE CAST
EMT OFFSET CONNECTORS
SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Concrete-Tight when taped
- ▶ Combo Head Set-Screw



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OCS-50	1/2"	100	1000
OCS-75	3/4"	50	500

ZINC DIE CAST
EMT OFFSET CONNECTORS
COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Concrete-Tight



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OCC-50	1/2"	100	1000
OCC-75	3/4"	50	500

ZINC DIE CAST
EMT 90° ANGLE CONNECTOR
COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Concrete-Tight



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CC90-50	1/2"	25	100

ZINC DIE CAST
EMT "FASTLOCK"
CONNECTORS
(NO LOCKNUT)

PRODUCT FEATURES

- ▶ Combo Head Set-Screw
- ▶ Suitable for dry location only



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF1701	1/2"	50	500
OF1702	3/4"	50	500

ZINC DIE CAST
EMT INSIDE CORNER
SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Combo Head Set-Screw



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
ECS-50	1/2"	100	1000
ECS-75	3/4"	50	500





**ZINC DIE CAST
EMT TO EMT PULL ELBOWS
SET-SCREW TYPE
WITH GASKET**

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPE-G50	1/2"	10	100
SSPE-G75	3/4"	5	50
SSPE-G100	1"	-	25
SSPE-G125	1-1/4"	-	20

**ZINC DIE CAST
EMT TO EMT PULL ELBOWS
SET-SCREW TYPE
WITHOUT GASKET**

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPE-50	1/2"	10	100
SSPE-75	3/4"	5	50
SSPE-100	1"	-	25
SSPE-125	1-1/4"	-	20

**ZINC DIE CAST
EMT TO BOX PULL ELBOWS
SET-SCREW TYPE
WITH GASKET**

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPEB-G50	1/2"	10	100
SSPEB-G75	3/4"	5	50
SSPEB-G100	1"	-	25
SSPEB-G125	1-1/4"	-	20

**ZINC DIE CAST
EMT TO BOX PULL ELBOWS
SET-SCREW TYPE
WITHOUT GASKET**

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*SSPEB-50	1/2"	10	100
*SSPEB-75	3/4"	5	50
*SSPEB-100	1"	-	25
*SSPEB-125	1-1/4"	-	20

PLASTIC EMT BUSHINGS

PRODUCT FEATURES

- ▶ Protects wires from damage by sharp edges of EMT
- ▶ Size 2-1/2" to 4" can also be used for Rigid, IMC and PVC conduit

NOTE

- ▶ Color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
TPB-50	1/2"	100	1000
TPB-75	3/4"	100	1000
TPB-100	1"	50	500
TPB-125	1-1/4"	25	250
TPB-150	1-1/2"	25	250
TPB-200	2"	10	100
TPB-250	2-1/2"	10	100
TPB-300	3"	-	20
TPB-350	3-1/2"	-	20
TPB-400	4"	-	10

**ZINC DIE CAST
FLEX CONNECTORS
SCREW-IN TYPE**

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF671	3/8"	100	1000
OF672	1/2"	100	1000
OF673	3/4"	100	500
OF674	1"	25	250
OF675	1-1/4"	10	100
OF681	1-1/2"	5	50
OF682	2"	3	30



**ZINC DIE CAST
INSULATED FLEX
CONNECTORS
SCREW-IN TYPE**

PRODUCT FEATURES

- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF671-S	3/8"	100	1000
OF672-S	1/2"	100	1000
OF673-S	3/4"	100	500
OF674-S	1"	25	250
OF675-S	1-1/4"	10	100
OF681-S	1-1/2"	5	50
OF682-S	2"	3	30



**ZINC DIE CAST
FLEX COUPLINGS
SCREW-IN TYPE**

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF676	1/2"	100	1000
OF677	3/4"	100	500
OF678	1"	25	250
OF679	1-1/4"	10	100
OF685	1-1/2"	5	50
OF686	2"	3	30



D12 | FLEX/AC/MC Fittings



STEEL FLEX BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Used to insulate cut Flex when the conduit is used for data cables without a junction box

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
FB-50	1/2"	100	1000
FB-75	3/4"	100	500
FB-100	1"	25	250



Shown Installed

ZINC DIE CAST FLEX CONNECTORS SQUEEZE TYPE

NOTE

- ▶ Sizes 3/8" & 1/2" are also for AC (BX)

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF730	3/8"	50	500
OF731	1/2"	25	250
OF732	3/4"	25	250
OF733	1"	10	100
OF734	1-1/4"	10	100
OF735	1-1/2"	5	50
OF736	2"	4	40
OF737	2-1/2"	2	6
OF738	3"	1	2
OF739	3-1/2"	1	2
OF740	4"	1	2



3/8" to 2"



2-1/2" to 4"

ZINC DIE CAST INSULATED FLEX CONNECTORS SQUEEZE TYPE

PRODUCT FEATURES

- ▶ With Insulated Throat

NOTE

- ▶ Sizes 3/8" & 1/2" are also for AC(BX)
- ▶ Insulated color may vary

Cat. No. Compression	Trade Size	Std. Pkg.	Master Ctn.
OF730-S	3/8"	50	500
OF731-S	1/2"	25	250
OF732-S	3/4"	25	250
OF733-S	1"	10	100
OF734-S	1-1/4"	10	100
OF735-S	1-1/2"	5	50
OF736-S	2"	4	40
OF737-S	2-1/2"	2	6
OF738-S	3"	1	2
OF739-S	3-1/2"	1	2
OF740-S	4"	1	2



3/8" to 2"



2-1/2" to 4"

STEEL
INSULATED FLEX CONNECTORS
DOUBLE-BITE SADDLE
CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, FMC
- ▶ Suitable for dry location only

NOTE

- ▶ Insulated color may vary

Cat. No.	Flex/Cable Range		KO Size	Std. Pkg.	Master Ctn.
SFID-38	Steel AC: 14/2 (0.450") - 10/2 (0.660")	Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")	1/2"	25	100
	AL AC: 14/2(0.450") - 10/2 (0.660")	AL HCF AC: 14/2 (0.450") - 10/2 (0.660")			
	Steel MCI: 14/2 (0.450") - 10/2 (0.660")	HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")			
	AL MCI: 14/2 (0.450") - 10/2 (0.660")	Steel/AL FMC/RWFMC/XRWFMC: 3/8"			
	AL MCI-A: 14/2 (0.400") - 10/3 (0.590")				
SFID-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25	100
	AL AC: 12/4 (0.550") - 6/3 (0.920")	AL HCF AC: 12/4 (0.550") - 6/3 (0.920")			
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")	HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")			
	AL MCI: 10/4 (0.640") - 8/3 (0.920")	Steel/AL FMC/RWFMC/XRWFMC: 1/2"			
	AL MCI-A: 12/4 (0.520") - 8/4 (0.770")				
SFID-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25	100
	AL AC: 8/3(0.680") - 4/3 (1.075")	AL HCF AC: 8/3 (0.680") - 4/3 (1.075")			
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")	HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")			
	AL MCI: 6/4 (0.930") - 4/3 (1.075")	Steel/AL FMC/RWFMC/XRWFMC: 3/4"			
	AL MCI-A: 8/4 (0.770") - 6/4 (1.110")				
SFID-100	Steel AC: 6/4 (0.930") - 1/3 (1.375")	Steel HCF AC: 6/4 (0.930") - 1/3 (1.375")	1"	10	40
	AL AC: 6/4(0.930") - 1/3 (1.375")	AL HCF AC: 6/4 (0.930") - 1/3 (1.375")			
	Steel MCI: 6/4 (0.960") - 3/4 (1.375")	HCF MCI-A: 0.880" - 1.110"			
	AL MCI: 6/4 (0.960") - 3/4 (1.375")	Steel/AL FMC/RWFMC/XRWFMC: 1"			
	AL MCI-A: 0.880" - 1.110"				



ZINC DIE CAST
FLEX CONNECTOR
CLAMP TYPE

PRODUCT FEATURES

- ▶ Combo Head Set-Screw

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*OF657	1/2"	25	50



ZINC DIE CAST
FLEX CONNECTORS
SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Steel screw
- ▶ For Steel FLEX only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF654	1/2"	100	500
OF655	3/4"	75	375



ZINC DIE CAST
90° ANGLE FLEX
CONNECTORS
SCREW-IN TYPE

PRODUCT FEATURES

- ▶ Sliding cover for easy wire pulls

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*OF9674	1"	10	100



D14 | FLEX/AC/MC Fittings



ZINC DIE CAST 90° ANGLE AC (BX) MC/FLEX CONNECTORS SQUEEZE TYPE

PRODUCT FEATURES

- ▶ Suitable for dry location only
- ▶ For AC, MCI-A, FMC/RWFMC

Cat. No.	Flex/Cable Range	KO Size	Std. Pkg.	Master Ctn.
OF643	Steel AC: 14/2 (0.453") - 8/2 (0.647")	1/2"	25	250
	AL AC: 14/2 (0.453") - 10/4 (0.622")			
	Steel MCI-A: 14/2 (0.453") - 8/2 (0.669")			
OF644	Steel AC: 10/4 (0.648") - 8/3 (0.826")	1/2"	25	250
	AL AC: 10/4 (0.622") - 6/4 (0.905")			
	Steel MCI-A: 10/4 (0.622") - 6/3 (0.866")			
OF645	Steel AC: 6/4 (0.945") - 3/4 (1.185")	3/4"	25	250
	AL AC: 6/4 (0.925") - 2/4 (1.133")			
	Steel MCI-A: 8/4 (0.827") - 3/4 (1.185")			



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF6463	1"	5	25
OF6464	1-1/4"	-	5
OF6465	1-1/2"	-	5
OF6466	2"	-	5
OF6467	2-1/2"	-	5
OF6468	3"	-	5
OF6469	3-1/2"	-	1
OF6470	4"	-	1



1" to 2"



2-1/2" to 4"

ZINC DIE CAST 90° ANGLE FLEX CONNECTORS SQUEEZE TYPE

STEEL EMT TO FLEX COUPLINGS SET-SCREW/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Set-Screw type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFSD-38	Steel AC: 14/2 (0.450") - 10/2 (0.660")	1/2"	25	100
	AL AC: 14/2(0.450") - 10/2 (0.660")			
	Steel MCI: 14/2 (0.450") - 10/2 (0.660")			
	AL MCI: 14/2 (0.450") - 10/2 (0.660")			
	AL MCI-A: 14/2 (0.400") - 10/3 (0.590")			
SEFSD-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25	100
	AL AC: 12/4 (0.550") - 6/3 (0.920")			
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI-A: 12/4 (0.520") - 8/4 (0.770")			
SEFSD-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25	100
	AL AC: 8/3(0.680") - 4/3 (1.075")			
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")			
	AL MCI: 6/4 (0.930") - 4/3 (1.075")			
	AL MCI-A: 8/4 (0.770") - 6/4 (1.110")			



STEEL EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Compression type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, FMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFCD-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25	100
	AL AC: 12/4 (0.550") - 6/3 (0.920")			
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI: 10/4 (0.640") - 8/3 (0.920")			
	AL MCI-A: 12/4 (0.520") - 8/4 (0.770")			
SEFCD-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25	100
	AL AC: 8/3(0.680") - 4/3 (1.075")			
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")			
	AL MCI: 6/4 (0.930") - 4/3 (1.075")			
	AL MCI-A: 8/4 (0.770") - 6/4 (1.110")			



ZINC DIE CAST EMT TO FLEX COUPLINGS SET-SCREW/SQUEEZE TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF530	1/2" to 3/8"	50	500
OF531	1/2" to 1/2"	25	250
OF532	3/4" to 3/4"	25	100
OF533	1" to 1"	10	40



ZINC DIE CAST EMT TO FLEX COUPLINGS SET-SCREW/CLAMP TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF520	1/2" to 3/8"	50	500
OF521	1/2" to 1/2"	25	250
OF522	3/4" to 3/4"	25	250
OF523	1" to 1"	10	40



ZINC DIE CAST EMT TO FLEX COUPLINGS COMPRESSION/SCREW-IN TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF1611	1/2"	50	500
OF1612	3/4"	25	250
OF1613	1"	10	100



D16 | FLEX/AC/MC Fittings



ZINC DIE CAST RIGID TO FLEX COUPLING CLAMP TYPE

PRODUCT FEATURES

- ▶ For Steel FLEX Only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF697	1/2"	25	250



ZINC DIE CAST RIGID TO FLEX COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ For Steel FLEX Only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF694	1/2"	25	250
OF695	3/4"	25	250



ZINC DIE CAST INSULATED DOUBLE-SNAP CABLE CONNECTOR

PRODUCT FEATURES

- ▶ 105°C rated throat insulator
- ▶ Fast and Tool-free installation
- ▶ Removable and Reusable
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Dry location

Cat. No.	Description	KO Size	Std. Pkg.
DSC-38	DOUBLE-SNAP CABLE CONNECTOR WITH INSULATOR Steel/AL AC: 14/2 (0.40") - 10/3 (0.618") Steel MCI: 0.395" - 0.638" AL MCI: 0.40" - 0.618" Steel/AL MCI-A: 14/2 (0.395") - 10/3 (0.638") Steel/AL HCF MCI-A: 14/2 (0.395") - 10/3 (0.638") AL RWFMC: 3/8"	1/2"	50



ZINC DIE CAST INSULATED CUT-IN DOUBLE-SNAP CABLE CONNECTOR

PRODUCT FEATURES

- ▶ 105°C rated throat insulator
- ▶ Fast and Tool-free installation
- ▶ Removable and Reusable
- ▶ For FMC, AC, MCI, MCI-A, HCF
- ▶ Dry location

Cat. No.	Description	KO Size	Std. Pkg.
DSC-38C	CUT-IN DOUBLE-SNAP CABLE CONNECTOR WITH INSULATOR, FOR OLD WORK Steel/AL AC: 14/2 (0.40") - 10/3 (0.618") Steel/AL MCI: 14/2 (0.395") - 10/3 (0.638") Steel/AL MCI-A: 14/2 (0.395") - 10/3 (0.638") Steel/AL HCF MCI-A: 14/2 (0.395") - 10/3 (0.638") Steel/AL FMC: 3/8"	1/2"	50



STEEL "FASTLOCK" CONNECTOR

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Saddle-Base Connector
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

NOTE

- ▶ Insulated color may vary

Cat. No.	Description	K.O. Size	Std. Pkg.	Master Ctn.
FLC-50	Steel AC 14/2 (0.475") - 10/3 (0.565") AL AC 14/2 (0.464") - 10/3 (0.610") Steel MCI: 14/2 (0.455") - 10/3 (0.565") AL MCI: 14/2 (0.455") - 10/3 (0.600") Steel HCF AC: 14/2 (0.475") - 10/3 (0.565") AL HCF AC: 14/2 (0.464") - 10/3 (0.610") AL MCI-A: 14/2 (0.385") - 10/3 (0.510") HCF MCI-A: 14/2 (0.385") - 10/3 (0.510") Steel/AL FMC/RWFMC: 3/8"	1/2"	50	500



STEEL "FASTLOCK" WIDE-THROAT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Saddle-Base Connector
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

NOTE

- ▶ Insulated color may vary

Cat. No.	Description	K.O. Size	Std. Pkg.	Master Ctn.
FLC-50L	Steel AC 10/4 (0.605") - 6/3 (0.853") AL AC 10/3 (0.610") - 6/3 (0.823") Steel MCI: 10/3 (0.580") - 8/3 (0.690") AL MCI: 10/3 (0.520") - 8/3 (0.690") Steel HCF AC: 10/4 (0.605") - 6/3 (0.853") AL HCF AC: 10/3 (0.610") - 6/3 (0.823") AL MCI-A: 8/3 (0.675") HCF MCI-A: 8/3 (0.675") Steel/AL FMC/RWFMC: 1/2"	1/2"	50	500
FLC-75L	Steel AC 10/3 (0.545") - 6/3 (0.850") AL AC 10/3 (0.600") - 6/3 (0.835") Steel MCI: 10/3 (0.550") - 6/3 (0.850") AL MCI: 10/3 (0.580") - 6/3 (0.850") Steel HCF AC: 10/3 (0.545") - 6/3 (0.850") AL HCF AC: 10/3 (0.600") - 6/3 (0.835") AL MCI-A: 8/3 (0.675") - 6/3 (0.785") HCF MCI-A: 8/3 (0.675") - 6/3 (0.785") Steel/AL FMC/RWFMC: 1/2"	3/4"	25	250



STEEL "FASTLOCK" DUPLEX CONNECTOR

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

NOTE

- ▶ Insulated color may vary

Cat. No.	Description	K.O. Size	Std. Pkg.	Master Ctn.
FLD-50	Steel AC 14/2 (0.475") - 10/3 (0.565") AL AC 14/2 (0.464") - 12/4 (0.600") Steel MCI: 14/2 (0.455") - 12/4 (0.545") AL MCI: 14/2 (0.455") - 12/4 (0.550") Steel HCF AC: 14/2 (0.475") - 10/3 (0.565") AL HCF AC: 14/2 (0.464") - 12/4 (0.600") AL MCI-A: 14/2 (0.385") - 10/3 (0.520") HCF MCI-A: 14/2 (0.385") - 10/3 (0.520") Steel/AL FMC/RWFMC: 3/8"	1/2"	25	250





**ZINC DIE CAST
METAL CLAD (MC)
CONNECTORS SADDLE-TYPE**

PRODUCT FEATURES

- ▶ Combo Head Set-Screw
- ▶ With Insulated Throat
- ▶ Suitable for Dry Location Only
- ▶ For AC, MCI-A, NM Cable, FMC/RWFMC

NOTE

- ▶ Insulated color may vary



Cat. No.	Description	KO Size	Std. Pkg.	Master Ctn.
OF6231	Steel AC: 14/2 (0.457") - 12/4 (0.539") Aluminum AC: 14/2 (0.464") - 10/4 (0.622") Steel MCI-A: 14/2 (0.453") - 10/4 (0.614") Aluminum MCI-A: 14/2 (0.433") - 10/3 (0.630") NM Cable: 12/3, 14/2 & 8/2 with ground. 12/2 without ground Steel/AL FMC/RWFMC: 3/8"	1/2"	100	500
OF6232	Steel Interlocking: 0.661 - 0.711 Dia. AL Interlocking: 0.775 - 0.825 Dia. Steel/AL AC: 0.650 - 0.810 Dia. Steel FMC: 1/2"	3/4"	50	250

**ZINC DIE CAST
METAL CLAD (MC) & AC (BX)
CONNECTOR SET-SCREW TYPE**

PRODUCT FEATURES

- ▶ For AC, MCI-A, FMC/RWFMC



Cat. No.	Description	KO Size	Std. Pkg.	Master Ctn.
OF653	Steel AC: 14/2 (0.453") - 10/4 (0.622") Aluminum AC: 14/2 (0.464") - 14/4 (0.535") Steel MCI-A: 14/2 (0.453") - 10/2 (0.581") Aluminum MCI-A: 14/2 (0.437") - 10/2 (0.535") Steel/AL FMC/RWFMC: 3/8"	1/2"	100	500

**ZINC DIE CAST
METAL CLAD (MC) & AC (BX)
CONNECTOR**

PRODUCT FEATURES

- ▶ For AC, MCI-A, NM Cable, FMC/RWFMC



Cat. No.	Description	KO Size	Std. Pkg.	Master Ctn.
OF6620	Steel AC: 14/2 (0.457") - 12/4 (0.539") Aluminum AC: 14/2 (0.464") - 14/4 (0.534") Steel MCI-A: 14/2 (0.453") - 10/2 (0.531") Aluminum MCI-A: 14/2 (0.433") - 14/4 (0.539") NM Cable: 12/3, 14/2 with ground & 12/2 without ground Steel/AL FMC/RWFMC: 3/8"	1/2"	100	500

**ZINC DIE CAST
METAL CLAD (MC)
CONNECTORS
CLAMP TYPE**

PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Suitable for Dry Location Only

NOTE

- ▶ Insulated color may vary



Cat. No.	Cable Size Dia.	Trade Size	Std. Pkg.	Master Ctn.
*MC-CL-300	2.30" - 2.68"	3"	-	5
*MC-CL-350	2.85" - 3.42"	3-1/2"	-	5

**ZINC DIE CAST
COMBINATION AC (BX) &
NON-METALLIC (NM)
CONNECTOR**

PRODUCT FEATURES

- ▶ Suitable for Dry Location Only
- ▶ For AC, NM Cable, FMC/RWFMC, Cord



Cat. No.	Description	KO Size	Std. Pkg.	Master Ctn.
OF623	Steel/AL AC: 14/2 Steel/AL FMC/RWFMC: 3/8" NM Cable: 14/2 Cord: 0.340" - 0.380" Dia Cord 14/3 SJO, 16/3 SJO, 16/2 SO	1/2"	25	250

Electrical Fittings

ZINC DIE CAST DUPLEX AC (BX) FLEX/MC CONNECTOR

PRODUCT FEATURES

- ▶ Suitable for Dry Location Only
- ▶ For AC, MCI-A, NM Cable, FMC/RWFMC



Cat. No.	Description	KO Size	Std. Pkg.	Master Ctn.
MC-DX-50	Steel AC: 14/2 (0.457") - 12/4 (0.539")	1/2"	25	250
	Aluminum AC: 14/2 (0.464") - 10/4 (0.622")			
	Steel MCI-A: 14/2 (0.453") - 10/4 (0.614")			
	Aluminum MCI-A: 14/2 (0.433") - 10/3 (0.630")			
	NM Cable: 12/3, 14/2 with ground 12/2 without ground			
	Steel/AL FMC/RWFMC: 3/8"			

STAMPED STEEL 1-HOLE MC(BX) CABLE STRAP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-resistant



Cat. No.	Description	Std. Pkg.	Master Ctn.
S1-38	12-2, 12-3, 10-2, 10-3 MC (BX) 1-Hole Strap	100	1000

STAMPED STEEL SADDLE TYPE STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Tri-Combo Hex Screw Head
- ▶ Wide Saddle Design



Cat. No.	EMT/Rigid/FMC Conduit Size	Cable O.D. Range	Std. Pkg.
STS-50	5/16" - 1/2"	0.260" - 0.890"	100
STS-75	3/4"	0.670" - 1.090"	100
STS-100	1"	0.890" - 1.450"	100
STS-125	1-1/4"	1.150" - 1.700"	50
STS-150	1-1/2"	1.350" - 2.000"	50
STS-200	2"	1.875" - 2.570"	50
STS-250	2-1/2"	2.500" - 3.060"	25
STS-300	3"	3.000" - 3.600"	25
STS-350	3-1/2"	3.600" - 4.100"	25
STS-400	4"	4.100" - 4.700"	25

STAMPED STEEL NAIL STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Varies according to sizes



Cat. No.	EMT Size	Flex/Rigid Size	Std. Pkg.	Master Ctn.
NS-50	1/2"	3/8"	100	1000
NS-50/75	3/4"	1/2"	100	1000
NS-100	1"	3/4"	100	1000

ANTI-SHORT BUSHINGS THERMOPLASTIC

PRODUCT FEATURES

- ▶ High-Temperature Plastic
- ▶ Fits BX (AC) and Flex Conduits



Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
ASB-516	14/2, 14/3, 12/2	5/16"	35	3500
ASB-38	14/4, 12/3, 6/1, 4/1	3/8"	35	2100
ASB-716	12/4, 10/2, 10/3, 2/1	7/16"	35	700
ASB-50	10/4, 8/2, 8/3, 1/1	1/2"	20	400
ASB-75	8/4, 6/2, 4/2, 4/3, 6/4	3/4"	16	320



D20 | Liquid Tight Fittings



STEEL LIQUID TIGHT SEALING RINGS

PRODUCT FEATURES

- ▶ Neoprene Rubber Gasket
- ▶ Steel Retainer
- ▶ Form Liquid tight seal between connector and box



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LTSR-50	1/2"	250	2500
LTSR-75	3/4"	200	2000
LTSR-100	1"	150	1500
LTSR-125	1-1/4"	100	1000
LTSR-150	1-1/2"	50	500
LTSR-200	2"	50	500
LTSR-250	2-1/2"	-	100
LTSR-300	3"	-	100
LTSR-350	3-1/2"	-	50
LTSR-400	4"	-	50



NON-METALLIC (PVC) STRAIGHT LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ PVC Type-B
- ▶ Corrosion-Resistant
- ▶ Zinc or Steel Locknut



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
NMLT-38	3/8"	25	100
NMLT-50	1/2"	25	250
NMLT-75	3/4"	15	150
NMLT-100	1"	8	80
NMLT-125	1-1/4"	5	50
NMLT-150	1-1/2"	4	40
NMLT-200	2"	1	36



NON-METALLIC (PVC) 90° ANGLE LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ PVC Type-B
- ▶ Corrosion-Resistant
- ▶ Zinc or Steel Locknut



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
NMLT90-38	3/8"	10	100
NMLT90-50	1/2"	15	150
NMLT90-75	3/4"	10	100
NMLT90-100	1"	5	50
NMLT90-125	1-1/4"	4	40
NMLT90-150	1-1/2"	2	20
NMLT90-200	2"	1	10



STEEL EMT TO LIQUID TIGHT COMBINATION COUPLINGS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight
- ▶ Rain-Tight



Cat. No.	EMT Size	LT Size	Std. Pkg.	Master Ctn.
SELTC-50	1/2"	1/2"	25	250
SELTC-75	3/4"	3/4"	10	100
SELTC-100	1"	1"	10	100



3/4"

1"

STEEL RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	RIGID Size	LT Size	Std. Pkg.	Master Ctn.
SRLTC-50	1/2"	1/2"	25	100
SRLTC-75	3/4"	3/4"	10	40
SRLTC-100	1"	1"	10	40
SRLTC-125	1-1/4"	1-1/4"	5	20
SRLTC-150	1-1/2"	1-1/2"	-	15
SRLTC-200	2"	2"	-	10



ZINC DIE CAST STRAIGHT LIQUID TIGHT CONNECTORS



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LT-38	3/8"	25	250
LT-50	1/2"	25	250
LT-75	3/4"	15	150
LT-100	1"	8	80
LT-125	1-1/4"	5	50
LT-150	1-1/2"	4	40
LT-200	2"	1	10
LT-250	2-1/2"	1	10
LT-300	3"	1	10
LT-350	3-1/2"	1	6
LT-400	4"	1	6



ZINC DIE CAST INSULATED STRAIGHT LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LTI-38	3/8"	25	250
LTI-50	1/2"	25	250
LTI-75	3/4"	15	150
LTI-100	1"	8	80
LTI-125	1-1/4"	5	50
LTI-150	1-1/2"	4	40
LTI-200	2"	1	36
LTI-250	2-1/2"	1	10
LTI-300	3"	1	10
LTI-350	3-1/2"	1	6
LTI-400	4"	1	6



D22 | Liquid Tight Fittings



MALLEABLE IRON STRAIGHT LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLT-38	3/8"	25	250
MLT-50	1/2"	25	250
MLT-75	3/4"	15	150
MLT-100	1"	8	80
MLT-125	1-1/4"	5	50
MLT-150	1-1/2"	4	40
MLT-200	2"	1	20
MLT-250	2-1/2"	-	1
MLT-300	3"	-	1
MLT-350	3-1/2"	-	1
MLT-400	4"	-	1



MALLEABLE IRON INSULATED STRAIGHT LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLTI-38	3/8"	25	250
MLTI-50	1/2"	25	250
MLTI-75	3/4"	15	150
MLTI-100	1"	8	80
MLTI-125	1-1/4"	5	50
MLTI-150	1-1/2"	4	40
MLTI-200	2"	1	20
MLTI-250	2-1/2"	-	1
MLTI-300	3"	-	1
MLTI-350	3-1/2"	-	1
MLTI-400	4"	-	1



MALLEABLE IRON INSULATED STRAIGHT LIQUID TIGHT CONNECTORS WITH ALUMINUM LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 105°C rated insulated throat
- ▶ Sealing washer included
- ▶ Aluminum lay-in lug provides easy installation of a ground wire

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MLTILL-38	3/8"	#14 - #4	25	250
MLTILL-50	1/2"	#14 - #4	25	250
MLTILL-75	3/4"	#14 - #4	10	100
MLTILL-100	1"	#14 - #4	5	50
MLTILL-125	1-1/4"	#14 - #4	5	50
MLTILL-150	1-1/2"	#14 - #4	4	40
MLTILL-200	2"	#14 - #4	2	20
MLTILL-250	2-1/2"	#14 - #1/0	1	10
MLTILL-300	3"	#14 - #1/0	1	10
MLTILL-350	3-1/2"	#6 - #250MCM	-	1
MLTILL-400	4"	#6 - #250MCM	-	1



3/4"

1-1/4"

MALLEABLE IRON 45° ANGLE LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLT45-38	3/8"	25	150
MLT45-50	1/2"	25	150
MLT45-75	3/4"	10	100
MLT45-100	1"	5	50
MLT45-125	1-1/4"	5	40
MLT45-150	1-1/2"	4	20
MLT45-200	2"	1	15
MLT45-250	2-1/2"	-	1
MLT45-300	3"	-	1
MLT45-350	3-1/2"	-	1
MLT45-400	4"	-	1



MALLEABLE IRON INSULATED 45° ANGLE LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLTI45-38	3/8"	25	150
MLTI45-50	1/2"	25	150
MLTI45-75	3/4"	10	100
MLTI45-100	1"	5	50
MLTI45-125	1-1/4"	5	40
MLTI45-150	1-1/2"	4	20
MLTI45-200	2"	1	15
MLTI45-250	2-1/2"	-	1
MLTI45-300	3"	-	1
MLTI45-350	3-1/2"	-	1
MLTI45-400	4"	-	1



MALLEABLE IRON INSULATED 45° ANGLE LIQUID TIGHT CONNECTORS WITH ALUMINUM LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 105°C rated insulated throat
- ▶ Sealing washer included
- ▶ Aluminum lay-in lug provides easy installation of a ground wire

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MLTI45LL-38	3/8"	#14 - #4	10	100
MLTI45LL-50	1/2"	#14 - #4	10	100
MLTI45LL-75	3/4"	#14 - #4	10	100
MLTI45LL-100	1"	#14 - #4	5	50
MLTI45LL-125	1-1/4"	#14 - #4	-	5
MLTI45LL-150	1-1/2"	#14 - #4	-	5
MLTI45LL-200	2"	#14 - #4	-	5
MLTI45LL-250	2-1/2"	#14 - #1/0	-	1
MLTI45LL-300	3"	#14 - #1/0	-	1
MLTI45LL-350	3-1/2"	#6 - #250MCM	-	1
MLTI45LL-400	4"	#6 - #250MCM	-	1



3/4"

1-1/4"



D24 | Liquid Tight Fittings



ZINC DIE CAST 90° ANGLE LIQUID TIGHT CONNECTORS



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LT90-38	3/8"	15	150
LT90-50	1/2"	15	150
LT90-75	3/4"	10	100
LT90-100	1"	5	50
LT90-125	1-1/4"	4	40
LT90-150	1-1/2"	2	20
LT90-200	2"	1	10
LT90-250	2-1/2"	1	10
LT90-300	3"	1	4
LT90-400	4"	1	3



ZINC DIE CAST INSULATED 90° ANGLE LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LTI90-38	3/8"	15	150
LTI90-50	1/2"	15	150
LTI90-75	3/4"	10	100
LTI90-100	1"	5	50
LTI90-125	1-1/4"	4	40
LTI90-150	1-1/2"	2	20
LTI90-200	2"	1	10
LTI90-250	2-1/2"	1	10
LTI90-300	3"	1	4
LTI90-350	3-1/2"	1	3
LTI90-400	4"	1	3



MALLEABLE IRON 90° ANGLE LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLT90-38	3/8"	25	150
MLT90-50	1/2"	25	150
MLT90-75	3/4"	10	100
MLT90-100	1"	5	50
MLT90-125	1-1/4"	5	40
MLT90-150	1-1/2"	4	20
MLT90-200	2"	1	15
MLT90-250	2-1/2"	-	1
MLT90-300	3"	-	1
MLT90-350	3-1/2"	-	1
MLT90-400	4"	-	1



MALLEABLE IRON
INSULATED 90° ANGLE
LIQUID TIGHT CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ With Insulated Throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MLTI90-38	3/8"	25	150
MLTI90-50	1/2"	25	150
MLTI90-75	3/4"	10	100
MLTI90-100	1"	5	50
MLTI90-125	1-1/4"	5	40
MLTI90-150	1-1/2"	4	20
MLTI90-200	2"	1	15
MLTI90-250	2-1/2"	-	1
MLTI90-300	3"	-	1
MLTI90-350	3-1/2"	-	1
MLTI90-400	4"	-	1



MALLEABLE IRON
INSULATED 90° ANGLE
LIQUID TIGHT CONNECTORS
WITH ALUMINUM LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 105°C rated insulated throat
- ▶ Sealing washer included
- ▶ Aluminum lay-in lug provides easy installation of a ground wire

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MLTI90LL-38	3/8"	#14 - #4	10	100
MLTI90LL-50	1/2"	#14 - #4	10	100
MLTI90LL-75	3/4"	#14 - #4	10	100
MLTI90LL-100	1"	#14 - #4	5	50
MLTI90LL-125	1-1/4"	#14 - #4	-	5
MLTI90LL-150	1-1/2"	#14 - #4	-	5
MLTI90LL-200	2"	#14 - #4	-	5
MLTI90LL-250	2-1/2"	#14 - #1/0	-	1
MLTI90LL-300	3"	#14 - #1/0	-	1
MLTI90LL-350	3-1/2"	#6 - #250MCM	-	1
MLTI90LL-400	4"	#6 - #250MCM	-	1



3/4"

1-1/4"



D26 | NM Cable Fittings

NON-METALLIC CABLE CONNECTORS PUSH-IN TYPE

PRODUCT FEATURES

- ▶ Flame-retardant Polypropylene
- ▶ Special gripping arrangement for easy cable insertion

Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
NMP-50	One 10, 12, 14 AWG two-conductor cables with or without ground wire	1/2"	100	300



PLASTIC NON-METALLIC CABLE QUICK-LOCK CONNECTORS

PRODUCT FEATURES

- ▶ Easy and fast installation
- ▶ Simply remove with screwdriver if necessary

Cat. No.	NM Cable Range	Trade Size	KO Size	Std. Pkg.	Master Ctn.
PQLC-38	14/2 - 10/3	3/8"	1/2"	100	1000
PQLC-75	14/3 - 6/3	3/4"	3/4"	50	500



PQLC-38



PQLC-75

PLASTIC UNIVERSAL METAL STUD GROMMET

PRODUCT FEATURES


- ▶ High Strength, non-conductive polypropylene
- ▶ Universal design fits into a standard 1" trade size hole and all factory-punched stud holes
- ▶ Lightweight material eases installation

Cat. No.	Description	Std. Pkg.
PUSG	Universal Snap-in Type Bushings for metal stud, fit all factory punched metal stud holes	100




INSTALLATION INSTRUCTION:

- Step1:** Separate the two halves
- Step2:** Snap the bushing end and the washer end together through the hole
- Step3:** Install cable through the grommet



COMMON HOLE SHAPES IN METAL STUDS:

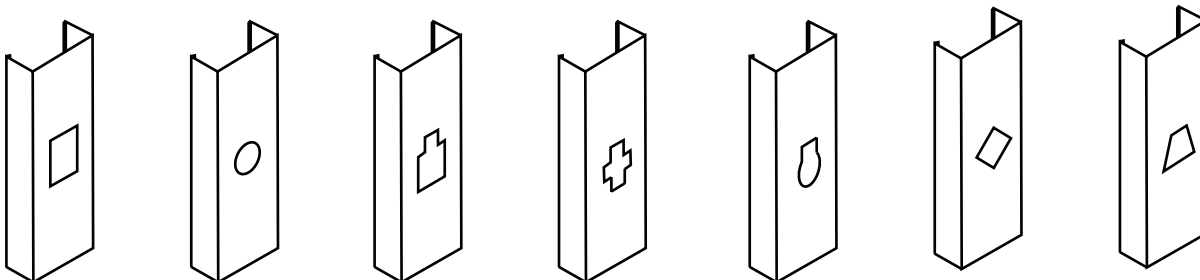

ZINC DIE CAST COMBINATION AC (BX) & NON-METALLIC (NM) CONNECTORS

PRODUCT FEATURES

- ▶ Suitable for dry location only
- ▶ For AC, NM Cable, FMC/RWFMC, Cord

ZINC DIE CAST NON-METALLIC CABLE CONNECTORS

NOTE

- ▶ Sizes 1" to 2" are also suitable for service entrance

Cat. No.	FLEX/Cable Range	KO Size	Std. Pkg.	Master Ctn.
OF623	Steel/AL AC: 14/2 Steel/AL FMC/RWFMC: 3/8" NM Cable: 14/2 Cord: 0.340" - 0.380" Dia Cord 14/3 SJO, 16/3 SJO, 16/2 SO	1/2"	25	250



Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
RX-50	(1) 14/2 to 10/2 NM, (2) 14/2 or (2) 12/2 NM, 0.340" to 0.380" Dia. Flex Cord (Dry Location) 14/3, 16/2, and 16/3 SJO	1/2"	100	1000
RX-75	(2) 14-2 NM, AWG, 0.340" to 0.515" Dia. Flex Cord (Dry Location) 14/3, 14/2 SJO	3/4"	25	250

For Service Entrance

RX-100	(4) 14/2, (1) 8/3, 8/2, 6/2, 6/3, 4/2, 4/3 NM (1) 2 SE Cable	1"	10	100
RX-125	4/3 or 2/3 NM	1-1/4"	5	50
RX-150	3-2/0 or 3-4/0 NM	1-1/2"	5	50
RX-200	3-2/0 or 3-4/0 NM	2"	5	50



ZINC DIE CAST WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

PRODUCT FEATURES

- ▶ Watertight



Cat. No.	Trade Size	Wire Size	Grommet Opening	Std. Pkg.	Master Ctn.
WECC-100-8	1"	#8	0.40" - 0.68"	10	100
WECC-100-6	1"	#6	0.44" - 0.70"	10	100
WECC-100-4	1"	#4	0.52" - 0.84"	10	100
WECC-125-3	1-1/4"	#3	0.56" - 0.92"	10	50
WECC-125-2	1-1/4"	#2	0.60" - 1.00"	10	50
WECC-125-1	1-1/4"	#1	0.65" - 1.09"	10	50
WECC-150-10	1-1/2"	#1/0	0.72" - 1.24"	5	50
WECC-150-20	1-1/2"	#2/0	0.86" - 1.34"	5	50
WECC-150-30	1-1/2"	#3/0	0.87" - 1.37"	5	50
WECC-200-10	2"	#1/0	0.72" - 1.24"	5	25
WECC-200-20	2"	#2/0	0.86" - 1.34"	5	25
WECC-200-30	2"	#3/0	0.87" - 1.34"	5	25
WECC-200-40	2"	#4/0	0.90" - 1.50"	5	25
WECC-200-40N	2"	#4/0	1.11" - 1.73"	5	25



D28 | NM Cable Fittings



STAMPED STEEL 1-HOLE RG6U CABLE STRAP

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Description	Std. Pkg.	Master Ctn.
S1-25	RG6U (Coaxial Cable) 1-Hole Strap	100	1000



STAMPED STEEL 1-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-Resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES1-50	Three #8, #6, #4	100	500
SES1-75	Three #3, #2	100	500
SES1-100	Three #1, #1/0, #2/0	50	250
SES1-200	Three #3/0, #4/0	25	250



STAMPED STEEL 2-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-Resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES2-50	Three #8, #6, #4	20	100
SES2-75	Three #3, #2	20	100
SES2-100	Three #1, #1/0, #2/0	20	100
SES2-200	Three #3/0, #4/0	20	100



PRE-GALVANIZED STEEL STUD MOUNTING CABLE SUPPORT

PRODUCT FEATURES

- ▶ Wood or Metal Stud
- ▶ Easy to Lock
- ▶ Space saving packaging

Cat. No.	Description	Non-Metallic	MC/AC/BX	Std. Pkg.
CS-CJ6	Stud Mounting Cable Support with locking tab	Max. 6	Max. 4	100



ZINC DIE CAST STRAIN RELIEF CORD-GRIP CONNECTORS

PRODUCT FEATURES

- ▶ Watertight



Cat. No.	Trade Size	Clamping Range	Std. Pkg.	Master Ctn.
CG-50-190/260	1/2"	0.190" - 0.260"	25	100
CG-50-260/375	1/2"	0.260" - 0.375"	25	100
CG-50-375/500	1/2"	0.375" - 0.500"	25	100
CG-75-375/500	3/4"	0.375" - 0.500"	10	50
CG-75-500/625	3/4"	0.500" - 0.625"	10	50
CG-75-625/750	3/4"	0.625" - 0.750"	10	50
CG-100-375/500	1"	0.375" - 0.500"	10	50
CG-100-500/625	1"	0.500" - 0.625"	10	50
CG-100-625/750	1"	0.625" - 0.750"	10	50
CG-100-750/880	1"	0.750" - 0.880"	10	50
CG-100-880/985	1"	0.880" - 0.985"	10	50



STEEL STRAIN RELIEF CORD-GRIP CONNECTORS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Watertight
- ▶ Connect S, SO, ST, SJ, SJO, SJT Cord to metal box or enclosure
- ▶ Color-coded bushings identify different cord ranges



Cat. No.	Trade Size	Color	Clamping Range	Std. Pkg.	Master Ctn.
SCG-50-125/250	1/2"	Red	0.125" - 0.250"	25	100
SCG-50-250/350	1/2"	White	0.250" - 0.350"	20	100
SCG-50-350/450	1/2"	Blue	0.350" - 0.450"	20	100
SCG-50-450/560	1/2"	Green	0.450" - 0.560"	20	100
SCG-50-560/650	1/2"	Beige	0.560" - 0.650"	20	100
SCG-75-125/250	3/4"	Red	0.125" - 0.250"	10	50
SCG-75-250/350	3/4"	White	0.250" - 0.350"	10	50
SCG-75-350/450	3/4"	Blue	0.350" - 0.450"	10	50
SCG-75-450/560	3/4"	Green	0.450" - 0.560"	10	50
SCG-75-560/650	3/4"	Beige	0.560" - 0.650"	10	50
SCG-75-650/750	3/4"	Yellow	0.650" - 0.750"	10	50
SCG-75-750/850	3/4"	Purple	0.750" - 0.850"	10	50
SCG-100-450/560	1"	Green	0.450" - 0.560"	5	25
SCG-100-560/650	1"	Beige	0.560" - 0.650"	5	25
SCG-100-650/750	1"	Yellow	0.650" - 0.750"	5	25
SCG-100-750/850	1"	Purple	0.750" - 0.850"	5	25
SCG-100-850/950	1"	Gray	0.850" - 0.950"	5	25
SCG-100-950/1050	1"	Black	0.950" - 1.050"	5	25



D30 | Cord Grip Fittings



NYLON STRAIN RELIEF CORD-GRIP CONNECTORS

PRODUCT FEATURES

- ▶ Watertight

NOTE

- ▶ Lock Nut not included



Cat. No.	Trade Size	Cord Range	Std. Pkg.	Master Ctn.
NGC-38-197/394	3/8"	0.197" - 0.394"	25	100
NGC-50-384/551	1/2"	0.394" - 0.551"	25	100
NGC-75-551/709	3/4"	0.551" - 0.709"	10	50
NGC100-709/984	1"	0.709" - 0.984"	10	25



Electrical Fittings

ZINC DIE CAST WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

PRODUCT FEATURES

- ▶ Watertight



Cat. No.	Trade Size	Wire Size	Grommet Opening	Std. Pkg.	Master Ctn.
WECC-100-8	1"	#8	0.40" - 0.68"	10	100
WECC-100-6	1"	#6	0.44" - 0.70"	10	100
WECC-100-4	1"	#4	0.52" - 0.84"	10	100
WECC-125-3	1-1/4"	#3	0.56" - 0.92"	10	50
WECC-125-2	1-1/4"	#2	0.60" - 1.00"	10	50
WECC-125-1	1-1/4"	#1	0.65" - 1.09"	10	50
WECC-150-10	1-1/2"	#1/0	0.72" - 1.24"	5	50
WECC-150-20	1-1/2"	#2/0	0.86" - 1.34"	5	50
WECC-150-30	1-1/2"	#3/0	0.87" - 1.37"	5	50
WECC-200-10	2"	#1/0	0.72" - 1.24"	5	25
WECC-200-20	2"	#2/0	0.86" - 1.34"	5	25
WECC-200-30	2"	#3/0	0.87" - 1.34"	5	25
WECC-200-40	2"	#4/0	0.90" - 1.50"	5	25
WECC-200-40N	2"	#4/0	1.11" - 1.73"	5	25



STEEL RIGID CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ For use in dry location

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*RS-50	1/2"	25	250
*RS-125	1-1/4"	1	25
*RS-150	1-1/2"	1	25
*RS-200	2"	1	10



MALLEABLE IRON RIGID CONNECTORS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MRS-50 NEW	1/2"	-	25
MRS-75 NEW	3/4"	-	25
MRS-100 NEW	1"	-	25
MRS-125 NEW	1-1/4"	5	50
MRS-150 NEW	1-1/2"	5	50
MRS-200 NEW	2"	-	20



STEEL RIGID COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ For use in dry location

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*RSC-50	1/2"	25	250
*RSC-75	3/4"	25	250
*RSC-100	1"	10	100
*RSC-125	1-1/4"	1	25
*RSC-150	1-1/2"	1	25
*RSC-200	2"	1	10



MALLEABLE IRON RIGID COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MRCS-50 NEW	1/2"	-	25
MRCS-75 NEW	3/4"	-	25
MRCS-100 NEW	1"	-	25
MRCS-125 NEW	1-1/4"	5	50
MRCS-150 NEW	1-1/2"	4	40
MRCS-200 NEW	2"	-	20



D32 | Rigid/IMC Fittings



STEEL RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped

Cat. No.	Rigid Size	EMT Size	Std. Pkg.	Master Ctn.
SRECS-50	1/2"	1/2"	25	250
SRECS-75	3/4"	3/4"	10	100
SRECS-100	1"	1"	10	100



1/2" to 3/4"

1"

STEEL THREADLESS RIGID CONNECTORS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RT-50	1/2"	25	250
RT-75	3/4"	25	250
RT-100	1"	10	100
RT-125	1-1/4"	1	25
RT-150	1-1/2"	1	25
RT-200	2"	1	10



MALLEABLE IRON THREADLESS RIGID CONNECTORS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MRT-50	1/2"	25	100
MRT-75	3/4"	25	100
MRT-100	1"	5	25
MRT-125	1-1/4"	-	25
MRT-150	1-1/2"	-	25
MRT-200	2"	-	10
MRT-250	2-1/2"	-	10
MRT-300	3"	-	10
MRT-350	3-1/2"	-	6
MRT-400	4"	-	6



STEEL THREADLESS RIGID COUPLINGS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RTC-50	1/2"	25	250
RTC-75	3/4"	25	250
RTC-100	1"	10	100
RTC-125	1-1/4"	1	25
RTC-150	1-1/2"	1	25
RTC-200	2"	1	10



MALLEABLE IRON THREADLESS RIGID COUPLINGS COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MRTC-50	1/2"	10	100
MRTC-75	3/4"	10	100
MRTC-100	1"	5	50
MRTC-125	1-1/4"	5	50
MRTC-150	1-1/2"	-	12
MRTC-200	2"	-	5
MRTC-250	2-1/2"	-	5
MRTC-300	3"	-	3
MRTC-350	3-1/2"	-	2
MRTC-400	4"	-	2



MALLEABLE IRON THREE-PIECE RIGID CONDUIT COUPLINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MR3C-50	1/2"	10	100
MR3C-75	3/4"	10	100
MR3C-100	1"	5	50
MR3C-125	1-1/4"	5	50
MR3C-150	1-1/2"	3	30
MR3C-200	2"	-	5
MR3C-250	2-1/2"	-	5
MR3C-300	3"	-	5
MR3C-350	3-1/2"	-	4
MR3C-400	4"	-	4




STEEL RIGID THREADED COUPLINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	DIMENSIONS		Std. Pkg.
		D	L	
RC-50	1/2"	0.995"	1.625"	100
RC-75	3/4"	1.235"	1.641"	50
RC-100	1"	1.515"	1.970"	30
RC-125	1-1/4"	1.851"	2.032"	20
RC-150	1-1/2"	2.138"	2.063"	20
RC-200	2"	2.624"	2.125"	20
RC-250	2-1/2"	3.218"	3.188"	24
RC-300	3"	3.831"	3.313"	16
RC-350	3-1/2"	4.455"	3.406"	12
RC-400	4"	4.831"	3.516"	10
RC-500	5"	5.940"	3.954"	1
RC-600	6"	7.128"	4.250"	1

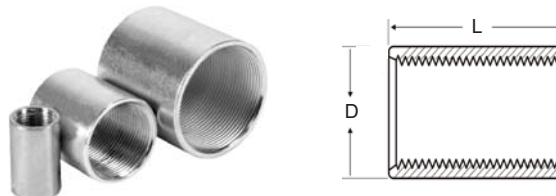

D34 | Rigid/IMC Fittings



ZINC DIE CAST RIGID TO FLEX COUPLINGS CLAMP TYPE

PRODUCT FEATURES

- ▶ For steel Flex only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF697	1/2"	25	250



ZINC DIE CAST RIGID TO FLEX COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ For steel Flex only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF694	1/2"	25	250
OF695	3/4"	25	250



STEEL RIGID TO EMT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Compression type for EMT conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	Rigid Size	EMT Size	Std. Pkg.	Master Ctn.
SREC-50	1/2"	1/2"	25	100
SREC-75	3/4"	3/4"	25	100
SREC-100	1"	1"	10	40



STEEL RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	Rigid Size	LT Size	Std. Pkg.	Master Ctn.
SRLTC-50	1/2"	1/2"	25	100
SRLTC-75	3/4"	3/4"	10	40
SRLTC-100	1"	1"	10	40
SRLTC-125	1-1/4"	1-1/4"	5	20
SRLTC-150	1-1/2"	1-1/2"	-	15
SRLTC-200	2"	2"	-	10



ZINC DIE CAST WATERTIGHT HUBS

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator

NOTES

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
WH-50	1/2"	25	125
WH-75	3/4"	25	125
WH-100	1"	25	125
WH-125	1-1/4"	10	50
WH-150	1-1/2"	10	50
WH-200	2"	10	50
WH-250	2-1/2"	5	25
WH-300	3"	2	10
WH-350	3-1/2"	2	10
WH-400	4"	2	10



ZINC DIE CAST GROUNDED WATERTIGHT HUBS

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator
- ▶ Grounding Post & Screw

NOTES

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
WHG-50	1/2"	25	125
WHG-75	3/4"	25	125
WHG-100	1"	25	125
WHG-125	1-1/4"	10	50
WHG-150	1-1/2"	10	50
WHG-200	2"	10	50
WHG-250	2-1/2"	5	25
WHG-300	3"	2	10
WHG-350	3-1/2"	2	10
WHG-400	4"	2	10



MALLEABLE IRON GROUNDED WATERTIGHT HUBS

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator
- ▶ Grounding Screw
- ▶ Electroplated Zinc

NOTES

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MWHG-50	1/2"	25	250
MWHG-75	3/4"	25	100
MWHG-100	1"	10	100
MWHG-125	1-1/4"	5	50
MWHG-150	1-1/2"	2	20
MWHG-200	2"	2	20
MWHG-250	2-1/2"	-	10
MWHG-300	3"	-	5
MWHG-350	3-1/2"	-	5
MWHG-400	4"	-	5



1/2"

1-1/2"



D36 | Rigid/IMC Fittings



MALLEABLE IRON 90° ANGLE THREADED SHORT ELBOWS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MSE90-50	1/2"	50	200
MSE90-75	3/4"	25	100
MSE90-100	1"	25	100



ZINC DIE CAST RIGID TO BOX PULL ELBOWS WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PEB-50	1/2"	10	100
PEB-75	3/4"	5	50
PEB-100	1"	-	25
PEB-125	1-1/4"	-	20



RIGID

ZINC DIE CAST RIGID TO RIGID PULL ELBOWS WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PE-50	1/2"	10	100
PE-75	3/4"	5	50
PE-100	1"	-	25
PE-125	1-1/4"	-	20



RIGID

MALLEABLE IRON CONDUIT CLAMPS EDGE TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCE-50	1/2"	50
MCCE-75	3/4"	50
MCCE-100	1"	25
MCCE-125	1-1/4"	25
MCCE-150	1-1/2"	25
MCCE-200	2"	25
MCCE-250	2-1/2"	10
MCCE-300	3"	10



1/2"

1"

MALLEABLE IRON CONDUIT CLAMPS RIGHT ANGLE TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCR-50	1/2"	50
MCCR-75	3/4"	50
MCCR-100	1"	50
MCCR-125	1-1/4"	50
MCCR-150	1-1/2"	50
MCCR-200	2"	50
MCCR-250	2-1/2"	25
MCCR-300	3"	25
MCCR-350	3-1/2"	25
MCCR-400	4"	25



1/2"

1"

MALLEABLE IRON CONDUIT CLAMPS PARALLEL TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCP-50	1/2"	50
MCCP-75	3/4"	50
MCCP-100	1"	50
MCCP-125	1-1/4"	25
MCCP-150	1-1/2"	25
MCCP-200	2"	25
MCCP-250	2-1/2"	10
MCCP-300	3"	10
MCCP-350	3-1/2"	10
MCCP-400	4"	10



1/2"

1"



D38 | Rigid/IMC Fittings



STAMPED STEEL UNIVERSAL STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Listed for EMT, IMC and Rigid **ST-50 to ST-200:**
- ▶ Break-apart design without Nut
- ▶ Improved Screw Hole Threads in 2024
- ▶ **STN-50 to STN-200 & ST-250 to ST-400:**
- ▶ Two-piece design with Nut

Cat. No. With Nut	Cat. No. Without Nut	Trade Size	Std. Pkg.
STN-50	ST-50	1/2"	100
STN-75	ST-75	3/4"	100
STN-100	ST-100	1"	100
STN-125	ST-125	1-1/4"	100
STN-150	ST-150	1-1/2"	50
STN-200	ST-200	2"	50
ST-250		2-1/2"	50
ST-300		3"	25
ST-350		3-1/2"	25
ST-400		4"	25



STN-50 to STN-200
ST-250 to ST-400



ST-50 to ST-200

STAMPED STEEL SADDLE TYPE STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Tri-Combo Hex Screw Head
- ▶ Wide Saddle Design

Cat. No.	EMT/Rigid/FMC Conduit Size	Cable O.D. Range	Std. Pkg.
STS-50	5/16" - 1/2"	0.260" - 0.890"	100
STS-75	3/4"	0.670" - 1.090"	100
STS-100	1"	0.890" - 1.450"	100
STS-125	1-1/4"	1.150" - 1.700"	50
STS-150	1-1/2"	1.350" - 2.000"	50
STS-200	2"	1.875" - 2.570"	50
STS-250	2-1/2"	2.500" - 3.060"	25
STS-300	3"	3.000" - 3.600"	25
STS-350	3-1/2"	3.600" - 4.100"	25
STS-400	4"	4.100" - 4.700"	25



STAMPED STEEL CONDUIT HANGERS WITH BOLTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	EMT Size	Rigid Size	Std. Pkg.	Master Ctn.
PH-50B	#0B	1/2"	1/2" & 3/8"	50	500
PH-75B	#1B	3/4"	3/4"	50	500
PH-100B	#2B	1"	1"	25	250
PH-105B	#2-1/2B	1-1/4"	-	25	250
PH-125B	#3B	1-1/2"	1-1/4"	50	250
PH-150B	#4B	-	1-1/2"	50	250
PH-200B	#5B	2"	2"	20	100
PH-250B	#6B	2-1/2"	2-1/2"	10	50
PH-300B	#7B	3"	3"	10	50
PH-350B	#8B	3-1/2"	3-1/2"	10	50
PH-400B	#9B	4"	4"	5	25



STAMPED STEEL 1-HOLE RIGID STRAPS

PRODUCT FEATURES


- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for EMT and IMC Conduits



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SR1-50	1/2"	100	1000
SR1-75	3/4"	100	1000
SR1-100	1"	100	500
SR1-125	1-1/4"	100	500
SR1-150	1-1/2"	50	500
SR1-200	2"	50	500
SU1-250	2-1/2"	25	100
SU1-300	3"	25	100
SU1-350	3-1/2"	25	100
SU1-400	4"	25	100

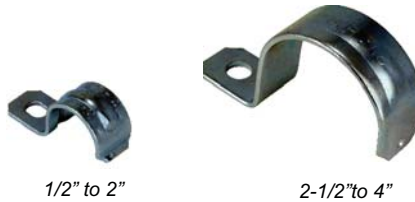

STAMPED STEEL 2-HOLE RIGID STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for EMT and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SR2-50	1/2"	100	1000
SR2-75	3/4"	100	1000
SR2-100	1"	100	500
SR2-125	1-1/4"	100	500
SR2-150	1-1/2"	50	500
SR2-200	2"	50	500
SU2-250	2-1/2"	25	100
SU2-300	3"	25	100
SU2-350	3-1/2"	25	100
SU2-400	4"	25	100



MALLEABLE IRON 1-HOLE RIGID STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SRM1-50	1/2"	100	1000
SRM1-75	3/4"	50	500
SRM1-100	1"	25	250
SRM1-125	1-1/4"	20	200
SRM1-150	1-1/2"	10	100
SRM1-200	2"	10	50
SRM1-250	2-1/2"	-	25
SRM1-300	3"	-	25
SRM1-350	3-1/2"	-	10
SRM1-400	4"	-	10



D40 | Rigid/IMC Fittings



MALLEABLE IRON CLAMP BACK SPACERS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CBS-50	1/2"	25	250
CBS-75	3/4"	25	250
CBS-100	1"	25	250
CBS-125	1-1/4"	10	100
CBS-150	1-1/2"	10	100
CBS-200	2"	5	50
CBS-250	2-1/2"	-	25
CBS-300	3"	-	10
CBS-350	3-1/2"	-	10
CBS-400	4"	-	10

MACHINED STEEL REDUCING BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RB-50/38	1/2" to 3/8"	100	500
RB-75/50	3/4" to 1/2"	100	500
RB-100/50	1" to 1/2"	50	250
RB-100/75	1" to 3/4"	50	250
RB-125/50	1-1/4" to 1/2"	20	100
RB-125/75	1-1/4" to 3/4"	20	100
RB-125/100	1-1/4" to 1"	20	100
RB-150/50	1-1/2" to 1/2"	10	50
RB-150/75	1-1/2" to 3/4"	10	50
RB-150/100	1-1/2" to 1"	10	50
RB-150/125	1-1/2" to 1-1/4"	10	50
RB-200/50	2" to 1/2"	10	50
RB-200/75	2" to 3/4"	10	50
RB-200/100	2" to 1"	10	50
RB-200/125	2" to 1-1/4"	10	50
RB-200/150	2" to 1-1/2"	10	50

MALLEABLE IRON REDUCING BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RB-250/200	2-1/2" to 2"	10	50
RB-300/200	3" to 2"	10	50
RB-300/250	3" to 2-1/2"	10	50
RB-350/250	3-1/2" to 2-1/2"	5	20
MRB-350/300	3-1/2" to 3"	5	20
MRB-400/350	4" to 3-1/2"	5	20

STEEL RIGID MALE ENLARGERS

PRODUCT FEATURES

- ▶ Electroplated Zinc



SME-50/75



SME-100/125

Cat. No.	Male Size	Female Size	Std. Pkg.	Master Ctn.
SME-50/75	1/2"	3/4"	25	250
SME-75/100	3/4"	1"	10	100
SME-100/125	1"	1-1/4"	10	100

PVC PLASTIC INSULATING BUSHINGS

PRODUCT FEATURES

- ▶ 105°C Rated
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PB-50	1/2"	100	1000
PB-75	3/4"	100	1000
PB-100	1"	50	500
PB-125	1-1/4"	25	250
PB-150	1-1/2"	25	250
PB-200	2"	10	100
PB-250	2-1/2"	10	100
PB-300	3"	-	20
PB-350	3-1/2"	-	20
PB-400	4"	-	10
PB-500	5"	-	10
PB-600	6"	-	10

ZINC DIE CAST CONDUIT BUSHINGS

PRODUCT FEATURES

- ▶ Full Machine-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CB-50	1/2"	100	1000
CB-75	3/4"	50	500
CB-100	1"	50	500
CB-125	1-1/4"	25	250
CB-150	1-1/2"	25	250
CB-200	2"	15	90
CB-250	2-1/2"	2	10
CB-300	3"	2	10
CB-350	3-1/2"	-	5
CB-400	4"	-	5

ZINC DIE CAST INSULATED CONDUIT BUSHINGS

PRODUCT FEATURES

- ▶ Full Machine-Cut Internal Threads
- ▶ Insulated Throat
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CBI-50	1/2"	100	1000
CBI-75	3/4"	50	500
CBI-100	1"	50	500
CBI-125	1-1/4"	25	250
CBI-150	1-1/2"	25	250
CBI-200	2"	15	90
CBI-250	2-1/2"	2	10
CBI-300	3"	2	10
CBI-350	3-1/2"	-	5
CBI-400	4"	-	5

MALLEABLE IRON INSULATED CONDUIT BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 105°C rated insulated throat

NOTE

- ▶ Insulated color may vary



3/4"



1-1/4"

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCBI-50	1/2"	100	1000
MCBI-75	3/4"	50	500
MCBI-100	1"	50	500
MCBI-125	1-1/4"	25	250
MCBI-150	1-1/2"	25	100
MCBI-200	2"	10	100
MCBI-250	2-1/2"	-	50
MCBI-300	3"	-	25
MCBI-350	3-1/2"	-	25
MCBI-400	4"	-	10
MCBI-500	5"	-	10
MCBI-600	6"	-	10



D42 | Rigid/IMC Fittings



ZINC DIE CAST GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
GBLL-50	1/2"	#14 - #4	50	500
GBLL-75	3/4"	#14 - #4	40	400
GBLL-100	1"	#14 - #4	15	150
GBLL-125	1-1/4"	#14 - #4	15	150
GBLL-125-10	1-1/4"	#14 - #1/0	20	200
GBLL-150	1-1/2"	#14 - #4	10	100
GBLL-150-10	1-1/2"	#14 - #1/0	10	100
GBLL-200	2"	#14 - #4	5	50
GBLL-200-10	2"	#14 - #1/0	10	100
GBLL-250	2-1/2"	#6 - #250MCM	5	50
GBLL-250-10	2-1/2"	#14 - #1/0	-	50
GBLL-300	3"	#6 - #250MCM	5	50
GBLL-300-10	3"	#14 - #1/0	-	50
GBLL-350	3-1/2"	#6 - #250MCM	4	40
GBLL-350-10	3-1/2"	#14 - #1/0	-	10
GBLL-400	4"	#6 - #250MCM	4	40
GBLL-400-10	4"	#14 - #1/0	-	10

Electrical Fittings

MALLEABLE IRON GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Full Machine-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MGBLL-50	1/2"	#14 - #4	50	200
MGBLL-75	3/4"	#14 - #4	25	100
MGBLL-100	1"	#14 - #4	25	100
MGBLL-125	1-1/4"	#14 - #4	10	50
MGBLL-125-10	1-1/4"	#14 - #1/0	20	200
MGBLL-150	1-1/2"	#14 - #4	10	50
MGBLL-150-10	1-1/2"	#14 - #1/0	10	100
MGBLL-200	2"	#14 - #4	10	50
MGBLL-200-10	2"	#14 - #1/0	10	100
MGBLL-250	2-1/2"	#6 - #250MCM	5	25
MGBLL-250-10	2-1/2"	#14 - #1/0	-	50
MGBLL-300	3"	#6 - #250MCM	5	25
MGBLL-300-10	3"	#14 - #1/0	-	25
MGBLL-350	3-1/2"	#6 - #250MCM	-	5
MGBLL-350-10	3-1/2"	#14 - #1/0	-	10
MGBLL-400	4"	#6 - #250MCM	-	5
MGBLL-400-10	4"	#14 - #1/0	-	10
MGBLL-500	5"	#6 - #250MCM	-	5
MGBLL-500-30	5"	#6 - #3/0	-	5
MGBLL-600	6"	#6 - #250MCM	-	5
MGBLL-600-30	6"	#6 - #3/0	-	5

GALVANIZED STAMPED STEEL REDUCING WASHERS

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RW-75/50	3/4" to 1/2"	250	1000
RW-100/50	1" to 1/2"	250	1000
RW-100/75	1" to 3/4"	250	1000
RW-125/50	1-1/4" to 1/2"	100	400
RW-125/75	1-1/4" to 3/4"	100	400
RW-125/100	1-1/4" to 1"	100	400
RW-150/50	1-1/2" to 1/2"	-	100
RW-150/75	1-1/2" to 3/4"	-	100
RW-150/100	1-1/2" to 1"	-	100
RW-150/125	1-1/2" to 1-1/4"	-	100
RW-200/50	2" to 1/2"	-	50
RW-200/75	2" to 3/4"	-	50
RW-200/100	2" to 1"	-	50
RW-200/125	2" to 1-1/4"	-	50
RW-200/150	2" to 1-1/2"	-	50
RW-250/50	2-1/2" to 1/2"	25	100
RW-250/75	2-1/2" to 3/4"	25	100
RW-250/100	2-1/2" to 1"	25	100
RW-250/125	2-1/2" to 1-1/4"	25	100
RW-250/150	2-1/2" to 1-1/2"	25	100
RW-250/200	2-1/2" to 2"	25	100
RW-300/50	3" to 1/2"	-	25
RW-300/75	3" to 3/4"	-	25
RW-300/100	3" to 1"	-	25
RW-300/125	3" to 1-1/4"	-	25
RW-300/150	3" to 1-1/2"	-	25
RW-300/200	3" to 2"	-	25
RW-300/250	3" to 2-1/2"	-	25
RW-350/50	3-1/2" to 1/2"	-	10
RW-350/75	3-1/2" to 3/4"	-	10
RW-350/100	3-1/2" to 1"	-	10
RW-350/125	3-1/2" to 1-1/4"	-	10
RW-350/150	3-1/2" to 1-1/2"	-	10
RW-350/200	3-1/2" to 2"	-	10
RW-350/250	3-1/2" to 2-1/2"	-	10
RW-350/300	3-1/2" to 3"	-	10
RW-400/50	4" to 1/2"	-	10
RW-400/75	4" to 3/4"	-	10
RW-400/100	4" to 1"	-	10
RW-400/125	4" to 1-1/4"	-	10
RW-400/150	4" to 1-1/2"	-	10
RW-400/200	4" to 2"	-	10
RW-400/250	4" to 2-1/2"	-	10
RW-400/300	4" to 3"	-	10
RW-400/350	4" to 3-1/2"	-	10

Electrical Fittings





ZINC DIE CAST CONDUIT LOCKNUTS

PRODUCT FEATURES

- ▶ Full-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LN-50	1/2"	100	1000
LN-75	3/4"	100	1000
LN-100	1"	100	1000
LN-125	1-1/4"	50	500
LN-150	1-1/2"	50	500
LN-200	2"	25	250
LN-250	2-1/2"	10	100
LN-300	3"	5	50
LN-350	3-1/2"	5	50
LN-400	4"	-	25



STEEL CONDUIT LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Full-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SLN-50	1/2"	100	1000
SLN-75	3/4"	100	1000
SLN-100	1"	100	1000
SLN-125	1-1/4"	50	500
SLN-150	1-1/2"	50	500
SLN-200	2"	25	250
SLN-250	2-1/2"	10	100
SLN-300	3"	5	50
SLN-350	3-1/2"	5	50
SLN-400	4"	-	25
SLN-500	5"	-	10
SLN-600	6"	-	10



STEEL SEALING LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Bonded with Molten Sealing Material
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSLN-50	1/2"	100	1000
SSLN-75	3/4"	100	1000
SSLN-100	1"	100	1000
SSLN-125	1-1/4"	50	500
SSLN-150	1-1/2"	50	500
SSLN-200	2"	25	250
SSLN-250	2-1/2"	10	100
SSLN-300	3"	5	50
SSLN-350	3-1/2"	5	50
SSLN-400	4"	-	25
SSLN-500	5"	-	10
SSLN-600	6"	-	10



STEEL GROUNDING (BONDING) RIGID LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
GL-50	1/2"	50	200
GL-75	3/4"	25	100
GL-100	1"	25	100
GL-125	1-1/4"	10	50
GL-150	1-1/2"	10	50
GL-200	2"	10	50
GL-250	2-1/2"	5	25
GL-300	3"	5	25
GL-350	3-1/2"	-	5
GL-400	4"	-	5
GL-500	5"	-	5
GL-600	6"	-	5



STEEL LIQUID TIGHT SEALING RINGS

PRODUCT FEATURES

- ▶ Neoprene Rubber Gasket
- ▶ Steel Retainer
- ▶ Form Liquid tight seal between connector and box



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LTSR-50	1/2"	250	2500
LTSR-75	3/4"	200	2000
LTSR-100	1"	150	1500
LTSR-125	1-1/4"	100	1000
LTSR-150	1-1/2"	50	500
LTSR-200	2"	50	500
LTSR-250	2-1/2"	-	100
LTSR-300	3"	-	100
LTSR-350	3-1/2"	-	50
LTSR-400	4"	-	50



ZINC DIE CAST 3/4" OFFSET NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
ON-50	1/2"	25	250
ON-75	3/4"	20	200
ON-100	1"	10	100
ON-125	1-1/4"	5	50
ON-150	1-1/2"	5	50
ON-200	2"	3	30



D46 | Rigid/IMC Fittings



ZINC DIE CAST 1" LONG CONDUIT CHASE NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CN-50L	1/2"	100	1000
CN-75L	3/4"	50	500
CN-100L	1"	25	250



ZINC DIE CAST CONDUIT CHASE NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CN-50	1/2"	100	1000
CN-75	3/4"	100	1000
CN-100	1"	50	500
CN-125	1-1/4"	25	250
CN-150	1-1/2"	25	250
CN-200	2"	15	90



ZINC DIE CAST INSULATED CONDUIT CHASE NIPPLES


PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Insulated color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CNI-50	1/2"	100	1000
CNI-75	3/4"	100	1000
CNI-100	1"	50	500
CNI-125	1-1/4"	25	250
CNI-150	1-1/2"	25	250
CNI-200	2"	15	90
CNI-250	2-1/2"	2	10
CNI-300	3"	2	10
CNI-350	3-1/2"	-	5
CNI-400	4"	-	5



MALLEABLE IRON RIGID FLOOR FLANGES

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	Std. Pkg.
FR-50	1/2"	50
FR-75	3/4"	50
FR-100	1"	50
FR-125	1-1/4"	25
FR-150	1-1/2"	25
FR-200	2"	25



MALLEABLE IRON CONCRETE SLAB INSERTS STRAIGHT

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCSI-50	1/2"	10	100
MCSI-75	3/4"	10	100
MCSI-100	1"	10	50

MALLEABLE IRON CONCRETE SLAB INSERTS 90° ANGLE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCSI90-50	1/2"	10	100
MCSI90-75	3/4"	10	100
MCSI90-100	1"	10	50

STEEL CONDUIT LOCKING CONNECTORS

PRODUCT FEATURES

- ▶ Holes for branch line restraints
- ▶ Locknut Included

**PATENT
PENDING**

**ORBIT INDUSTRIES
EXCLUSIVE**



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CLCSL-50	1/2"	10	100
CLCSL-75	3/4"	10	100

DIE CAST ALUMINUM METER HUBS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Rain-tight




Cat. No.	Trade Size	Std. Pkg.
AMH-100	1"	10
AMH-125	1-1/4"	10
AMH-150	1-1/2"	10
AMH-200	2"	10
AMH-250	2-1/2"	10

STEEL ROOF COUPLING PLATES

PRODUCT FEATURES

- ▶ Allows for easy transition of different conduit types
- ▶ Suitable in any type of new or old work roof construction
- ▶ Allows conduit to run below the roof-line, reducing time spent de-rating conductors
- ▶ Different conduit stubs can be prefabricated to plate
- ▶ Maintains roof integrity by reducing support penetrations
- ▶ Can be used for through floor conduit penetrations



Cat. No.	Trade Size	Std. Pkg.	Base Plate Size	Base Plate Thickness
RCP-50	1/2"	20	6" x 6"	16 GA
RCP-75	3/4"	20		
RCP-100	1"	20		
RCP-125	1-1/4"	10	8" x 8"	15 GA
RCP-150	1-1/2"	10		
RCP-200	2"	10		

See pg. P18 for Installation Photos

**PATENT
PENDING**

**ORBIT INDUSTRIES
EXCLUSIVE**



D48 | Combination Fittings



STEEL EMT TO FLEX COUPLINGS SET-SCREW/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Set-Screw type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFSD-38	Steel AC: 14/2 (0.450") - 10/2 (0.660")	Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")	1/2"	25 100
	AL AC: 14/2(0.450") - 10/2 (0.660")	AL HCF AC: 14/2 (0.450") - 10/2 (0.660")		
	Steel MCI: 14/2 (0.450") - 10/2 (0.660")	HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")		
	AL MCI: 14/2 (0.450") - 10/2 (0.660")	Steel/AL FMC/RWFMC/XRWFMC: 3/8"		
	AL MCI-A: 14/2 (0.400") - 10/3 (0.590")			
SEFSD-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25 100
	AL AC: 12/4 (0.550") - 6/3 (0.920")	AL HCF AC: 12/4 (0.550") - 6/3 (0.920")		
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")	HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")		
	AL MCI: 10/4 (0.640") - 8/3 (0.920")	Steel/AL FMC/RWFMC/XRWFMC: 1/2"		
	AL MCI-A: 12/4 (0.520") - 8/4 (0.770")			
SEFSD-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25 100
	AL AC: 8/3(0.680") - 4/3 (1.075")	AL HCF AC: 8/3 (0.680") - 4/3 (1.075")		
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")	HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")		
	AL MCI: 6/4 (0.930") - 4/3 (1.075")	Steel/AL FMC/RWFMC/XRWFMC: 3/4"		
	AL MCI-A: 8/4 (0.770") - 6/4 (1.110")			



STEEL EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Compression type for EMT conduit
- ▶ Dual-gripping Saddle Clamp
- ▶ Combo Head Set-Screw
- ▶ For AC, MCI, MCI-A, HCF, RWFMC
- ▶ Suitable for dry location only

Cat. No.	Flex/Cable Range	EMT Size	Std. Pkg.	Master Ctn.
SEFCD-50	Steel AC: 12/4 (0.550") - 6/3 (0.920")	Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")	1/2"	25 100
	AL AC: 12/4 (0.550") - 6/3 (0.920")	AL HCF AC: 12/4 (0.550") - 6/3 (0.920")		
	Steel MCI: 10/4 (0.640") - 8/3 (0.920")	HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")		
	AL MCI: 10/4 (0.640") - 8/3 (0.920")	Steel/AL FMC/RWFMC/XRWFMC: 1/2"		
	AL MCI-A: 12/4 (0.520") - 8/4 (0.770")			
SEFCD-75	Steel AC: 6/4 (0.930") - 4/3 (1.075")	Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")	3/4"	25 100
	AL AC: 8/3(0.680") - 4/3 (1.075")	AL HCF AC: 8/3 (0.680") - 4/3 (1.075")		
	Steel MCI: 8/3 (0.730") - 4/3 (1.075")	HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")		
	AL MCI: 6/4 (0.930") - 4/3 (1.075")	Steel/AL FMC/RWFMC/XRWFMC: 3/4"		
	AL MCI-A: 8/4 (0.770") - 6/4 (1.110")			



STEEL RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight when taped

Cat. No.	Rigid Size	EMT Size	Std. Pkg.	Master Ctn.
SRECS-50	1/2"	1/2"	25	250
SRECS-75	3/4"	3/4"	10	100
SRECS-100	1"	1"	10	100



1/2" to 3/4"

1"

ZINC DIE CAST
EMT TO FLEX COUPLINGS
SET-SCREW/SQUEEZE TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF530	1/2" to 3/8"	50	500
OF531	1/2" to 1/2"	25	250
OF532	3/4" to 3/4"	25	100
OF533	1" to 1"	10	40



ZINC DIE CAST
EMT TO FLEX COUPLINGS
SET-SCREW/CLAMP TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF520	1/2" to 3/8"	50	500
OF521	1/2" to 1/2"	25	250
OF522	3/4" to 3/4"	25	250
OF523	1" to 1"	10	40



ZINC DIE CAST
EMT TO FLEX COUPLINGS
COMPRESSION/SCREW-IN TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF1611	1/2"	50	500
OF1612	3/4"	25	250
OF1613	1"	10	100



STEEL EMT TO LIQUID TIGHT
COMBINATION COUPLINGS
COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Concrete-Tight
- ▶ Rain-Tight



Cat. No.	EMT Size	LT Size	Std. Pkg.	Master Ctn.
SELTC-50	1/2"	1/2"	25	250
SELTC-75	3/4"	3/4"	10	100
SELTC-100	1"	1"	10	100



3/4"



1"



D50 | Combination Fittings



STEEL RIGID TO EMT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Compression type for EMT conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	Rigid Size	EMT Size	Std. Pkg.	Master Ctn.
SREC-50	1/2"	1/2"	25	100
SREC-75	3/4"	3/4"	25	100
SREC-100	1"	1"	10	40



STEEL RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Internally threaded for Rigid/IMC conduit
- ▶ Rain-Tight
- ▶ Concrete-Tight



Cat. No.	Rigid Size	LT Size	Std. Pkg.	Master Ctn.
SRLTC-50	1/2"	1/2"	25	100
SRLTC-75	3/4"	3/4"	10	40
SRLTC-100	1"	1"	10	40
SRLTC-125	1-1/4"	1-1/4"	5	20
SRLTC-150	1-1/2"	1-1/2"	-	15
SRLTC-200	2"	2"	-	10



ZINC DIE CAST RIGID TO FLEX COUPLINGS CLAMP TYPE

PRODUCT FEATURES

- ▶ For steel Flex only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF697	1/2"	25	250



ZINC DIE CAST RIGID TO FLEX COUPLINGS SET-SCREW TYPE

PRODUCT FEATURES

- ▶ For steel Flex only

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF694	1/2"	25	250
OF695	3/4"	25	250



ZINC DIE CAST
RIGID TO BOX PULL ELBOWS
WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



RIGID

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PEB-50	1/2"	10	100
PEB-75	3/4"	5	50
PEB-100	1"	-	25
PEB-125	1-1/4"	-	20

ZINC DIE CAST
RIGID TO RIGID PULL ELBOWS
WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



RIGID

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PE-50	1/2"	10	100
PE-75	3/4"	5	50
PE-100	1"	-	25
PE-125	1-1/4"	-	20

ZINC DIE CAST
EMT TO BOX PULL ELBOWS
SET-SCREW TYPE
WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPEB-G50	1/2"	10	100
SSPEB-G75	3/4"	5	50
SSPEB-G100	1"	-	25
SSPEB-G125	1-1/4"	-	20

ZINC DIE CAST
EMT TO BOX PULL ELBOWS
SET-SCREW TYPE
WITHOUT GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*SSPEB-50	1/2"	10	100
*SSPEB-75	3/4"	5	50
*SSPEB-100	1"	-	25
*SSPEB-125	1-1/4"	-	20

ZINC DIE CAST
EMT TO EMT PULL ELBOWS
SET-SCREW TYPE
WITH GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPE-G50	1/2"	10	100
SSPE-G75	3/4"	5	50
SSPE-G100	1"	-	25
SSPE-G125	1-1/4"	-	20

ZINC DIE CAST
EMT TO EMT PULL ELBOWS
SET-SCREW TYPE
WITHOUT GASKET

PRODUCT FEATURES

- ▶ Aluminum Cover



SET-SCREW EMT

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSPE-50	1/2"	10	100
SSPE-75	3/4"	5	50
SSPE-100	1"	-	25
SSPE-125	1-1/4"	-	20



*While Supplies Last



D52 | Cast Device Boxes and Covers



MALLEABLE IRON 1-GANG CAST DEVICE BOXES DEAD END 2" DEEP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Dead-end configurations
- ▶ For both outdoor and indoor use (for outdoor when used with gasket and cover)



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
1MFS-50	1/2"	1	5
1MFS-75	3/4"	1	5
1MFS-100	1"	1	5



MALLEABLE IRON 1-GANG DEEP CAST DEVICE BOXES DEAD END 2-7/10" DEEP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Dead-end configurations
- ▶ For both outdoor and indoor use (for outdoor when used with gasket and cover)



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
1MFD-50	1/2"	1	5
1MFD-75	3/4"	1	5
1MFD-100	1"	1	5



MALLEABLE IRON 1-GANG CAST DEVICE BOXES FEED THROUGH 2" DEEP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Feed-Through configurations
- ▶ For both outdoor and indoor use (for outdoor when used with gasket and cover)



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
1MFSC-50	1/2"	1	5
1MFSC-75	3/4"	1	5
1MFSC-100	1"	1	5



MALLEABLE IRON 1-GANG DEEP CAST DEVICE BOXES FEED THROUGH 2-7/10" DEEP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Feed-Through configurations
- ▶ For both outdoor and indoor use (for outdoor when used with gasket and cover)



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
1MFDC-50	1/2"	1	5
1MFDC-75	3/4"	1	5
1MFDC-100	1"	1	5



MALLEABLE IRON 1-GANG CAST DEVICE BOX COVERS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ For use with FS & FD cast device box



Cat. No.	Description	Std. Pkg.
1MFC-B	Blank	20
1MFC-D	Duplex	20
1MFC-TS	Guarded Toggle Switch	20



STEEL 1-GANG CAST DEVICE BOX COVERS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ For use with FS & FD cast device box

Cat. No.	Description	Std. Pkg.
1SFC-B	Blank	25
1SFC-D	Duplex	25
1SFC-TS	Unguarded Toggle Switch	25
1SFC-G	GFI	25



NEOPRENE 1-GANG CAST DEVICE BOX GASKET

PRODUCT FEATURES

- ▶ For use with FS & FD cast device box

Cat. No.	Description	Std. Pkg.
FG-1	Neoprene Gasket	50





STEEL GROUNDING (BONDING) RIGID LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
GL-50	1/2"	50	200
GL-75	3/4"	25	100
GL-100	1"	25	100
GL-125	1-1/4"	10	50
GL-150	1-1/2"	10	50
GL-200	2"	10	50
GL-250	2-1/2"	5	25
GL-300	3"	5	25
GL-350	3-1/2"	-	5
GL-400	4"	-	5
GL-500	5"	-	5
GL-600	6"	-	5



Electrical Fittings

ZINC DIE CAST GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
GBLL-50	1/2"	#14 - #4	50	500
GBLL-75	3/4"	#14 - #4	40	400
GBLL-100	1"	#14 - #4	15	150
GBLL-125	1-1/4"	#14 - #4	15	150
GBLL-125-10	1-1/4"	#14 - #1/0	20	200
GBLL-150	1-1/2"	#14 - #4	10	100
GBLL-150-10	1-1/2"	#14 - #1/0	10	100
GBLL-200	2"	#14 - #4	5	50
GBLL-200-10	2"	#14 - #1/0	10	100
GBLL-250	2-1/2"	#6 - #250MCM	5	50
GBLL-250-10	2-1/2"	#14 - #1/0	-	50
GBLL-300	3"	#6 - #250MCM	5	50
GBLL-300-10	3"	#14 - #1/0	-	50
GBLL-350	3-1/2"	#6 - #250MCM	4	40
GBLL-350-10	3-1/2"	#14 - #1/0	-	10
GBLL-400	4"	#6 - #250MCM	4	40
GBLL-400-10	4"	#14 - #1/0	-	10



MALLEABLE IRON GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Full Machine-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MGBLL-50	1/2"	#14 - #4	50	200
MGBLL-75	3/4"	#14 - #4	25	100
MGBLL-100	1"	#14 - #4	25	100
MGBLL-125	1-1/4"	#14 - #4	10	50
MGBLL-125-10	1-1/4"	#14 - #1/0	20	200
MGBLL-150	1-1/2"	#14 - #4	10	50
MGBLL-150-10	1-1/2"	#14 - #1/0	10	100
MGBLL-200	2"	#14 - #4	10	50
MGBLL-200-10	2"	#14 - #1/0	10	100
MGBLL-250	2-1/2"	#6 - #250MCM	5	25
MGBLL-250-10	2-1/2"	#14 - #1/0	-	50
MGBLL-300	3"	#6 - #250MCM	5	25
MGBLL-300-10	3"	#14 - #1/0	-	25
MGBLL-350	3-1/2"	#6 - #250MCM	-	5
MGBLL-350-10	3-1/2"	#14 - #1/0	-	10
MGBLL-400	4"	#6 - #250MCM	-	5
MGBLL-400-10	4"	#14 - #1/0	-	10
MGBLL-500	5"	#6 - #250MCM	-	5
MGBLL-500-30	5"	#6 - #3/0	-	5
MGBLL-600	6"	#6 - #250MCM	-	5
MGBLL-600-30	6"	#6 - #3/0	-	5



Electrical Fittings

COPPER DIRECT BURIAL MECHANICAL LUGS

PRODUCT FEATURES

- ▶ Stainless Steel Screw

Cat. No.	Wire Range	Std. Pkg.	Master Ctn.
MLDB-14/10	#14 - #10	50	400
MLDB-14/6	#14 - #6	50	400
MLDB-14/4	#14 - #4	25	200
MLDB-6/100	#6 - #1/0	10	80



ALUMINUM TERMINAL LUGS SINGLE BARREL ONE HOLE MOUNT

PRODUCT FEATURES

- ▶ Electro Tinned
- ▶ Single barrel
- ▶ Dual rated for copper and aluminum conductors

Cat. No.	Wire Range	Std. Pkg.	Master Ctn.
FTL-14/4	#14 - #4	50	400
FTL-14/2	#14 - #2	50	400
FTL-14/100	#14 - #1/0	25	200
FTL-14/200	#14 - #2/0	25	200





COPPER DIRECT BURIAL LAY-IN LUGS

PRODUCT FEATURES

- ▶ Stainless Steel Screw



Cat. No.	Wire Range	Std. Pkg.	Master Ctn.
LLDB-14/4	#14 - #4	25	250

COPPER TIN PLATED DIRECT BURIAL LAY-IN LUG

LLTDB-14/4	#14 - #4	25	250
------------	----------	----	-----

COPPER TIN PLATED DIRECT BURIAL LAY-IN LUG FOR SOLAR INSTALLATIONS

LLTDB-SP-14/4	#14 - #4	25	250
---------------	----------	----	-----



LLDB-14/4



LLTDB-14/4



LLTDB-SP-14/4

INTERSYSTEM GROUNDING AND BONDING BRIDGES

PRODUCT FEATURES

- ▶ Available in Zinc or Bronze
- ▶ Compatible with copper or aluminum wire

Cat. No.	CU/AL Wire Range	Material	Std. Pkg.	Master Ctn.
IGBB-5	#6 - #2 AWG Grounding Conductor for Central Hole #14 - #4 AWG Bonding Conductor for Side Hole	Zinc	10	50
IGBB-5B	#6 - #2 AWG Grounding Conductor for Central Hole #14 - #4 AWG Bonding Conductor for Side Hole	Bronze	10	50



IGBB-5



IGBB-5B



**VISIT OUR WEBSITE FOR
AN EXTENSIVE INDUSTRY
CROSS REFERENCE**



ZINC DIE CAST BARE GROUND CLAMP

PRODUCT FEATURES

- ▶ Steel Screws



Cat. No.	Ground		Std. Pkg.	Master Ctn.
	Wire Range	Trade Size		
GCBZ-50/100	#10 - #2	1/2" to 1"	25	200

BRONZE BARE GROUND CLAMPS

PRODUCT FEATURES

- ▶ Steel Screws



Cat. No.	Ground		Std. Pkg.	Master Ctn.
	Wire Range	Trade Size		
GCB-50/100	#10 - #2	1/2" to 1"	25	200
GCB-125/200	#10 - #2	1-1/4" to 2"	10	80
GCB-250/400	#10 - #2	2-1/2" to 4"	-	15
GCB-450/600	#10 - #2	4-1/2" to 6"	-	5

BRONZE BARE GROUND CLAMPS

PRODUCT FEATURES

- ▶ Brass Screws



Cat. No.	Ground		Std. Pkg.	Master Ctn.
	Wire Range	Trade Size		
GCBR-50/100	#10 - #2	1/2" to 1"	25	200

BRONZE ARMORED GROUND CLAMPS

PRODUCT FEATURES

- ▶ Steel Screws
- ▶ For use with #8, #6, #4 AWG Bare Wire or AC (BX) Armored Cable



Cat. No.	Ground		Std. Pkg.	Master Ctn.
	Wire Range	Trade Size		
GCA-50/100	#8 - #4	1/2" to 1"	25	150
GCA-125/200	#8 - #4	1-1/4" to 2"	10	80
GCA-250/400	#8 - #4	2-1/2" to 4"	-	15
GCA-450/600	#8 - #4	4-1/2" to 6"	-	5

BRONZE DIRECT BURIAL BARE GROUND CLAMPS

PRODUCT FEATURES

- ▶ Bronze Screws



Cat. No.	Ground		Std. Pkg.	Master Ctn.
	Wire Range	Trade Size		
GCBB-50/100	#10 - #2	1/2" to 1"	25	200
GCBB-125/200	#10 - #2	1-1/4" to 2"	10	80

- UL Listed for direct burial in earth or concrete.





BRONZE DIRECT BURIAL ARMORED GROUND CLAMPS

PRODUCT FEATURES

- ▶ Bronze Screws
- ▶ For use with #8, #6, #4 AWG Bare Wire or AC (BX) Armored Cable



Cat. No.	Ground Wire Range	Trade Size	Std. Pkg.	Master Ctn.
G CAB-50/100	#8 - #4	1/2" to 1"	25	200

- UL Listed for direct burial in earth or concrete.

BRONZE GROUND CLAMPS WITH ADAPTER

PRODUCT FEATURES

- ▶ Steel Screws



Cat. No.	Ground Wire Range	Trade Size	Std. Pkg.	Master Ctn.
G CAH-50/100	#8 - #4/0	1/2" to 1"	10	80
G CAH-125/200	#8 - #4/0	1-1/4" to 2"	5	40

HEAVY DUTY BRONZE DIRECT BURIAL FOR REBAR GROUND CLAMP

PRODUCT FEATURES

- ▶ Bronze Screws



Cat. No.	Ground Wire Range	Trade Size	Std. Pkg.	Master Ctn.
G CR-50/100	#8 - #2	1/2", 3/4 to 1"	25	200

- UL Listed for direct burial in earth or concrete.

BRONZE LAY-IN GROUND CLAMP

PRODUCT FEATURES

- ▶ Steel Screws



Cat. No.	Ground Wire Range	Trade Size	Std. Pkg.	Master Ctn.
G CRL-38/100	#10 - #2	3/8" to 1" Rebar 1/2" to 1"	25	100

BRONZE DIRECT BURIAL LAY-IN CLAMP

PRODUCT FEATURES

- ▶ Stainless Steel Screws



Cat. No.	Ground Wire Range	Trade Size	Std. Pkg.	Master Ctn.
G CRLDB-38/100	#10 - #2	3/8" to 1" Rebar 1/2" to 1"	25	100

BRONZE CONDUIT CLAMPS FOR RIGID CONDUIT WITH ADAPTER

PRODUCT FEATURES

- ▶ Steel Screws



Cat. No.	Water Pipe Size	Hub Size	Ground Wire Range	Std. Pkg.	Master Ctn.
G CH-50/100-50	1/2" to 1"	1/2"	#10 - #2/0	10	50
G CH-50/100-75	1/2" to 1"	3/4"	#10 - #2/0	10	50
G CH-50/100-100	1/2" to 1"	1"	#10 - #3/0	10	50

BRONZE GROUND CLAMPS FOR RIGID CONDUIT WITH FLEXIBLE COPPER STRAP

PRODUCT FEATURES

- ▶ Steel Screws

Cat. No.	Water Pipe Size	Hub Size	Ground Wire Range	Std. Pkg.
AGS-50	1/2" to 1"	1/2"	#10 - #4	50
AGS-75	1/2" to 1"	3/4"	#10 - #4	50
AGS-100	1/2" to 1"	1"	#10 - #4	50



BRONZE CONDUIT HUB 360° SWING TYPE

PRODUCT FEATURES

- ▶ Steel Screws

Cat. No.	Pipe Size	Ground Wire Range	Std. Pkg.	Master Ctn.
H-50	1/2"	#10 - #2/0	25	200
H-75	3/4"	#10 - #2/0	25	200
H-100	1"	#10 - #3/0	20	160



BRONZE DIRECT BURIAL GROUND ROD CLAMPS

PRODUCT FEATURES

- ▶ Bronze or Stainless Steel Screw

Cat. No.	Ground Rod Size	Ground Wire Range	Std. Pkg.	Master Ctn.
GRC-50	1/2"	#10 - #2	35	280
GRC-58	5/8"	#10 - #2	30	240
GRC-75	3/4"	#10 - #2	20	160

- UL Listed for direct burial in earth or concrete.



D60 | Elbows, Nipples & Couplings




GALVANIZED STEEL 22.5° ANGLE EMT CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 797 and ANSI C80.3

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
EEL22-50	1/2"	4"	1-5/16"	2-5/8"	50
EEL22-75	3/4"	4-1/2"	1-7/16"	2-3/4"	50
EEL22-100	1"	5-3/4"	1-9/16"	2-7/8"	25
EEL22-125	1-1/4"	7-1/4"	1-3/4"	3-1/16"	20
EEL22-150	1-1/2"	8-1/4"	2"	3-1/2"	15
EEL22-200	2"	9-1/2"	2-5/16"	4-1/8"	10
EEL22-250	2-1/2"	10-1/2"	2-3/4"	5-1/16"	BULK
EEL22-300	3"	13"	3-1/4"	5-15/16"	BULK
EEL22-350	3-1/2"	15"	3-11/16"	6-11/16"	BULK
EEL22-400	4"	16"	3-15/16"	7"	BULK




GALVANIZED STEEL 45° ANGLE EMT CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 797 and ANSI C80.3

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
EEL45-50	1/2"	4"	3-1/16"	2-11/16"	50
EEL45-75	3/4"	4-1/2"	3-1/4"	2-3/4"	50
EEL45-100	1"	5-3/4"	3-13/16"	3"	25
EEL45-125	1-1/4"	7-1/4"	4-7/16"	3-1/4"	20
EEL45-150	1-1/2"	8-1/4"	4-15/16"	3-1/2"	15
EEL45-200	2"	9-1/2"	5-13/16"	4-5/16"	10
EEL45-250	2-1/2"	10-1/2"	6-11/16"	5-1/8"	BULK
EEL45-300	3"	13"	8-1/8"	6-1/8"	BULK
EEL45-350	3-1/2"	15"	9-3/16"	6-3/4"	BULK
EEL45-400	4"	16"	9-3/4"	7-1/16"	BULK




GALVANIZED STEEL 90° ANGLE EMT CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 797 and ANSI C80.3

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
EEL90-50	1/2"	4"	6-7/8"	2-7/8"	50
EEL90-75	3/4"	4-1/2"	7-7/16"	2-15/16"	50
EEL90-100	1"	5-3/4"	8-3/4"	3"	25
EEL90-125	1-1/4"	7-1/4"	10-9/16"	3-5/16"	20
EEL90-150	1-1/2"	8-1/4"	11-15/16"	3-5/8"	15
EEL90-200	2"	9-1/2"	13-3/4"	4-1/4"	10
EEL90-250	2-1/2"	10-1/2"	15-3/4"	5-1/4"	BULK
EEL90-300	3"	13"	19-1/8"	6-1/8"	BULK
EEL90-350	3-1/2"	15"	21-3/4"	6-3/4"	BULK
EEL90-400	4"	16"	23-1/8"	7-1/8"	BULK

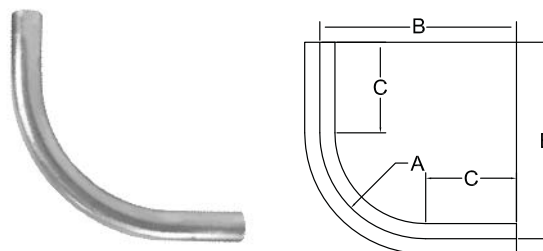


Electrical Fittings

GALVANIZED STEEL
22.5° ANGLE
RIGID CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 6 and ANSI C80.1
- ▶ NPT Thread

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
REL22-50	1/2"	4"	1-5/16"	2-5/8"	50
REL22-75	3/4"	4-1/2"	1-7/16"	2-3/4"	50
REL22-100	1"	5-3/4"	1-9/16"	2-7/8"	25
REL22-125	1-1/4"	7-1/4"	1-3/4"	3-1/16"	20
REL22-150	1-1/2"	8-1/4"	2"	3-1/2"	15
REL22-200	2"	9-1/2"	2-5/16"	4-1/8"	10
REL22-250	2-1/2"	10-1/2"	2-3/4"	5-1/16"	BULK
REL22-300	3"	13"	3-1/4"	5-15/16"	BULK
REL22-350	3-1/2"	15"	3-11/16"	6-11/16"	BULK
REL22-400	4"	16"	3-15/16"	7"	BULK



GALVANIZED STEEL
45° ANGLE
RIGID CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 6 and ANSI C80.1
- ▶ NPT Thread

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
REL45-50	1/2"	4"	3-1/16"	2-11/16"	50
REL45-75	3/4"	4-1/2"	3-1/4"	2-3/4"	50
REL45-100	1"	5-3/4"	3-13/16"	3"	25
REL45-125	1-1/4"	7-1/4"	4-7/16"	3-1/4"	20
REL45-150	1-1/2"	8-1/4"	4-15/16"	3-1/2"	15
REL45-200	2"	9-1/2"	5-13/16"	4-5/16"	10
REL45-250	2-1/2"	10-1/2"	6-11/16"	5-1/8"	BULK
REL45-300	3"	13"	8-1/8"	6-1/8"	BULK
REL45-350	3-1/2"	15"	9-3/16"	6-3/4"	BULK
REL45-400	4"	16"	9-3/4"	7-1/16"	BULK




GALVANIZED STEEL
90° ANGLE
RIGID CONDUIT ELBOWS

PRODUCT FEATURES

- ▶ Meet UL 6 and ANSI C80.1
- ▶ NPT Thread

Cat. No.	Trade Size	DIMENSIONS			Std. Pkg.
		Min. UL Radius (A)	Offset (B)	Straight Length (C)	
REL90-50	1/2"	4"	6-7/8"	2-7/8"	50
REL90-75	3/4"	4-1/2"	7-7/16"	2-15/16"	50
REL90-100	1"	5-3/4"	8-3/4"	3"	25
REL90-125	1-1/4"	7-1/4"	10-9/16"	3-5/16"	20
REL90-150	1-1/2"	8-1/4"	11-15/16"	3-5/8"	15
REL90-200	2"	9-1/2"	13-3/4"	4-1/4"	10
REL90-250	2-1/2"	10-1/2"	15-3/4"	5-1/4"	BULK
REL90-300	3"	13"	19-1/8"	6-1/8"	BULK
REL90-350	3-1/2"	15"	21-3/4"	6-3/4"	BULK
REL90-400	4"	16"	23-1/8"	7-1/8"	BULK

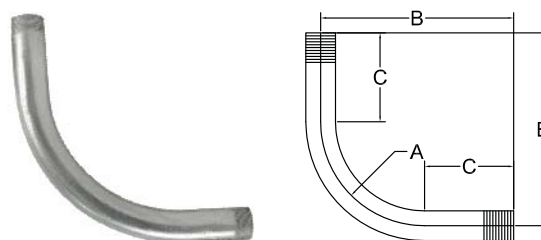

D62 | Elbows, Nipples & Couplings



GALVANIZED STEEL RIGID CONDUIT NIPPLES

PRODUCT FEATURES

- ▶ Meet UL 6 and ANSI C80.1
- ▶ NPT Thread



Electrical Fittings

Cat. No.	Trade Size	Length	Std. Pkg.
RN-50-C	1/2"	1-1/8"	25
RN-50-150	1/2"	1-1/2"	25
RN-50-200	1/2"	2"	25
RN-50-250	1/2"	2-1/2"	25
RN-50-300	1/2"	3"	25
RN-50-350	1/2"	3-1/2"	25
RN-50-400	1/2"	4"	25
RN-50-500	1/2"	5"	25
RN-50-600	1/2"	6"	25
RN-50-800	1/2"	8"	25
RN-50-1000	1/2"	10"	25
RN-50-1200	1/2"	12"	25
RN-75-C	3/4"	1-3/8"	25
RN-75-150	3/4"	1-1/2"	25
RN-75-200	3/4"	2"	25
RN-75-250	3/4"	2-1/2"	25
RN-75-300	3/4"	3"	25
RN-75-350	3/4"	3-1/2"	25
RN-75-400	3/4"	4"	25
RN-75-500	3/4"	5"	25
RN-75-600	3/4"	6"	25
RN-75-800	3/4"	8"	25
RN-75-1000	3/4"	10"	25
RN-75-1200	3/4"	12"	25
RN-100-C	1"	1-1/2"	25
RN-100-200	1"	2"	25
RN-100-250	1"	2-1/2"	25
RN-100-300	1"	3"	25
RN-100-350	1"	3-1/2"	25
RN-100-400	1"	4"	25
RN-100-500	1"	5"	25
RN-100-600	1"	6"	25
RN-100-800	1"	8"	25
RN-100-1000	1"	10"	25
RN-100-1200	1"	12"	25
RN-125-C	1-1/4"	1-5/8"	25
RN-125-200	1-1/4"	2"	25
RN-125-250	1-1/4"	2-1/2"	25
RN-125-300	1-1/4"	3"	25
RN-125-350	1-1/4"	3-1/2"	25
RN-125-400	1-1/4"	4"	25
RN-125-500	1-1/4"	5"	25
RN-125-600	1-1/4"	6"	25
RN-125-800	1-1/4"	8"	25
RN-125-1000	1-1/4"	10"	25
RN-125-1200	1-1/4"	12"	25
RN-150-C	1-1/2"	1-3/4"	25
RN-150-200	1-1/2"	2"	25
RN-150-250	1-1/2"	2-1/2"	25
RN-150-300	1-1/2"	3"	25
RN-150-350	1-1/2"	3-1/2"	25
RN-150-400	1-1/2"	4"	25
RN-150-500	1-1/2"	5"	25
RN-150-600	1-1/2"	6"	25
RN-150-800	1-1/2"	8"	25
RN-150-1000	1-1/2"	10"	25
RN-150-1200	1-1/2"	12"	25
RN-200-C	2"	2"	25
RN-200-250	2"	2-1/2"	25
RN-200-300	2"	3"	25
RN-200-350	2"	3-1/2"	25

GALVANIZED STEEL RIGID CONDUIT NIPPLES

PRODUCT FEATURES


- ▶ Meet UL 6 and ANSI C80.1
- ▶ NPT Thread



STEEL RIGID THREADED COUPLINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Length	Std. Pkg.
RN-200-500	2"	5"	25
RN-200-600	2"	6"	25
RN-200-800	2"	8"	25
RN-200-1000	2"	10"	25
RN-200-1200	2"	12"	25
RN-250-C	2-1/2"	2-1/2"	30
RN-250-300	2-1/2"	3"	25
RN-250-350	2-1/2"	3-1/2"	15
RN-250-400	2-1/2"	4"	15
RN-250-500	2-1/2"	5"	15
RN-250-600	2-1/2"	6"	10
RN-250-800	2-1/2"	8"	5
RN-250-1000	2-1/2"	10"	5
RN-250-1200	2-1/2"	12"	5
RN-300-C	3"	2-5/8"	9
RN-300-300	3"	3"	9
RN-300-350	3"	3-1/2"	9
RN-300-400	3"	4"	9
RN-300-500	3"	5"	9
RN-300-600	3"	6"	9
RN-300-800	3"	8"	9
RN-300-1000	3"	10"	9
RN-300-1200	3"	12"	9
RN-350-C	3-1/2"	2-3/4"	9
RN-350-400	3-1/2"	4"	9
RN-350-500	3-1/2"	5"	9
RN-350-600	3-1/2"	6"	9
RN-350-800	3-1/2"	8"	9
RN-350-1000	3-1/2"	10"	9
RN-350-1200	3-1/2"	12"	9
RN-400-C	4"	2-7/8"	9
RN-400-400	4"	4"	9
RN-400-500	4"	5"	9
RN-400-600	4"	6"	9
RN-400-800	4"	8"	4
RN-400-1000	4"	10"	4
RN-400-1200	4"	12"	4
RN-500-C	5"	3"	4
RN-500-500	5"	5"	4
RN-500-600	5"	6"	4
RN-500-800	5"	8"	4
RN-500-1000	5"	10"	4
RN-500-1200	5"	12"	4
RN-600-C	6"	3-1/8"	4
RN-600-500	6"	5"	4
RN-600-600	6"	6"	4
RN-600-800	6"	8"	4
RN-600-1000	6"	10"	4
RN-600-1200	6"	12"	4

Cat. No.	Trade Size	DIMENSIONS		Std. Pkg.
		D	L	
RC-50	1/2"	0.995"	1.625"	100
RC-75	3/4"	1.235"	1.641"	50
RC-100	1"	1.515"	1.970"	30
RC-125	1-1/4"	1.851"	2.032"	20
RC-150	1-1/2"	2.138"	2.063"	20
RC-200	2"	2.624"	2.125"	20
RC-250	2-1/2"	3.218"	3.188"	24
RC-300	3"	3.831"	3.313"	16
RC-350	3-1/2"	4.455"	3.406"	12
RC-400	4"	4.831"	3.516"	10
RC-500	5"	5.940"	3.954"	1
RC-600	6"	7.128"	4.250"	1

D64 | Elbows, Nipples & Couplings



ZINC DIE CAST 3/4" OFFSET NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
ON-50	1/2"	25	250
ON-75	3/4"	20	200
ON-100	1"	10	100
ON-125	1-1/4"	5	50
ON-150	1-1/2"	5	50
ON-200	2"	3	30

ZINC DIE CAST 1" LONG CONDUIT CHASE NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CN-50L	1/2"	100	1000
CN-75L	3/4"	50	500
CN-100L	1"	25	250

ZINC DIE CAST CONDUIT CHASE NIPPLES

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CN-50	1/2"	100	1000
CN-75	3/4"	100	1000
CN-100	1"	50	500
CN-125	1-1/4"	25	250
CN-150	1-1/2"	25	250
CN-200	2"	15	90


ZINC DIE CAST INSULATED CONDUIT CHASE NIPPLES

PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CNI-50	1/2"	100	1000
CNI-75	3/4"	100	1000
CNI-100	1"	50	500
CNI-125	1-1/4"	25	250
CNI-150	1-1/2"	25	250
CNI-200	2"	15	90
CNI-250	2-1/2"	2	10
CNI-300	3"	2	10
CNI-350	3-1/2"	-	5
CNI-400	4"	-	5

ZINC DIE CAST BOX TO BOX CONNECTOR

PRODUCT FEATURES

- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF781	1/2"	100	500

ZINC DIE CAST INSULATED BOX TO BOX CONNECTOR

PRODUCT FEATURES

- ▶ With Insulated Throat
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
OF781-S	1/2"	100	500

STAMPED STEEL 1-HOLE EMT STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SE1-50	1/2"	100	1000
SE1-75	3/4"	100	1000
SE1-100	1"	100	500
SE1-125	1-1/4"	100	500
SE1-150	1-1/2"	50	500
SE1-200	2"	50	500
SU1-250	2-1/2"	25	100
SU1-300	3"	25	100
SU1-350	3-1/2"	25	100
SU1-400	4"	25	100



1/2" to 2"



2-1/2" to 4"

STAMPED STEEL 2-HOLE EMT STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SE2-50	1/2"	100	1000
SE2-75	3/4"	100	1000
SE2-100	1"	100	500
SE2-125	1-1/4"	100	500
SE2-150	1-1/2"	50	500
SE2-200	2"	50	500
SU2-250	2-1/2"	25	100
SU2-300	3"	25	100
SU2-350	3-1/2"	25	100
SU2-400	4"	25	100



1/2" to 2"



2-1/2" to 4"

STAMPED STEEL 1-HOLE RIGID STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for EMT and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SR1-50	1/2"	100	1000
SR1-75	3/4"	100	1000
SR1-100	1"	100	500
SR1-125	1-1/4"	100	500
SR1-150	1-1/2"	50	500
SR1-200	2"	50	500
SU1-250	2-1/2"	25	100
SU1-300	3"	25	100
SU1-350	3-1/2"	25	100
SU1-400	4"	25	100



1/2" to 2"



2-1/2" to 4"



D66 | Straps, Clamps and Hangers



STAMPED STEEL

2-HOLE RIGID STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Sizes 2-1/2" to 4" are also listed for EMT and IMC Conduits

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SR2-50	1/2"	100	1000
SR2-75	3/4"	100	1000
SR2-100	1"	100	500
SR2-125	1-1/4"	100	500
SR2-150	1-1/2"	50	500
SR2-200	2"	50	500
SU2-250	2-1/2"	25	100
SU2-300	3"	25	100
SU2-350	3-1/2"	25	100
SU2-400	4"	25	100



1/2" to 2"

2-1/2" to 4"

STAMPED STEEL

1-HOLE RG6U CABLE STRAP

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Description	Std. Pkg.	Master Ctn.
S1-25	RG6U (Coaxial Cable) 1-Hole Strap	100	1000



STAMPED STEEL

1-HOLE MC(BX) CABLE STRAP

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
S1-38	12-2, 12-3, 10-2, 10-3 MC (BX) 1-Hole Strap	100	1000



STAMPED STEEL

1-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES1-50	Three #8, #6, #4	100	500
SES1-75	Three #3, #2	100	500
SES1-100	Three #1, #1/0, #2/0	50	250
SES1-200	Three #3/0, #4/0	25	250



STAMPED STEEL

2-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES2-50	Three #8, #6, #4	20	100
SES2-75	Three #3, #2	20	100
SES2-100	Three #1, #1/0, #2/0	20	100
SES2-200	Three #3/0, #4/0	20	100



MALLEABLE IRON 1-HOLE RIGID STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SRM1-50	1/2"	100	1000
SRM1-75	3/4"	50	500
SRM1-100	1"	25	250
SRM1-125	1-1/4"	20	200
SRM1-150	1-1/2"	10	100
SRM1-200	2"	10	50
SRM1-250	2-1/2"	-	25
SRM1-300	3"	-	25
SRM1-350	3-1/2"	-	10
SRM1-400	4"	-	10



MALLEABLE IRON CLAMP BACK SPACERS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CBS-50	1/2"	25	250
CBS-75	3/4"	25	250
CBS-100	1"	25	250
CBS-125	1-1/4"	10	100
CBS-150	1-1/2"	10	100
CBS-200	2"	5	50
CBS-250	2-1/2"	-	25
CBS-300	3"	-	10
CBS-350	3-1/2"	-	10
CBS-400	4"	-	10



STAMPED STEEL NAIL STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc

NOTES

- ▶ Varies according to sizes

Cat. No.	EMT Size	Flex/Rigid Size	Std. Pkg.	Master Ctn.
NS-50	1/2"	3/8"	100	1000
NS-50/75	3/4"	1/2"	100	1000
NS-100	1"	3/4"	100	1000



PRE-GALVANIZED STEEL STUD MOUNTING CABLE SUPPORT

PRODUCT FEATURES

- ▶ Wood or Metal Stud
- ▶ Easy to Lock
- ▶ Space Saving Packaging

Cat. No.	Description	Non-Metallic	MC/AC/BX	Std. Pkg.
CS-CJ6	Stud Mounting Cable Support with locking tab	Max. 6	Max. 4	100



D68 | Straps, Clamps and Hangers



STAMPED STEEL UNIVERSAL STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Listed for EMT, IMC and Rigid **ST-50 to ST-200:**
- ▶ Break-apart design without Nut
- ▶ Improved Screw Hole Threads in 2024
- ▶ **STN-50 to STN-200 & ST-250 to ST-400:**
- ▶ Two-piece design with Nut

Cat. No. With Nut	Cat. No. Without Nut	Trade Size	Std. Pkg.
STN-50	ST-50	1/2"	100
STN-75	ST-75	3/4"	100
STN-100	ST-100	1"	100
STN-125	ST-125	1-1/4"	100
STN-150	ST-150	1-1/2"	50
STN-200	ST-200	2"	50
ST-250		2-1/2"	50
ST-300		3"	25
ST-350		3-1/2"	25
ST-400		4"	25



STN-50 to STN-200
ST-250 to ST-400



ST-50 to ST-200

STAMPED STEEL SADDLE TYPE STRUT CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Tri-Combo Hex Screw Head
- ▶ Wide Saddle Design

Cat. No.	EMT/Rigid/FMC Conduit Size	Cable O.D. Range	Std. Pkg.
STS-50	5/16" - 1/2"	0.260" - 0.890"	100
STS-75	3/4"	0.670" - 1.090"	100
STS-100	1"	0.890" - 1.450"	100
STS-125	1-1/4"	1.150" - 1.700"	50
STS-150	1-1/2"	1.350" - 2.000"	50
STS-200	2"	1.875" - 2.570"	50
STS-250	2-1/2"	2.500" - 3.060"	25
STS-300	3"	3.000" - 3.600"	25
STS-350	3-1/2"	3.600" - 4.100"	25
STS-400	4"	4.100" - 4.700"	25



STAMPED STEEL CONDUIT HANGERS WITH BOLTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	EMT Size	Rigid Size	Std. Pkg.	Master Ctn.
PH-50B	#0B	1/2"	1/2" & 3/8"	50	500
PH-75B	#1B	3/4"	3/4"	50	500
PH-100B	#2B	1"	1"	25	250
PH-105B	#2-1/2B	1-1/4"	-	25	250
PH-125B	#3B	1-1/2"	1-1/4"	50	250
PH-150B	#4B	-	1-1/2"	50	250
PH-200B	#5B	2"	2"	20	100
PH-250B	#6B	2-1/2"	2-1/2"	10	50
PH-300B	#7B	3"	3"	10	50
PH-350B	#8B	3-1/2"	3-1/2"	10	50
PH-400B	#9B	4"	4"	5	25



STEEL BEAM CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Single Screw
- ▶ 2 Threaded Holes



Cat. No.	Description	Std. Pkg.	Master Ctn.
BC-25	1/4"-20 Tap, 11/16" Jaw, 100 lb. Load	50	250
BC-38	3/8"-16 Tap, 7/8" Jaw, 200 lb. Load	25	100



MALLEABLE IRON BEAM CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Single Screw
- ▶ 2 Threaded Holes



Cat. No.	Description	Std. Pkg.	Master Ctn.
BCM-25	1/4"-20 Tap, 3/4" Jaw, 125 lb. Load	50	250
BCM-38	3/8"-16 Tap, 7/8" Jaw, 300 lb. Load	25	100
BCM-50	1/2"-13 Tap, 1" Jaw, 600 lb. Load	10	50




MALLEABLE IRON CONDUIT CLAMPS EDGE TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCE-50	1/2"	50
MCCE-75	3/4"	50
MCCE-100	1"	25
MCCE-125	1-1/4"	25
MCCE-150	1-1/2"	25
MCCE-200	2"	25
MCCE-250	2-1/2"	10
MCCE-300	3"	10

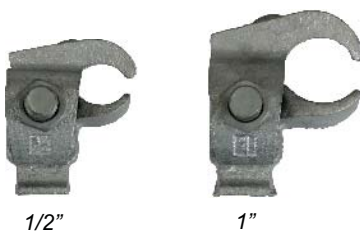

1/2"

1"

MALLEABLE IRON CONDUIT CLAMPS RIGHT ANGLE TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCR-50	1/2"	50
MCCR-75	3/4"	50
MCCR-100	1"	50
MCCR-125	1-1/4"	50
MCCR-150	1-1/2"	50
MCCR-200	2"	50
MCCR-250	2-1/2"	25
MCCR-300	3"	25
MCCR-350	3-1/2"	25
MCCR-400	4"	25



1/2"

1"



D70 | Straps, Clamps and Hangers




MALLEABLE IRON CONDUIT CLAMPS PARALLEL TYPE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
MCCP-50	1/2"	50
MCCP-75	3/4"	50
MCCP-100	1"	50
MCCP-125	1-1/4"	25
MCCP-150	1-1/2"	25
MCCP-200	2"	25
MCCP-250	2-1/2"	10
MCCP-300	3"	10
MCCP-350	3-1/2"	10
MCCP-400	4"	10

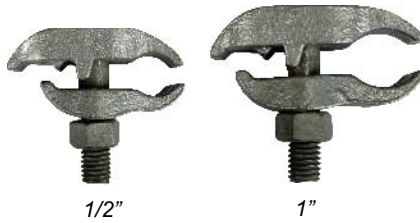

STEEL U-BOLTS WITH HEX NUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Unified Coarse Thread

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SUB-50	1/2"	25	250
SUB-75	3/4"	25	250
SUB-100	1"	25	250
SUB-125	1-1/4"	20	200
SUB-150	1-1/2"	20	200
SUB-200	2"	20	200
SUB-250	2-1/2"	-	10
SUB-300	3"	-	10
SUB-350	3-1/2"	-	10
SUB-400	4"	-	10



STEEL FIXTURE HANGERS

Cat. No.	For Use With	Mount Position	Std. Pkg.	Master Ctn.
FH-E	2, 3, or 4 Light Fixtures	End Mount	100	500
FH-S	2, 3, or 4 Light Fixtures	Side Mount	100	500



STEEL HANGER SCREW WITH SINGLE HOLE

PRODUCT FEATURES

- ▶ Wood Screw Thread

Cat. No.	Description	Dimension	Std. Pkg.	Master Ctn.
H-SCREW	Flat Hanger Screw	1/4" x 3"	100	500



COPPER-FREE ALUMINUM SERVICE ENTRANCE CAPS CLAMP TYPE

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
EC-50	1/2"	15	90
EC-75	3/4"	10	60
EC-100	1"	7	42
EC-125	1-1/4"	5	30
EC-150	1-1/2"	4	24
EC-200	2"	4	8
EC-250	2-1/2"	1	3
EC-300	3"	1	3
EC-300L (Large Body)	3"	1	3
EC-350	3-1/2"	1	2
EC-400	4"	1	2



HEAVY-DUTY PVC SERVICE ENTRANCE HEADS

PRODUCT FEATURES

- ▶ Snap-on Covers

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
*ECP-50	1/2"	5	10
*ECP-75	3/4"	2	10
*ECP-100	1"	2	10
*ECP-125	1-1/4"	-	5
*ECP-150	1-1/2"	2	10



HEAVY-DUTY PVC SERVICE ENTRANCE CABLE CAPS

PRODUCT FEATURES

- ▶ Snap-on Covers

Cat. No.	Description	Std. Pkg.
ECCP-50	#8, #6, #4, #2	10
ECCP-100	#1/0, #2/0	10
ECCP-200	#3/0, #4/0	10



STAMPED STEEL 1-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-Resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES1-50	Three #8, #6, #4	100	500
SES1-75	Three #3, #2	100	500
SES1-100	Three #1, #1/0, #2/0	50	250
SES1-200	Three #3/0, #4/0	25	250



STAMPED STEEL 2-HOLE SERVICE ENTRANCE STRAPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Corrosion-Resistant

Cat. No.	Description	Std. Pkg.	Master Ctn.
SES2-50	Three #8, #6, #4	20	100
SES2-75	Three #3, #2	20	100
SES2-100	Three #1, #1/0, #2/0	20	100
SES2-200	Three #3/0, #4/0	20	100




D72 | Service Entrance

DIE CAST COPPER-FREE ALUMINUM THREADED SERVICE ENTRANCE CONDUIT BODIES "SLB" SERIES


PRODUCT FEATURES

- ▶ With Die Cast Cover and Neoprene Gasket
- ▶ Gray color



SLB

Cat. No.	Trade Size	DIMENSIONS - SLB SERIES			Std. Pkg.
		A	B	C	
SLB-50	1/2"	1-5/8"	1-3/8"	3-9/32"	20
SLB-75	3/4"	1-27/32"	1-9/16"	3-19/32"	20
SLB-100	1"	2-1/8"	1-31/32"	4-5/16"	10
SLB-125	1-1/4"	2-19/32"	2-7/16"	5-9/16"	10
SLB-150	1-1/2"	2-19/32"	2-5/8"	6-1/4"	6
SLB-200	2"	3-1/8"	3-1/8"	6-3/4"	3



ZINC DIE CAST WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

PRODUCT FEATURES

- ▶ Watertight



Cat. No.	Trade Size	Wire Size	Grommet Opening	Std. Pkg.	Master Ctn.
WECC-100-8	1"	#8	0.40" - 0.68"	10	100
WECC-100-6	1"	#6	0.44" - 0.70"	10	100
WECC-100-4	1"	#4	0.52" - 0.84"	10	100
WECC-125-3	1-1/4"	#3	0.56" - 0.92"	10	50
WECC-125-2	1-1/4"	#2	0.60" - 1.00"	10	50
WECC-125-1	1-1/4"	#1	0.65" - 1.09"	10	50
WECC-150-10	1-1/2"	#1/0	0.72" - 1.24"	5	50
WECC-150-20	1-1/2"	#2/0	0.86" - 1.34"	5	50
WECC-150-30	1-1/2"	#3/0	0.87" - 1.37"	5	50
WECC-200-10	2"	#1/0	0.72" - 1.24"	5	25
WECC-200-20	2"	#2/0	0.86" - 1.34"	5	25
WECC-200-30	2"	#3/0	0.87" - 1.34"	5	25
WECC-200-40	2"	#4/0	0.90" - 1.50"	5	25
WECC-200-40N	2"	#4/0	1.11" - 1.73"	5	25

ZINC DIE CAST NON-METALLIC CABLE CONNECTORS

NOTE

- ▶ Sizes 1" to 2" are also suitable for service entrance



Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
RX-50	(1) 14/2 to 10/2 NM, (2) 14/2 or (2) 12/2 NM, 0.340" to 0.380" Dia. Flex Cord (Dry Location) 14/3, 16/2, and 16/3 SJO	1/2"	100	1000
RX-75	(2) 14-2 NM, AWG, 0.340" to 0.515" Dia. Flex Cord (Dry Location) 14/3, 14/2 SJO	3/4"	25	250

For Service Entrance

Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
RX-100	(4) 14/2, (1) 8/3, 8/2, 6/2, 6/3, 4/2, 4/3 NM (1) 2 SE Cable	1"	10	100
RX-125	4/3 or 2/3 NM	1-1/4"	5	50
RX-150	3-2/0 or 3-4/0 NM	1-1/2"	5	50
RX-200	3-2/0 or 3-4/0 NM	2"	5	50

DIE CAST ALUMINUM METER HUBS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Rain-tight



Cat. No.	Trade Size	Std. Pkg.
AMH-100	1"	10
AMH-125	1-1/4"	10
AMH-150	1-1/2"	10
AMH-200	2"	10
AMH-250	2-1/2"	10

24GA GALVANIZED STEEL ROOF JACKS

PRODUCT FEATURES

- ▶ Uninsulated
- ▶ For service entrance conduit or ventilation pipe
- ▶ Fits Flat to 40°



Cat. No.	Trade Size	Std. Pkg.
RJ-50	1/2"	24
RJ-75	3/4"	24
RJ-100	1"	24
*RJ-125	1-1/4"	24
RJ-150	1-1/2"	24
*RJ-200	2"	24
*RJ-300	3"	12
RJ-400	4"	12

* 26GA Galvanized Steel; Fits Flat to 22.6° (5/12 Pitch)



24GA GALVANIZED STEEL ROOF FLASHING WITH SEAL

PRODUCT FEATURES

- ▶ Neoprene Seal
- ▶ Fits Flat to 40°
- ▶ For Service Entrance Conduit or Ventilation Pipe



Cat. No.	Trade Size	Std. Pkg.
RFS-125/150 NEW	1-1/4" to 1-1/2"	25
RFS-200 NEW	2"	25
RFS-250 NEW	2-1/2"	25



SERVICE ENTRANCE WEDGE GRIP CLAMPS

PRODUCT FEATURES

- ▶ Designed to make quick sag adjustments
- ▶ For use with ACSR, AAC, AAAC service cables
- ▶ Aluminum Body
- ▶ Stainless Steel Solid Bail

Cat. No.	ACSR Wire Size	Std. Pkg.	Master Ctn.
SEWG-1	#6 - #2	10	50
SEWG-2	#4 - 1/0	5	25
SEWG-3	2/0 - 4/0	5	25



PORCELAIN WIRE HOLDERS

PRODUCT FEATURES

- ▶ Porcelain & Galvanized Steel
- ▶ Varies according to sizes

Cat. No.	Description	Std. Pkg.	Master Ctn.
PWH-L	With 3/8" x 2-1/4" Lag Bolt	5	20
PWH-M	With Steel Clip for 1-1/4" to 3" Mast	5	20



PWH-L



PWH-M

D74 | Bushings, Locknuts and Washers



MACHINED STEEL REDUCING BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RB-50/38	1/2" to 3/8"	100	500
RB-75/50	3/4" to 1/2"	100	500
RB-100/50	1" to 1/2"	50	250
RB-100/75	1" to 3/4"	50	250
RB-125/50	1-1/4" to 1/2"	20	100
RB-125/75	1-1/4" to 3/4"	20	100
RB-125/100	1-1/4" to 1"	20	100
RB-150/50	1-1/2" to 1/2"	10	50
RB-150/75	1-1/2" to 3/4"	10	50
RB-150/100	1-1/2" to 1"	10	50
RB-150/125	1-1/2" to 1-1/4"	10	50
RB-200/50	2" to 1/2"	10	50
RB-200/75	2" to 3/4"	10	50
RB-200/100	2" to 1"	10	50
RB-200/125	2" to 1-1/4"	10	50
RB-200/150	2" to 1-1/2"	10	50



MALLEABLE IRON REDUCING BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RB-250/200	2-1/2" to 2"	10	50
RB-300/200	3" to 2"	10	50
RB-300/250	3" to 2-1/2"	10	50
RB-350/250	3-1/2" to 2-1/2"	5	20
MRB-350/300	3-1/2" to 3"	5	20
MRB-400/350	4" to 3-1/2"	5	20



STEEL RIGID MALE ENLARGERS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Male Size	Female Size	Std. Pkg.	Master Ctn.
SME-50/75	1/2"	3/4"	25	250
SME-75/100	3/4"	1"	10	100
SME-100/125	1"	1-1/4"	10	100



SME-50/75



SME-100/125

PVC PLASTIC INSULATING BUSHINGS

PRODUCT FEATURES

- ▶ 105°C Rated
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PB-50	1/2"	100	1000
PB-75	3/4"	100	1000
PB-100	1"	50	500
PB-125	1-1/4"	25	250
PB-150	1-1/2"	25	250
PB-200	2"	10	100
PB-250	2-1/2"	10	100
PB-300	3"	-	20
PB-350	3-1/2"	-	20
PB-400	4"	-	10
PB-500	5"	-	10
PB-600	6"	-	10



ZINC DIE CAST CONDUIT BUSHINGS

PRODUCT FEATURES

- ▶ Full Machine-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CB-50	1/2"	100	1000
CB-75	3/4"	50	500
CB-100	1"	50	500
CB-125	1-1/4"	25	250
CB-150	1-1/2"	25	250
CB-200	2"	15	90
CB-250	2-1/2"	2	10
CB-300	3"	2	10
CB-350	3-1/2"	-	5
CB-400	4"	-	5



ZINC DIE CAST CONDUIT BUSHINGS INSULATED

PRODUCT FEATURES

- ▶ Full Machine-Cut Internal Threads
- ▶ Insulated Throat
- ▶ Meets Federal Spec. A-A-50553

NOTE

- ▶ Insulated color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
CBI-50	1/2"	100	1000
CBI-75	3/4"	50	500
CBI-100	1"	50	500
CBI-125	1-1/4"	25	250
CBI-150	1-1/2"	25	250
CBI-200	2"	15	90
CBI-250	2-1/2"	2	10
CBI-300	3"	2	10
CBI-350	3-1/2"	-	5
CBI-400	4"	-	5



MALLEABLE IRON INSULATED CONDUIT BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 105°C rated insulated throat

NOTE

- ▶ Insulated color may vary



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCBI-50	1/2"	100	1000
MCBI-75	3/4"	50	500
MCBI-100	1"	50	500
MCBI-125	1-1/4"	25	250
MCBI-150	1-1/2"	25	100
MCBI-200	2"	10	100
MCBI-250	2-1/2"	-	50
MCBI-300	3"	-	25
MCBI-350	3-1/2"	-	25
MCBI-400	4"	-	10
MCBI-500	5"	-	10
MCBI-600	6"	-	10



3/4"



1-1/4"



D76 | Bushings, Locknuts and Washers



ZINC DIE CAST GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ 105°C rated Throat Insulator



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
GBLL-50	1/2"	#14 - #4	50	500
GBLL-75	3/4"	#14 - #4	40	400
GBLL-100	1"	#14 - #4	15	150
GBLL-125	1-1/4"	#14 - #4	15	150
GBLL-125-10	1-1/4"	#14 - #1/0	20	200
GBLL-150	1-1/2"	#14 - #4	10	100
GBLL-150-10	1-1/2"	#14 - #1/0	10	100
GBLL-200	2"	#14 - #4	5	50
GBLL-200-10	2"	#14 - #1/0	10	100
GBLL-250	2-1/2"	#6 - #250MCM	5	50
GBLL-250-10	2-1/2"	#14 - #1/0	-	50
GBLL-300	3"	#6 - #250MCM	5	50
GBLL-300-10	3"	#14 - #1/0	-	50
GBLL-350	3-1/2"	#6 - #250MCM	4	40
GBLL-350-10	3-1/2"	#14 - #1/0	-	10
GBLL-400	4"	#6 - #250MCM	4	40
GBLL-400-10	4"	#14 - #1/0	-	10

Electrical Fittings

MALLEABLE IRON GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Full Machine-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Lug Range	Std. Pkg.	Master Ctn.
MGBLL-50	1/2"	#14 - #4	50	200
MGBLL-75	3/4"	#14 - #4	25	100
MGBLL-100	1"	#14 - #4	25	100
MGBLL-125	1-1/4"	#14 - #4	10	50
MGBLL-125-10	1-1/4"	#14 - #1/0	20	200
MGBLL-150	1-1/2"	#14 - #4	10	50
MGBLL-150-10	1-1/2"	#14 - #1/0	10	100
MGBLL-200	2"	#14 - #4	10	50
MGBLL-200-10	2"	#14 - #1/0	10	100
MGBLL-250	2-1/2"	#6 - #250MCM	5	25
MGBLL-250-10	2-1/2"	#14 - #1/0	-	50
MGBLL-300	3"	#6 - #250MCM	5	25
MGBLL-300-10	3"	#14 - #1/0	-	25
MGBLL-350	3-1/2"	#6 - #250MCM	-	5
MGBLL-350-10	3-1/2"	#14 - #1/0	-	10
MGBLL-400	4"	#6 - #250MCM	-	5
MGBLL-400-10	4"	#14 - #1/0	-	10
MGBLL-500	5"	#6 - #250MCM	-	5
MGBLL-500-30	5"	#6 - #3/0	-	5
MGBLL-600	6"	#6 - #250MCM	-	5
MGBLL-600-30	6"	#6 - #3/0	-	5

STEEL FLEX BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Used to insulate cut Flex when the conduit is used for data cables without a junction box

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
FB-50	1/2"	100	1000
FB-75	3/4"	100	500
FB-100	1"	25	250



Shown Installed

PLASTIC EMT BUSHINGS

PRODUCT FEATURES

- ▶ Protects wires from damage by sharp edges of EMT
- ▶ Size 2-1/2" to 4" can also be used for Rigid, IMC and PVC conduit

NOTE

- ▶ Color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
TPB-50	1/2"	100	1000
TPB-75	3/4"	100	1000
TPB-100	1"	50	500
TPB-125	1-1/4"	25	250
TPB-150	1-1/2"	25	250
TPB-200	2"	10	100
TPB-250	2-1/2"	10	100
TPB-300	3"	-	20
TPB-350	3-1/2"	-	20
TPB-400	4"	-	10



PLASTIC NON-METALLIC CABLE QUICK-LOCK CONNECTORS

PRODUCT FEATURES

- ▶ Easy and fast installation
- ▶ Simply remove with screwdriver if necessary

Cat. No.	NM Cable Range	Trade Size	KO Size	Std. Pkg.	Master Ctn.
PQLC-38	14/2 - 10/3	3/8"	1/2"	100	1000
PQLC-75	14/3 - 6/3	3/4"	3/4"	50	500



PQLC-38




PQLC-75

PLASTIC UNIVERSAL METAL STUD GROMMET

PRODUCT FEATURES

- ▶ High Strength, non-conductive polypropylene
- ▶ Universal design fits into a standard 1" Trade Size hole and all factory-punched stud holes
- ▶ Lightweight material eases installation


Cat. No.	Description	Std. Pkg.
PUSG	Universal Snap-in type bushings for Metal Stud, fit all factory punched metal stud holes	100



INSTALLATION INSTRUCTION:

- Step1:** Separate the two halves
- Step2:** Snap the bushing end and the washer end together through the hole
- Step3:** Install cable through the grommet

COMMON HOLE SHAPES IN METAL STUDS:

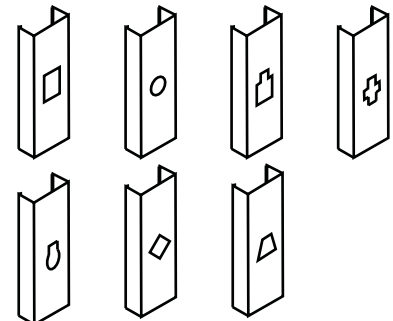

D78 | Bushings, Locknuts and Washers



ANTI-SHORT BUSHINGS THERMOPLASTIC

PRODUCT FEATURES

- ▶ High-Temperature Plastic
- ▶ Fits BX (AC) and Flex Conduits

Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
ASB-516	14/2, 14/3, 12/2	5/16"	35	3500
ASB-38	14/4, 12/3, 6/1, 4/1	3/8"	35	2100
ASB-716	12/4, 10/2, 10/3, 2/1	7/16"	35	700
ASB-50	10/4, 8/2, 8/3, 1/1	1/2"	20	400
ASB-75	8/4, 6/2, 4/2, 4/3, 6/4	3/4"	16	320



ZINC DIE CAST CONDUIT LOCKNUTS

PRODUCT FEATURES

- ▶ Full-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LN-50	1/2"	100	1000
LN-75	3/4"	100	1000
LN-100	1"	100	1000
LN-125	1-1/4"	50	500
LN-150	1-1/2"	50	500
LN-200	2"	25	250
LN-250	2-1/2"	10	100
LN-300	3"	5	50
LN-350	3-1/2"	5	50
LN-400	4"	-	25



STEEL CONDUIT LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Full-Cut Internal Threads
- ▶ Meets Federal Spec. A-A-50553

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SLN-50	1/2"	100	1000
SLN-75	3/4"	100	1000
SLN-100	1"	100	1000
SLN-125	1-1/4"	50	500
SLN-150	1-1/2"	50	500
SLN-200	2"	25	250
SLN-250	2-1/2"	10	100
SLN-300	3"	5	50
SLN-350	3-1/2"	5	50
SLN-400	4"	-	25
SLN-500	5"	-	10
SLN-600	6"	-	10



Electrical Fittings

STEEL SEALING LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Bonded with Molten Sealing Material
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SSLN-50	1/2"	100	1000
SSLN-75	3/4"	100	1000
SSLN-100	1"	100	1000
SSLN-125	1-1/4"	50	500
SSLN-150	1-1/2"	50	500
SSLN-200	2"	25	250
SSLN-250	2-1/2"	10	100
SSLN-300	3"	5	50
SSLN-350	3-1/2"	5	50
SSLN-400	4"	-	25
SSLN-500	5"	-	10
SSLN-600	6"	-	10

STEEL GROUNDING (BONDING) RIGID LOCKNUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
GL-50	1/2"	50	200
GL-75	3/4"	25	100
GL-100	1"	25	100
GL-125	1-1/4"	10	50
GL-150	1-1/2"	10	50
GL-200	2"	10	50
GL-250	2-1/2"	5	25
GL-300	3"	5	25
GL-350	3-1/2"	-	5
GL-400	4"	-	5
GL-500	5"	-	5
GL-600	6"	-	5

NYLON PLASTIC LOCKNUT

PRODUCT FEATURES

- ▶ Full-cut internal threads
- ▶ Meets Federal Spec. A-A-50553



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
PLN-38	3/8"	50	-
PLN-50	1/2"	50	-
PLN-75	3/4"	50	-
PLN-100	1"	100	-

STEEL LIQUID TIGHT SEALING RINGS

PRODUCT FEATURES

- ▶ Neoprene Rubber Gasket
- ▶ Steel Retainer
- ▶ Form Liquid tight seal between connector and box



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
LTSR-50	1/2"	250	2500
LTSR-75	3/4"	200	2000
LTSR-100	1"	150	1500
LTSR-125	1-1/4"	100	1000
LTSR-150	1-1/2"	50	500
LTSR-200	2"	50	500
LTSR-250	2-1/2"	-	100
LTSR-300	3"	-	100
LTSR-350	3-1/2"	-	50
LTSR-400	4"	-	50



D80 | Bushings, Locknuts and Washers



GALVANIZED STAMPED STEEL REDUCING WASHERS

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
RW-75/50	3/4" to 1/2"	250	1000
RW-100/50	1" to 1/2"	250	1000
RW-100/75	1" to 3/4"	250	1000
RW-125/50	1-1/4" to 1/2"	100	400
RW-125/75	1-1/4" to 3/4"	100	400
RW-125/100	1-1/4" to 1"	100	400
RW-150/50	1-1/2" to 1/2"	-	100
RW-150/75	1-1/2" to 3/4"	-	100
RW-150/100	1-1/2" to 1"	-	100
RW-150/125	1-1/2" to 1-1/4"	-	100
RW-200/50	2" to 1/2"	-	50
RW-200/75	2" to 3/4"	-	50
RW-200/100	2" to 1"	-	50
RW-200/125	2" to 1-1/4"	-	50
RW-200/150	2" to 1-1/2"	-	50
RW-250/50	2-1/2" to 1/2"	25	100
RW-250/75	2-1/2" to 3/4"	25	100
RW-250/100	2-1/2" to 1"	25	100
RW-250/125	2-1/2" to 1-1/4"	25	100
RW-250/150	2-1/2" to 1-1/2"	25	100
RW-250/200	2-1/2" to 2"	25	100
RW-300/50	3" to 1/2"	-	25
RW-300/75	3" to 3/4"	-	25
RW-300/100	3" to 1"	-	25
RW-300/125	3" to 1-1/4"	-	25
RW-300/150	3" to 1-1/2"	-	25
RW-300/200	3" to 2"	-	25
RW-300/250	3" to 2-1/2"	-	25
RW-350/50	3-1/2" to 1/2"	-	10
RW-350/75	3-1/2" to 3/4"	-	10
RW-350/100	3-1/2" to 1"	-	10
RW-350/125	3-1/2" to 1-1/4"	-	10
RW-350/150	3-1/2" to 1-1/2"	-	10
RW-350/200	3-1/2" to 2"	-	10
RW-350/250	3-1/2" to 2-1/2"	-	10
RW-350/300	3-1/2" to 3"	-	10
RW-400/50	4" to 1/2"	-	10
RW-400/75	4" to 3/4"	-	10
RW-400/100	4" to 1"	-	10
RW-400/125	4" to 1-1/4"	-	10
RW-400/150	4" to 1-1/2"	-	10
RW-400/200	4" to 2"	-	10
RW-400/250	4" to 2-1/2"	-	10
RW-400/300	4" to 3"	-	10
RW-400/350	4" to 3-1/2"	-	10

Electrical Fittings



STAMPED STEEL SNAP-IN KNOCKOUT SEALS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Held by spring tension
- ▶ For capping unused knockout holes

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
KO-50	1/2"	100	1000
KO-75	3/4"	100	1000
KO-100	1"	100	500
KO-125	1-1/4"	50	100
KO-150	1-1/2"	-	50
KO-200	2"	-	25



STAMPED STEEL THREE-PIECE KNOCKOUT SEALS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ For capping unused knockout holes
- ▶ Embossed for quick self centering
- ▶ Installed using the screw and back strap

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
KO3P-50	1/2"	100	500
KO3P-75	3/4"	50	500
KO3P-100	1"	25	500
KO3P-125	1-1/4"	25	250
KO3P-150	1-1/2"	10	300
KO3P-200	2"	10	300
KO3P-250	2-1/2"	10	100
KO3P-300	3"	10	100
KO3P-350	3-1/2"	10	100
KO3P-400	4"	10	100



STEEL REGULAR SPRING NUTS

PRODUCT FEATURES

- ▶ Electroplated Zinc

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SNR-1420	1/4" - 20	100	600
SNR-3816	3/8" - 16	100	600
SNR-1213	1/2" - 13	100	600



SNR-1420



SNR-3816



SNR-1213

STEEL JACK CHAIN

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 25 lbs. Max. Load
- ▶ In Steel Reel

Cat. No.	Trade Size	Std. Pkg.
JC-12	12GA	100





SCREW KITS, PLASTIC ANCHOR KIT, & EASY ANCHOR KIT

PRODUCT FEATURES

- ▶ In Plastic Partition Kits

Cat. No.	Description	Trade Size	Screw Count/Kit	Std. Pkg.
*KIT-832RH	8-32 Round Head, 1/2" to 2", Slot/Phillips	#8-32	370	10
KIT-10PAK	#10 x 1" Screws & Plastic Anchors, with Masonry Drill Bit	#10 x 1"	110	10
KIT-8EZ	#8 x 1-1/2" Zinc Dry Wall Easy Anchor Kit	#8 x 1-1/2"	50	10
KIT-1032TC	#10 x 1-1/4" Tri-Combo Screw (Hex/Phillips/Slot) Self-Tapping Screw & #8-10 x 1-1/4" Anchors (One 1/4" Masonry drill bit)	#10-32 x 1-1/4"	100	10

Machine Screw Kits Screw Count

Size	Qty.
1/2"	100
3/4"	75
1"	75
1-1/4"	50
1-1/2"	40
2"	30
Total	370



KIT-832RH



KIT-10PAK



KIT-8EZ



KIT-1032TC

STEEL BEAM CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Single Screw
- ▶ 2 Threaded Holes



Cat. No.	Description	Std. Pkg.	Master Ctn.
BC-25	1/4"-20 Tap, 11/16" Jaw, 100 lb. Load	50	250
BC-38	3/8"-16 Tap, 7/8" Jaw, 200 lb. Load	25	100

MALLEABLE IRON BEAM CLAMPS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Single Screw
- ▶ 2 Threaded Holes



Cat. No.	Description	Std. Pkg.	Master Ctn.
BCM-25	1/4"-20 Tap, 3/4" Jaw, 125 lb. Load	50	250
BCM-38	3/8"-16 Tap, 7/8" Jaw, 300 lb. Load	25	100
BCM-50	1/2"-13 Tap, 1" Jaw, 600 lb. Load	10	50



STEEL "S" HOOK

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ 25 lbs. Max. Load

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SH-2	12GA, 1-1/4"	100	1000



STEEL HANGER SCREW WITH SINGLE HOLE

PRODUCT FEATURES

- ▶ Wood Screw Thread

Cat. No.	Description	Dimension	Std. Pkg.	Master Ctn.
H-SCREW	Flat Hanger Screw	1/4" x 3"	100	500



STEEL FIXTURE HANGERS

Cat. No.	For Use With	Mount Position	Std. Pkg.	Master Ctn.
FH-E	2, 3, or 4 Light Fixtures	End Mount	100	500
FH-S	2, 3, or 4 Light Fixtures	Side Mount	100	500



SERVICE ENTRANCE WEDGE GRIP CLAMPS

PRODUCT FEATURES

- ▶ Designed to make quick sag adjustments.
- ▶ For use with ACSR, AAC, AAAC Service cables
- ▶ Aluminum Body
- ▶ Stainless Steel Solid Bail

Cat. No.	ACSR Wire Size	Std. Pkg.	Master Ctn.
SEWG-1	#6 - #2	10	50
SEWG-2	#4 - 1/0	5	25
SEWG-3	2/0 - 4/0	5	25




PORCELAIN WIRE HOLDERS

PRODUCT FEATURES

- ▶ Porcelain & Galvanized Steel
- ▶ Varies According to Sizes

Cat. No.	Description	Trade Size	Std. Pkg.	Master Ctn.
PWH-L	With 2-1/4" Lag Bolt	2-3/4"	5	20
PWH-M	With Steel Clip for 1-1/4" to 3" Mast	1-1/4" to 3"	5	20

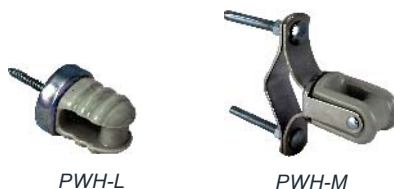



BLACK ANNEALED STEEL TIE WIRE

PRODUCT FEATURES

- ▶ 16-1/2GA

Cat. No.	Description	Trade Size	Std. Pkg.
TW	Tie Wire	16GA, 400'	20



MALLEABLE IRON RIGID FLOOR FLANGES

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.
FR-50	1/2"	50
FR-75	3/4"	50
FR-100	1"	50
FR-125	1-1/4"	25
FR-150	1-1/2"	25
FR-200	2"	25



MALLEABLE IRON CONCRETE SLAB INSERTS STRAIGHT

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCSI-50	1/2"	10	100
MCSI-75	3/4"	10	100
MCSI-100	1"	10	50



MALLEABLE IRON CONCRETE SLAB INSERTS 90° ANGLE

PRODUCT FEATURES

- ▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
MCSI90-50	1/2"	10	100
MCSI90-75	3/4"	10	100
MCSI90-100	1"	10	50

