

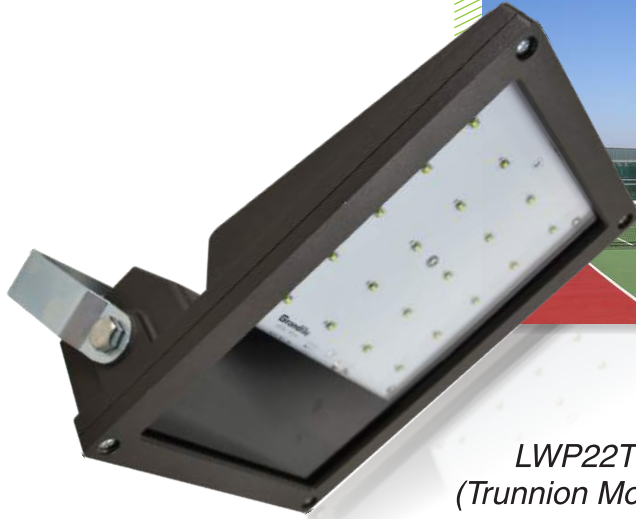


LWP22 Series

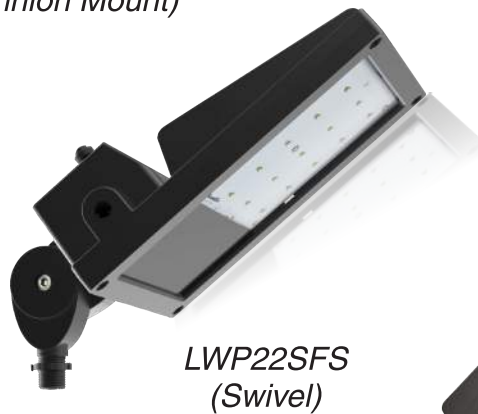

LWP22T
(Trunnion Mount)

“ 46W fixture equivalent to
150-200W metal halide ”



LWP22SFS
(Swivel)



LWP22SFB
(Slip-Fitter)

The versatile LWP22 floodlight can be used in outdoor commercial applications such as parking areas, outdoor recreational areas, or warehouses.

PRODUCT FEATURES

- 120~277V
- UL Listed For Wet Location
- Die Cast Aluminum Housing
- UV Resistant Bronze Powder Coat Finish
- Operating Temp:
-40°C to +25°C (-40°F to +77°F)
- 50,000 life hours
- Polycarbonate Lens with Weatherproof Gasket
- 5 Year Warranty

Catalog Number	System Wattage	# of LEDs	Efficacy	Color Temperature	Emission Color	Lumens	CRI
LWP22T-46W-CW-BR	49.5W	20	78 lm/W	4700K	Cool White	3846 lm	75+
LWP22SFS-46W-CW-BR	49.5W	20	78 lm/W	4700K	Cool White	3846 lm	75+
LWP22SFB-46W-CW-BR	49.5W	20	78 lm/W	4700K	Cool White	3846 lm	75+



CREE
LEDs



LM79

