



# Ceiling Ventilation Fan

Model: OE 70  
70 CFM - 3.5 Sone

## FEATURES and BENEFITS:

### Housing

- Heavy duty galvanized steel housing
- Mounting tabs for easy installation
- 4" exhaust pipe connection
- Effortless side electrical connection
- Termination damper to prevent cold air infiltration
- Light, durable and sturdy

### Blower and Motor

- Power rating of 120 volts and 60 hz
- Effortless snap in wiring connection
- UL and CUL listed for tub/shower enclosure when connected to a GFCI protected branch circuit
- Quick installation of motor and impeller assembly
- Permanently lubricated motor
- Energy efficient motor

### Grille

- Contemporary design
- Durable white ABS
- Gloss finish for "quick wipe" cleaning
- Slide in torsion spring installation

### Packaging

- Single Pack - complete fan per box
- Multi-pack - housing only 6 per box
- Multi-pack - fan & grille only 6 per box

### Warranty

- 1 year limited warranty on parts



Grille



← 8 3/4" square →

Housing & motor



← 7 3/4" square →


Motor



Housing



## ENERGY EFFICIENT Dependability.

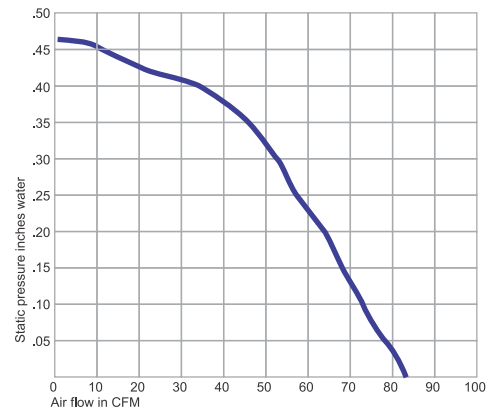

OE70		4" Duct	
HVI Certified Data	Static Pressure	inches w.g.	0.1
	Air Volume	CFM	70
	Noise	Sone	3.5
	Power Consumption	Watts	27.1
	Energy Efficiency	CFM/Watts	2.67
	Speed	RPM	1,223
	Current	Amps	.24
Power Rating	V/Hz.	120/60	

Model #	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: