

ESLN4M


MICRO WET LOCATION LED EXIT SIGN

PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation (Except 2C models)
- ▶ UL Listed for Wet Location (-10°C - 40°C)
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation (**EB Only**)
- ▶ Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- ▶ Fully Gasketed Corrosion-Resistant Enclosure
- ▶ High-Impact Clear Polycarbonate Lens
- ▶ Universal Mounting Plate
- ▶ Canopy for ceiling or end mounting included
- ▶ Easy Snap-out Chevrons Directional Indicators
- ▶ Sealed Push-to-Test Switch
- ▶ Maintenance-free 6V NiCd Battery (**EB Only**)
- ▶ Fully automatic operation (**EB Only**)



ESLN4M-W-1-G

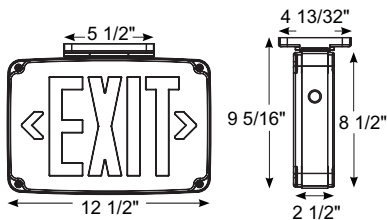

Cat. No.	Housing Color	No. of Faces	Letter Color	Operation	Options
ESLN4M	W (White)	1	R (Red)	EB (Battery Back-Up) AC (AC Only)	SDT (Self Diagnostic Test) 2C-120 (Dual-Circuit Op., 120V) 2C-277 (Dual-Circuit Op., 277V)
	B (Black) GY (Grey)	2	G (Green)		

EESL2L

MICRO WET LOCATION LED EMERGENCY LIGHT/EXIT SIGN COMBO UNIT


PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation
- ▶ UL Listed for Wet Location (-20°C ~ 50°C)
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ Round fully adjustable LED Lamp Heads (1W per lamp head)
- ▶ 90 Minutes Minimum Emergency Operation
- ▶ Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- ▶ Fully Gasketed Corrosion-Resistant Enclosure
- ▶ High-Impact Clear Polycarbonate Lens
- ▶ Universal Mounting Plate
- ▶ Easy Snap-out Chevrons Directional Indicators
- ▶ Sealed Push-to-Test Switch
- ▶ White housing only
- ▶ Maintenance-free 3.6V NiCd Battery
- ▶ Fully automatic operation
- ▶ RC option offers additional 3W for 90 min.

NEW



EESL2L-R

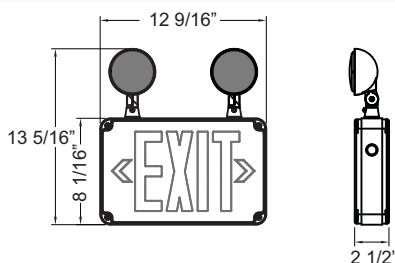

Cat. No.	Letter Color	No. of Faces	Options
EESL2L	R (Red)	1	SDT (Self Diagnostic Test) RC (Remote Capacity) HTR (Internal Heater)
	G (Green)	2	

Exit & Emergency