LWP2 SERIES

PRODUCT FEATURES

- 120~277V
- UL Listed for Wet Location
- Die Cast Aluminum Housing
- UV Resistant Bronze Powder Coat Finish
- Prismatic Borosilicate Molded Glass Lens with Weatherproof Gasket
- 120° Beam Angle
- Type IV Distribution
- Ambient Operating Temp: -20°C / -4°F to 40°C / 104°F
- 50,000 Life Hours
- Photocell Optional (Pg.I18)
- 5 Year Limited Warranty
- Dimmable to 10% **(80W-120W only)**

CUT-OFF SHROUDS

- **LWP2-S**: For 50W/80W
- **LWP2-120W-S**: For 120W

LWP2-30W

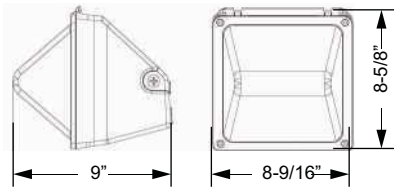

LWP2-50W/80W

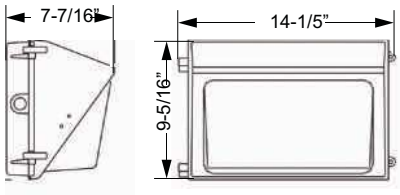

LWP2-120W

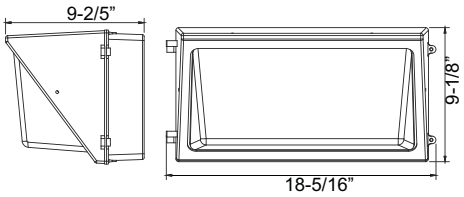

Catalog No.	System Wattage	Efficacy	Color Temp.	BUG Rating	Lumens	CRI	Wattage Equiv.
LWP2-30W-WW	30W	86 lm/W	3000K	B1-U3-G3	2591 lm	83	100W MH
LWP2-30W-CW	30W	110 lm/W	5000K	B1-U3-G3	3316 lm	72	100W MH
LWP2-50W-CW	50W	124 lm/W	5000K	B1-U4-G4	5969 lm	72	175W MH
LWP2-80W-CW	80W	127 lm/W	5000K	B1-U4-G5	9953 lm	72	250W MH
***LWP2-80W-NW**	80W	71 lm/W	4000K	B1-U4-G5	5682 lm	83	175W MH
LWP2-120W-CW	120W	123 lm/W	5000K	B2-U5-G5	14475 lm	72	400W MH

**While Supplies Last*