

Heat Fanlight

Housing Dimensions

- › 10-1/2" L x 11-3/8" W x 7-5/8" H

Housing

- › Corrosion-Resistant Galvanized Steel
- › Double hanger bar mounting brackets that are adjustable up to 24"
- › Sloped ceiling mounting capability up to 45 degrees
- › Effortless side electrical connection
- › Includes detachable 4" polymeric collar with lightweight built-in back draft damper

Motor

- › Power rating of 120V/60Hz
- › Permanently lubricated, energy efficient motor
- › Built-in overload disconnect for safety and longer motor life
- › Low RPM for quiet operation
- › ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit

Heater

- › 1000W PTC ceramic heater with metal blower
- › Thermal auto-self protection
- › Electric shock protection

Grille

- › Thermal paint 22 gauge sheet metal
- › Torsion spring clips included for easy installation

Warranty

- › 2 year limited warranty on parts

Lighting


FANLIGHTS

Not Included:
2 - 23 Watt GU24
Compact Fluorescent
Lamps



*Refer to Pg. J16
for Fan Curve (6)*

Grille

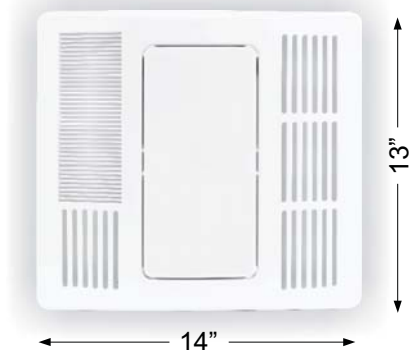

Cat. No.		ODHFL110
Static pressure	Inches w.g.	0.1"
Duct diameter	Inches	4"
Air volume	CFM	110
Noise	Sone	0.5
Power consumption	Watts	24.4
Energy efficiency	CFM/Watts	3.79
Power rating	V/Hz.	120/60
Weight	lbs	12.8
Standard Qty		1

*6" polymeric collar available upon request