

AWC-LWP4 Series - 30W

Descriptions



The AWC-LWP4 LED WALL PACK Lights - Adjustable CCT & Wattage version can help reduce the SKU and are ideal for commercial areas such as retail centers, loading docks, or warehouses. With keeping the same classic looking, customers now can easily adjust the CCT and Wattage in field through built-in Knobs inside the fixture. Also with factory pre-installed photocell, the same fixture can meet different requirements. UL listed for Wet Locations. DLC 5.1 Listed.




General Specifications

	Spec	AWC-LWP4-30W-P
Electrical	Input Voltage	120~277V
	Wattage Range	15W/20W/25W/30W
	Power Factor	> 0.9
Light Output	Lumens Range	1935lm/2580lm/3225lm/3824lm
	Efficacy	129 lm/W
	CRI	70+
	Color Temp. Range	3000K/4000K/5000K/5700K
	BUG	B1-U3-G2
	Distribution Type	TYPE IV
Physical	Equivalent	70W/100W/150W
	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket
	Ambient Operating Temp	-40°C / -40°F to 40°C / 104°F
Other	Mount	Wall Mount
	Certification	cULus E335594; DLC 5.1
	DLC Product ID	PRZB2U59

Dimensions

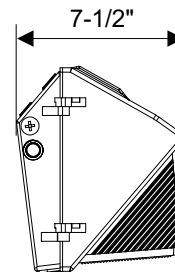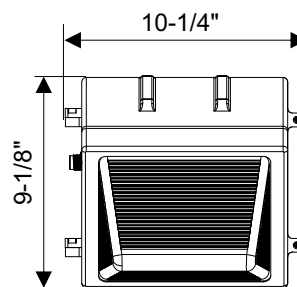

Photometrics

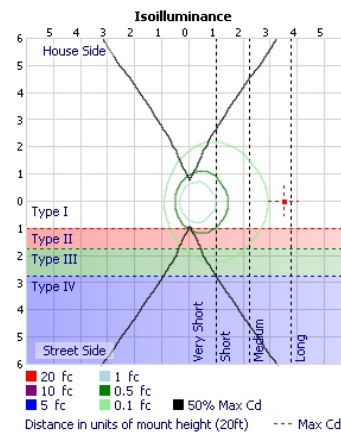

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **118°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable: **0-10V**

- ▶ **UL listed for Wet Location**
- ▶ **Features:**
 - Adjustable Color Temperature
 - Adjustable Wattage
 - Pre-installed Photocell



Item No.	Description	Std. Pkg.
AWC-LWP4-30W-P	LED ADJUSTABLE WATTAGE & CCT WALLPACK 15W~30W 120V~277V BRONZE	4



AWC-LWP4 Series - 80W

Descriptions



The AWC-LWP4 LED WALL PACK Lights - Adjustable CCT & Wattage version can help reduce the SKU and are ideal for commercial areas such as retail centers, loading docks, or warehouses. With keeping the same classic looking, customers now can easily adjust the CCT and Wattage in field through built-in Knobs inside the fixture. Also with factory pre-installed photocell, the same fixture can meet different requirements. UL listed for Wet Locations. DLC 5.1 Listed.




General Specifications

	Spec	AWC-LWP4-80W-P
Electrical	Input Voltage	120~277V
	Wattage Range	20W/40W/60W/80W
	Power Factor	> 0.9
Light Output	Lumens Range	2700lm/5400lm/8100lm/10502lm
	Efficacy	135 lm/W
	CRI	70+
	Color Temp. Range	3000K/4000K/5000K/5700K
	BUG	B3-U4-G4
	Distribution Type	TYPE IV
Physical	Equivalent	70W/150W/250W
	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket
	Ambient Operating Temp	-40°C / -40°F to 40°C / 104°F
Other	Mount	Wall Mount
	Certification	cULus E335594; DLC 5.1
	DLC Product ID	PGB8Z0L5

Dimensions

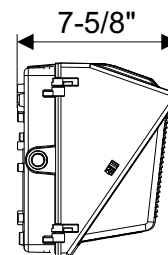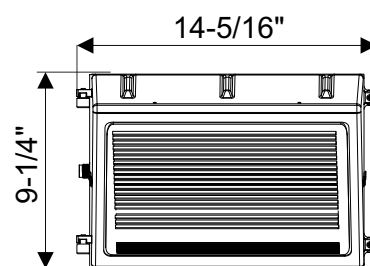

Photometrics

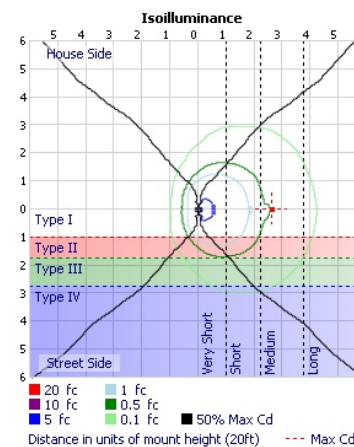

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **116°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable: **0-10V**
- ▶ **UL listed for Wet Location**
- ▶ **Features:**
 - Adjustable Color Temperature
 - Adjustable Wattage
 - Pre-installed Photocell



Item No.	Description	Std. Pkg.
AWC-LWP4-80W-P	LED ADJUSTABLE WATTAGE & CCT WALLPACK 20W~80W 120V~277V BRONZE	1

