

## SPECIFICATION & FEATURES

## WATERTIGHT HUBS

### DESCRIPTION:

Orbit Industries' standard watertight hubs are used with threaded rigid or IMC conduits to connect and bond them to threaded openings in boxes or enclosures. The die cast zinc watertight hubs may be used in both wet and dry locations. Orbit Industries' watertight hubs have a rugged metallic construction and they are durable. The rugged construction ensures mechanical protection. There is an insulated throat to protect wires and reduce the effort of pulling wires. Orbit Industries' watertight hubs also feature an O-ring to provide a rain-tight seal on electrical boxes or enclosures.




### CERTIFICATION:

UL file E310658, Conforms to UL 514B

### FEATURES:

- Zinc Die Cast
- 105°C rated Throat Insulator
- Insulated color may vary

### LINE DRAWINGS:

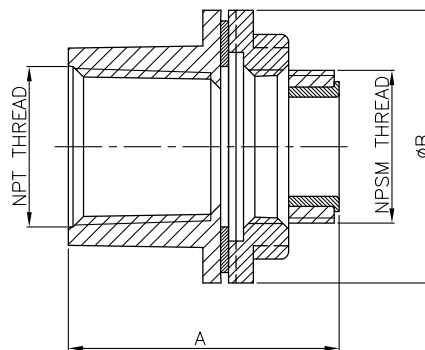

### CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	Std.Pkg.	Master Ctn.
WH-50	1/2"	1.417	1.220	25	125
WH-75	3/4"	1.614	1.496	25	125
WH-100	1"	1.870	1.890	25	125
WH-125	1-1/4"	2.008	2.244	10	50
WH-150	1-1/2"	2.126	2.520	10	50
WH-200	2"	2.205	3.031	10	50
WH-250	2-1/2"	2.638	3.543	5	25
WH-300	3"	2.638	4.173	2	10
WH-350	3-1/2"	2.697	4.764	2	10
WH-400	4"	2.697	5.354	2	10

