

## SPECIFICATION & FEATURES

### DESCRIPTION:

Orbit Industries' Malleable Iron Threadless Rigid Compression Couplings are made to join two unthreaded Rigid/IMC conduits in dry locations. Useful where field threading is undesirable or impractical. Trade Size from 1/2" To 4"

## MALLEABLE IRON THREADLESS RIGID COUPLINGS COMPRESSION TYPE 1/2" TO 4"




### CERTIFICATION:

UL file E310658, conforms to UL 514B

### FEATURES:

- Malleable iron construction ensures mechanical protection for the raceway
- Zinc Electroplated for added corrosion protection
- Concrete-Tight

### LINE DRAWINGS:

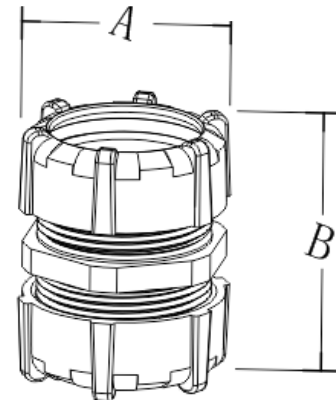

### CONFIGURATION DATA:

Part No.	EMT Size	A (in)	B (in)	Std. Pkg.	Master Ctn.
MRTC-50	1/2"	1.450	2.160	10	100
MRTC-75	3/4"	1.680	2.300	10	100
MRTC-100	1"	1.930	2.680	5	50
MRTC-125	1-1/4"	2.340	3.020	5	50
MRTC-150	1-1/2"	2.560	3.160	-	12
MRTC-200	2"	3.140	3.330	-	5
MRTC-250	2-1/2"	3.830	4.380	-	5
MRTC-300	3"	4.460	4.740	-	3
MRTC-350	3-1/2"	5.010	4.860	-	2
MRTC-400	4"	5.530	5.290	-	2

