



**FEATURES & BENEFITS:**

**Housing Dimensions**

- 9-1/8" L x 9-1/8" W x 7-5/8" H

**Housing**

- Heavy-duty steel housing coated with rust proof paint
- Adjustable double bar hanger system that extends up to 24"
- 4" exhaust pipe connection
- Wired for both fan or fanlight
- Effortless side electrical connection
- Termination damper to prevent cold air infiltration
- Light, durable, and sturdy

**Motor and Blower**

- Power rating of 120V/60Hz
- Permanently lubricated, energy efficient motor with ball bearings designed for continuous use
- Quick installation of motor and impeller assembly
- Effortless snap in wiring connection
- UL and cUL listed for tub/shower enclosure when connected to a GFCI protected branch circuit

**Grille**

- Contemporary design - with or without light kit
- Durable white ABS for easy cleaning
- Torsion spring clips included for easy installation
- Electronic ballast

**Lighting**



**FANLIGHTS**


Included: 2 - 18 Watt Flicker-Free, Electronic Ballast Compact Fluorescent Lamps

**Warranty**

- 2 year limited warranty



**Fanlights Model**

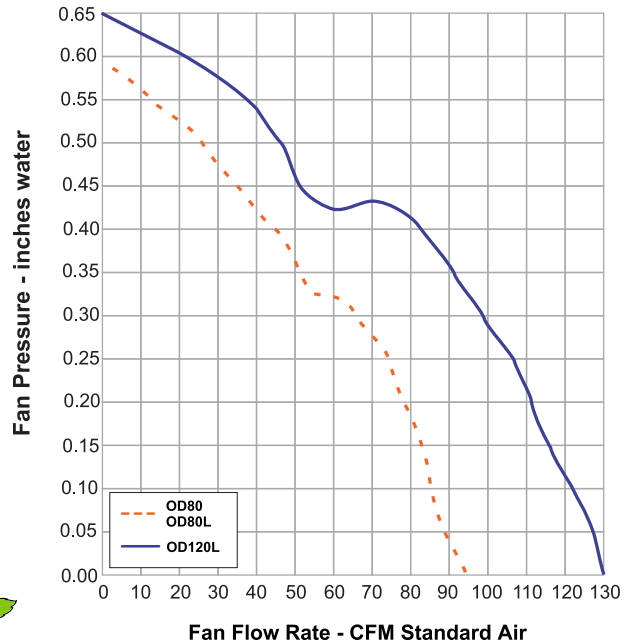

Model		FANS	FANLIGHTS
Cat. No.		OD80	OD120L
Static pressure	Inches w.g.	0.1"	0.1"
Air volume	CFM	80	120
Noise	Sone	<b>0.8</b>	<b>1.5</b>
Power consumption	Watts	27.9	37.0
Energy efficiency	CFM/Watts	2.87	3.24
Speed	RPM	946	1,201
Current	Amps	.18	.30
Power rating	V/Hz.	120/60	120/60
Duct diameter	Inches	4"	4"
Motor type		Enclosed	Enclosed
Weight	lbs	10	10
Master Qty.		4	4

Model #	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: