

LUHB3 Series - 100W

Descriptions


The LUHB3 is UFO shape LED High Bay with low-profile design, excellent cooling structure. It is ideal for commercial areas such as warehouse, station, supermarket, or exhibition hall. It provides multiple mounting constructions for various mounting request. This series is motion sensor compatible, and it has built-in safety cable for enhanced safety restraint. UL listed for wet locations. DLC premium listed.

General Specifications

| | Spec | LUHB3-100W-CW |
|--------------|------------------------|---|
| Electrical | Input Voltage | 120~277V |
| | Input Power | 100W |
| | Power Factor | > 0.9 |
| Light Output | Total Lumens | 13113 lm |
| | Efficacy | 136 lm/W |
| | CRI | 80 |
| | Color Temp. | 5000K |
| | BUG | B4-U0-G1 |
| | Distribution Type | TYPE VS Distribution |
| Physical | Equivalent | 400W |
| | Housing | ADC12 Die Cast Aluminum |
| | Finish | UV Resistant Black Powder Coat Finish |
| | Lens Material | High Light Transmittance Polycarbonate Lens |
| | Ambient Operating Temp | -40°C / -40°F to 40°C / 104°F |
| | Mount | Hook, Pendant, Trunnion |
| Other | Net Weight | 3.0 KG |
| | Certification | cULus E335594; DLC Premium |




Dimensions

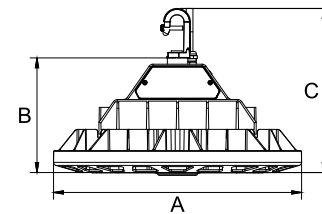

A x B x C:
 100W: 12-3/8" x 5-3/4" x 8-1/4"

Photometrics

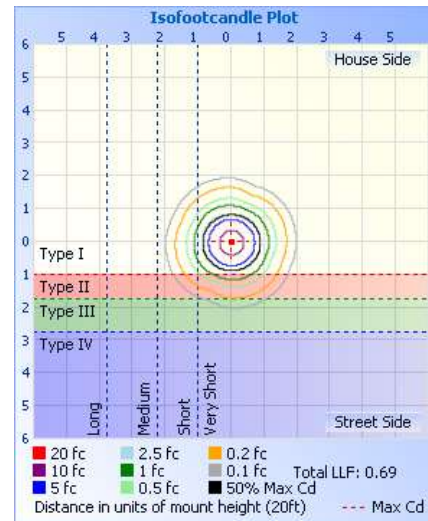

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **90°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable to 10%
- ▶ **UL listed for Wet Location**
- ▶ Accessories Sold Separately:
 Motion Sensor: **MMS-R**
 Remote Control: **MMS-RC**
 Trunnion Mount: **LUHB3-T-100**



| Item No. | Description | Std. Pkg. |
|---------------|---|-----------|
| LUHB3-100W-CW | LED UFO HIGHBAY MOTION COMPATIBLE 100W 120~277V 5000K-BLACK | 1 |
| MMS-R | MICROWAVE MOTION SENSOR, ROUND, 120~277V | 1 |
| MMS-RC | MICROWAVE MOTION SENSOR, REMOTE CONTROL | 1 |
| LUHB3-T-100 | SURFACE MOUNT BRACKET FOR LUHB3 100W-150W, 120~277V | 20 |



LUHB3 Series - 150W

Descriptions


The LUHB3 is UFO shape LED High Bay with low-profile design, excellent cooling structure. It is ideal for commercial areas such as warehouse, station, supermarket, or exhibition hall. It provides multiple mounting constructions for various mounting request. This series is motion sensor compatible, and it has built-in safety cable for enhanced safety restraint. UL listed for wet locations. DLC premium listed.

General Specifications

| | Spec | LUHB3-150W-CW |
|--------------|------------------------|---|
| Electrical | Input Voltage | 120~277V |
| | Input Power | 150W |
| | Power Factor | > 0.9 |
| Light Output | Total Lumens | 20966 lm |
| | Efficacy | 139 lm/W |
| | CRI | 80 |
| | Color Temp. | 5000K |
| | BUG | B4-U0-G2 |
| | Distribution Type | TYPE VS Distribution |
| Physical | Equivalent | 750W |
| | Housing | ADC12 Die Cast Aluminum |
| | Finish | UV Resistant Black Powder Coat Finish |
| | Lens Material | High Light Transmittance Polycarbonate Lens |
| | Ambient Operating Temp | -40°C / -40°F to 40°C / 104°F |
| Other | Mount | Hook, Pendant, Trunnion |
| | Net Weight | 3.0 KG |
| | Certification | cULus E335594; DLC Premium |




Dimensions

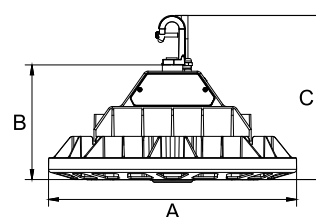

A x B x C:
150W: 12-3/8" x 5-3/4" x 8-1/4"

Photometrics

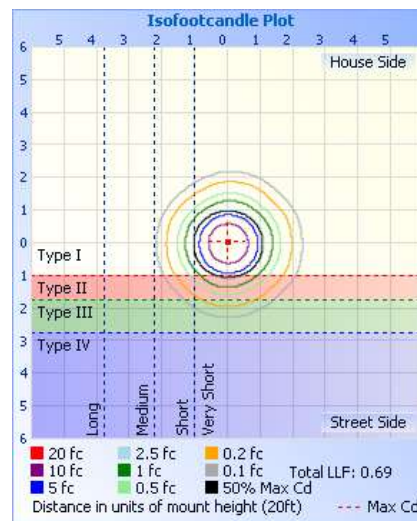

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **90°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable to 10%
- ▶ **UL listed for Wet Location**
- ▶ Accessories Sold Separately:
 Motion Sensor: **MMS-R**
 Remote Control: **MMS-RC**
 Trunnion Mount: **LUHB3-T-100**



| Item No. | Description | Std. Pkg. |
|---------------|---|-----------|
| LUHB3-150W-CW | LED UFO HIGHBAY MOTION COMPATIBLE 150W 120~277V 5000K-BLACK | 1 |
| MMS-R | MICROWAVE MOTION SENSOR, ROUND, 120~277V | 1 |
| MMS-RC | MICROWAVE MOTION SENSOR, REMOTE CONTROL | 1 |
| LUHB3-T-100 | SURFACE MOUNT BRACKET FOR LUHB3 100W-150W, 120~277V | 20 |



LUHB3 Series - 230W

Descriptions


The LUHB3 is UFO shape LED High Bay with low-profile design, excellent cooling structure. It is ideal for commercial areas such as warehouse, station, supermarket, or exhibition hall. It provides multiple mounting constructions for various mounting request. This series is motion sensor compatible, and it has built-in safety cable for enhanced safety restraint. UL listed for wet locations. DLC premium listed.

General Specifications

| | Spec | LUHB3-230W-CW |
|--------------|------------------------|---|
| Electrical | Input Voltage | 120~277V |
| | Input Power | 230W |
| | Power Factor | > 0.9 |
| Light Output | Total Lumens | 30988 lm |
| | Efficacy | 140 lm/W |
| | CRI | 80 |
| | Color Temp. | 5000K |
| | BUG | B5-U0-G2 |
| | Distribution Type | TYPE VS Distribution |
| | Equivalent | 1000W |
| Physical | Housing | ADC12 Die Cast Aluminum |
| | Finish | UV Resistant Black Powder Coat Finish |
| | Lens Material | High Light Transmittance Polycarbonate Lens |
| | Ambient Operating Temp | -40°C / -40°F to 40°C / 104°F |
| | Mount | Hook, Pendant, Trunion |
| Other | Net Weight | 4.7 KG |
| Other | Certification | cULus E335594; DLC Premium |




Dimensions

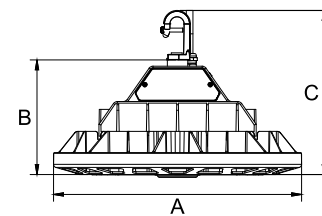

A x B x C:
 230W: 13-3/4" x 6-1/8" x 8-1/2"

Photometrics

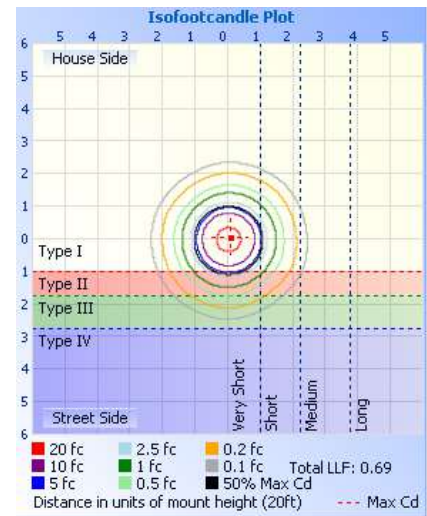

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **90°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable to 10%
- ▶ **UL listed for Wet Location**
- ▶ Accessories Sold Separately:
 Motion Sensor: **MMS-R**
 Remote Control: **MMS-RC**
 Trunion Mount: **LUHB3-T-230**



| Item No. | Description | Std. Pkg. |
|---------------|---|-----------|
| LUHB3-230W-CW | LED UFO HIGHBAY MOTION COMPATIBLE 230W 120~277V 5000K-BLACK | 1 |
| MMS-R | MICROWAVE MOTION SENSOR, ROUND, 120~277V | 1 |
| MMS-RC | MICROWAVE MOTION SENSOR, REMOTE CONTROL | 1 |
| LUHB3-T-230 | SURFACE MOUNT BRACKET FOR LUHB3 230W, 120~277V | 20 |

