

LWP2-30W

Descriptions

The LWP2 is a traditionally designed LED Wall Pack ideal for commercial areas such as retail centers, loading docks, or warehouses. Its low power consumption makes it a perfect choice for customers looking to upgrade technology while keeping the same classic motif. UL listed for Wet Locations. Photocell Optional.




LWP2-30W-CW
LWP2-30W-WW


General Specifications

	Spec	LWP2-30W-CW	LWP2-30W-WW
Electrical	Input Voltage	120~277V	
	Input Power	30W	
	Power Factor	> 0.9	
Light Output	Total Lumens	3316 lm	2591 lm
	Efficacy	110 lm/W	86 lm/W
	CRI	70+	80+
	Color Temp.	5000K	3000K
	BUG	B1-U3-G3	
	Distribution Type	TYPE IV Distribution	
Physical	Housing	ADC12 Die Cast Aluminum	
	Finish	UV Resistant Bronze Powder Coat Finish	
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket	
	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F	
	Mount	Wall Mount	
	Net Weight	2.26 KG	
Other	Certification	cULus E335594; DLC4.2	

Dimensions

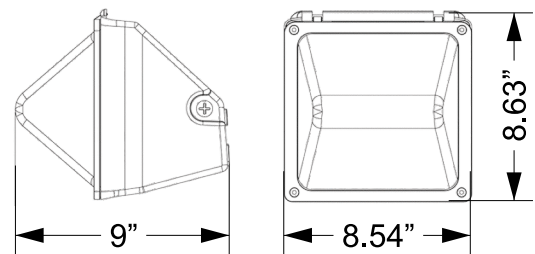

Photometrics

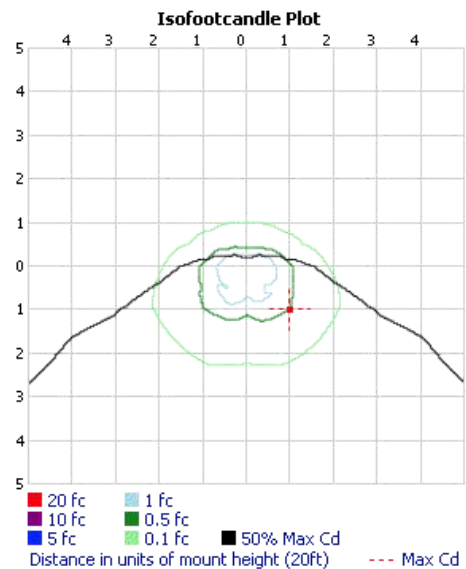

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **120°**
- ▶ Photocell Optional



Item No.	Description	Std. Pkg.
LWP2-30W-CW	LED WALL PACK 30W 120~277V 5000K CW - BRONZE	4
LWP2-30W-WW	LED WALL PACK 30W 120~277V 3000K WW - BRONZE	4



LWP2-50W

Descriptions

The LWP2 is a traditionally designed LED Wall Pack ideal for commercial areas such as retail centers, loading docks, or warehouses. Its low power consumption makes it a perfect choice for customers looking to upgrade technology while keeping the same classic motif. UL listed for Wet Locations. Photocell Optional.




LWP2-50W-CW


General Specifications

	Spec	LWP2-50W-CW
Electrical	Input Voltage	120~277V
	Input Power	50W
	Power Factor	> 0.9
Light Output	Total Lumens	5969 lm
	Efficacy	124 lm/W
	CRI	70+
	Color Temp.	5000K
	BUG	B1-U4-G4
	Distribution Type	TYPE IV Distribution
Physical	Equivalent	175W
	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket
	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F
	Mount	Wall Mount
Other	Net Weight	3.65 KG
	Certification	cULus E335594; DLC 4.2

Dimensions

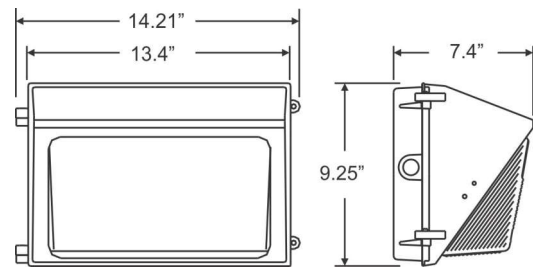

Photometrics

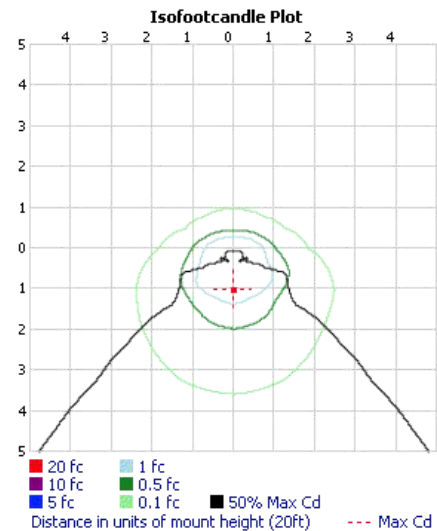

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **120°**
- ▶ Photocell Optional



Item No.	Description	Std. Pkg.
LWP2-50W-CW	LED WALL PACK 50W 120~277V 5000K CW - BRONZE	1



LWP2-80W

Descriptions

The LWP2 is a traditionally designed LED Wall Pack ideal for commercial areas such as retail centers, loading docks, or warehouses. Its low power consumption makes it a perfect choice for customers looking to upgrade technology while keeping the same classic motif. UL listed for Wet Locations. Photocell Optional.




LWP2-80W-CW


General Specifications

	Spec	LWP2-80W-CW
Electrical	Input Voltage	120~277V
	Input Power	80W
	Power Factor	> 0.9
Light Output	Total Lumens	9953 lm
	Efficacy	127 lm/W
	CRI	70+
	Color Temp.	5000K
	BUG	B1-U4-G5
	Distribution Type	TYPE IV Distribution
	Equivalent	250W
	Housing	ADC12 Die Cast Aluminum
Physical	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket
	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F
	Mount	Wall Mount
	Net Weight	4.27 KG
Other	Certification	cULus E335594; DLC 4.2

Dimensions

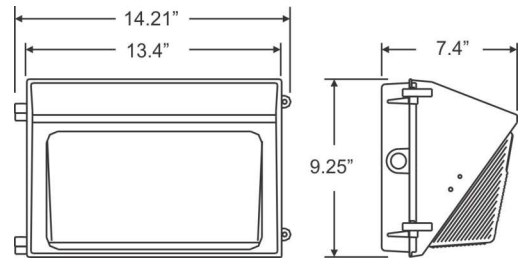

Photometrics

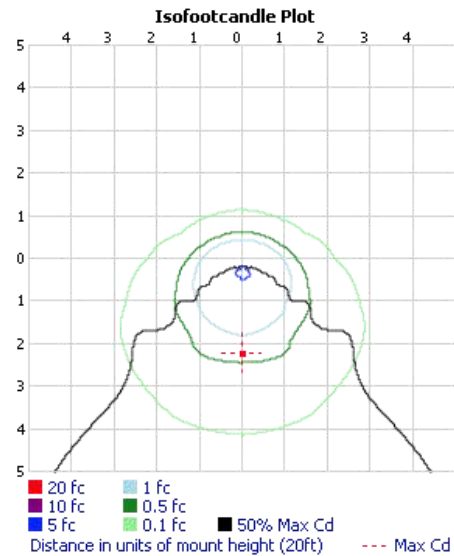

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **120°**
- ▶ Photocell Optional
- ▶ Dimmable to 10%



Item No.	Description	Std. Pkg.
LWP2-80W-CW	LED WALL PACK 80W 120~277V 5000K CW - BRONZE	1



LWP2-120W-CW

Descriptions

The LWP2 is a traditionally designed LED Wall Pack ideal for commercial areas such as retail centers, loading docks, or warehouses. Its low power consumption makes it a perfect choice for customers looking to upgrade technology while keeping the same classic motif. UL listed for Wet Locations. Photocell Optional.




LWP2-120W-CW


General Specifications

	Spec	LWP2-120W-CW
Electrical	Input Voltage	120~277V
	Input Power	120W
	Power Factor	> 0.9
Light Output	Total Lumens	14475 lm
	Efficacy	123 lm/W
	CRI	70+
	Color Temp.	5000K
	BUG	B2-U5-G5
	Distribution Type	TYPE IV Distribution
Physical	Equivalent	400W
	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic borosilicate molded lens with weatherproof gasket
	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F
	Mount	Wall Mount
Other	Net Weight	7.3 KG
	Certification	cULus E335594; DLC 4.2

Dimensions

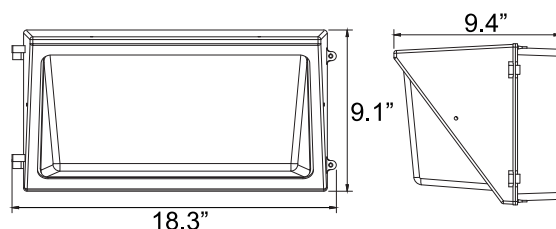

Photometrics

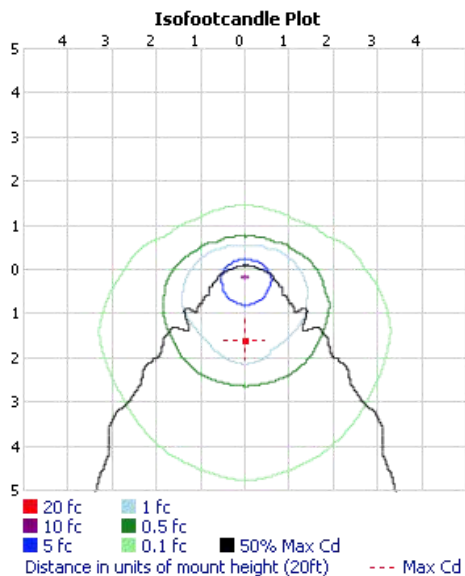

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **120°**
- ▶ Photocell Optional
- ▶ Dimmable to 10%



Item No.	Description	Std. Pkg.
LWP2-120W-CW	TRADITIONAL LED WALLPACK 120W 120V~277V 5000K CW - BRONZE	1

