

LWP25 12W

Descriptions


The LWP25 is a slim architectural LED wall pack with a unique pivoting head, which adjusts from 0° to 90° angles. The LWP25's adjustable head allows users to aim light precisely before and after installation. Ideal for illuminating outdoor walkways, landscapes and building perimeters. The LWP25 LED wallpack is also easy to install, and fastens to most 30 or 40 junction boxes. A 120V or 277V Photocell is optional. DLC Listed. UL Listed for Wet Locations.




General Specifications

	Spec	LWP25-12W-CW	LWP25-12W-WW
Electrical	Input Voltage	120~277V	
	Input Power	12W	
	Power Factor	> 0.9	
Light Output	Total Lumens	1280 lm	1211 lm
	Efficacy	103 lm/W	98 lm/W
	CRI	80+	
	Color Temp.	5000K	3000K
	BUG	B1-U0-G0	B1-U0-G0
	Distribution Type	TYPE II	TYPE II
Physical	Equivalent	50W	50W
	Housing	ADC12 Die Cast Aluminum	
	Finish	UV Resistant Bronze Powder Coat Finish	
	Lens Material	High Light Transmittance Polycarbonate Lens with Weatherproof Gasket	
Other	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F	
	Mount	Wall Mount	
Other	Certification	cULus E335594; DLC	

Dimensions

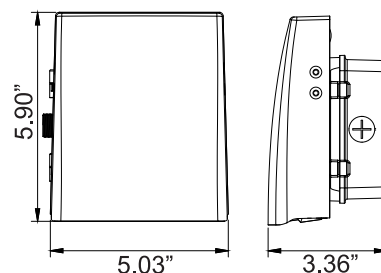

Photometrics

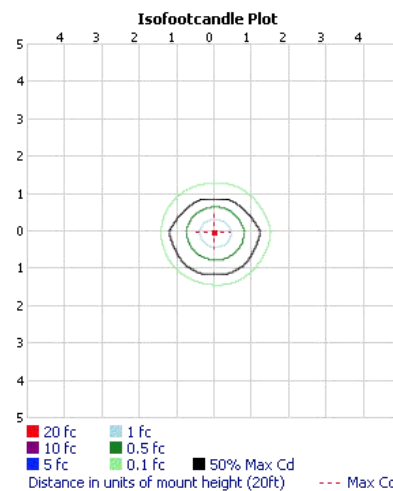

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **80x100°**
- ▶ Photocell Optional
- ▶ 0-90° Adjustable



Item No.	Description	Std. Pkg.
LWP25-12W-CW	SLIM CUTOFF LED WALLPACK 12W 120~277V 5000K CW COOL WHITE - BRONZE	12
LWP25-12W-WW	SLIM CUTOFF LED WALLPACK 12W 120~277V 3000K WW WARM WHITE- BRONZE	12



LWP25 30W

Descriptions


The LWP25 is a slim architectural LED wall pack with a unique pivoting head, which adjusts from 0° to 90° angles. The LWP25's adjustable head allows users to aim light precisely before and after installation. Ideal for illuminating outdoor walkways, landscapes and building perimeters. The LWP25 LED wallpack is also easy to install, and fastens to most 30 or 40 junction boxes. A 120V or 277V Photocell is optional. DLC Listed. UL Listed for Wet Locations.

General Specifications


	Spec	LWP25-30W-CW
Electrical	Input Voltage	120~277V
	Input Power	30W
	Power Factor	> 0.9
Light Output	Total Lumens	3214 lm
	Efficacy	116 lm/W
	CRI	80+
	Color Temp.	5000K
	BUG	B2-U0-G1
	Distribution Type	TYPE I
Physical	Equivalent	100W
	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	High Light Transmittance Polycarbonate Lens with Weatherproof Gasket
	Ambient Operating Temp	-20°C / -4°F to 40°C / 104°F
Other	Mount	Wall Mount
Other	Certification	cULus E335594; DLC



Dimensions

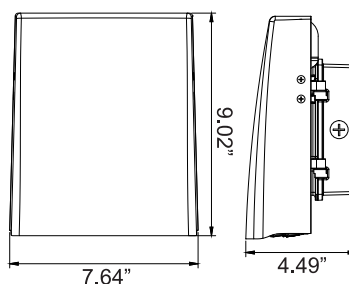

Photometrics

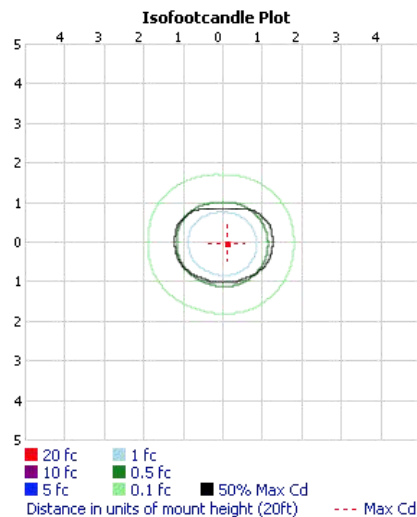

- ▶ LED Brand: **Philips Lumileds**
- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ **UL listed for Wet Location**
- ▶ Beam Angle: **80x100°**
- ▶ Photocell Optional
- ▶ 0-90° Adjustable



PHILIPS LUMILEDS



Item No.	Description	Std. Pkg.
LWP25-30W-CW	SLIM CUTOFF LED WALLPACK 30W 120~277V 5000K CW COOL WHITE - BRONZE	4

