


SPECIFICATION & FEATURES

DESCRIPTION:

Orbit Industries' Simple Support Bracket for Up To 5" Boxes (SSB-T5) expands from 15" to 25" to suit all common wall stud and hard lid ceiling cavities. SSB-T5 is the first telescoping bracket to accept 4", 4-11/16" and 5" square boxes. Quickly and easily mount junction boxes anywhere between studs, via snap-on Orbit Adapters (UMA for 4" and 4-11/16" – UMA-LVBS for up to 5"). Rigid, double-rail design requires no extra back support – even at full extension! Up to three outlet boxes between 24" stud bays. Patented. UL Listed.

To order SSB-T5 preassembled in a variety of configurations, please see Orbit's Ready-To-Install product line.

SIMPLE SUPPORT BRACKET T5 VERSION

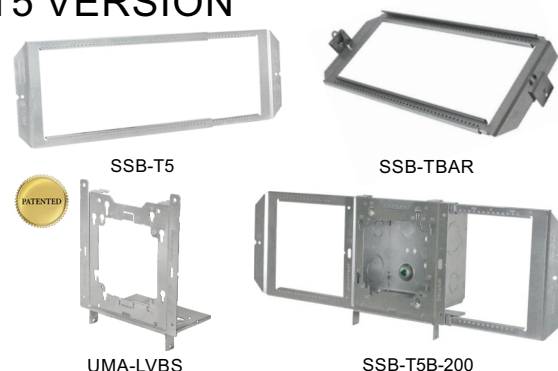

FEATURES:

- Telescoping bracket adjusts from 15" to 25"
- Mount boxes between studs or overhead between hard lid ceiling joists (for T-grid, see SSB-TBAR)
- SSB-TBAR includes two riveted clips for T-bar drop ceiling installation. Tek screw provisions on each clip help comply with NEC 314.23 (D) (1)
- T-bar grid clips on SSB-TBAR also include seismic wiring holes to meet earthquake codes
- Install boxes quickly with snap-on Adapters: UMA (4" and 4-11/16" Sq. only) and UMA-LVBS (up to 5" Sq.)
- UMA-LVBS permits 4" mud ring attachment to 4", 4-11/16" and 5" square boxes
- Slide junction box to critical position - lock in place with one Tek screw
- Compatible with Orbit snap-on Adjustable Boxes: UMAB Series (3-1/2" deep 4S box) and UMAB-4R Series (4O octagon box)
- Compatible with Ready-to-Install LVBS Assemblies (include adapter, box and/or ring)
- Add and remove boxes without detaching SSB-T5 from studs or disassembling bracket
- Mounts up to three junction boxes between 24" wall studs
- Rigidity eliminates need for far-side back support
- Horizontal pin-holes provide quick starting point for screws
- Optional BMCS Series provides built-in cable/conduit support
- Compatible with Orbit's UL Adjustable Rings
- Use LVSB Series Rings for low voltage applications that require no back-box
- Ideal for Prefabrication: collapse and expand SSB-T5 without removing junction boxes or adapters
- Order SSB-T5 as a Ready-to-Install product, available in a variety of box sizes, types and mounting styles
- Recommended for use with boxes 2-1/8" deep or (deeper)
- SSB-T5, UMA-LVBS, US-UMA-LVBS Patented

CONFIGURATION DATA:

Part No.	Description	Sides K.O.	Bottom K.O.	Std.Pkg.
*SSB-T5	SIMPLE SUPPORT BRACKET FITS 4", 4-11/16" OR 5" BOXES, EXPANDS FROM 15" TO 25", MADE IN US	-	-	25
SSB-TBAR	SIMPLE SUPPORT BRACKET WITH T-BAR DROP CEILING MOUNTING CLIPS	-	-	20
SSB-4S	PREASSEMBLED SSB-T5 WITH UMA AND 4" (4S) 2-1/8" DEEP BOX WITH 10" GROUND PIGTAIL	(8) - 1/2", (4) - 3/4"	(2) - 1/2", (2) - 3/4"	12
SSB-4S-MKO	PREASSEMBLED SSB-T5 WITH UMA AND 4" (4S) 2-1/8" DEEP BOX WITH 10" GROUND PIGTAIL	(8) - 1/2", (4) - MKO	(2) - 1/2", (2) - MKO	12
SSB-5S-MKO	PREASSEMBLED SSB-T5 WITH UMA and 4-11/16" (5S) 2-1/8" DEEP BOX WITH 10" GROUND PIGTAIL	(2) - 1/2", (10) - MKO	(2) - 1/2", (2) - MKO	12
SSB-T5B-200	PREASSEMBLED SSB-T5 WITH UMA-LVBS AND TRUE 5" SQUARE BOX	(2) - 1" to 2" CKO, (2) - 1" & 1-1/4" MKO, (2) - 1/2" & 3/4" MKO	(1) - 1/2" & 3/4" MKO, (1) - 3/4" & 1" MKO, (1) - 1/2"	10
SSB-A4	PREASSEMBLED SSB WITH UMA AND T5 Bracket adjusts from 15" to 25"	(4) - 1/2", (2) - MKO, (4) - Loom	(1) - 1/2"	12
UMA	UNIVERSAL MOUNTING ADAPTER FOR MOUNTING 4S AND 5S BOXES TO SSB, SSB-T5, USB, AND DIRECTLY TO STUD	-	-	25
UMA-LVBS	UNIVERSAL MOUNTING ADAPTER W/ BACK SUPPORT. FITS 4", 4-11/16" or 5" SQUARE BOXES	-	-	25
*US-UMA-LVBS	UNIVERSAL MOUNTING ADAPTER W/ BACK SUPPORT. FITS 4", 4-11/16" or 5" SQUARE BOXES, MADE IN US	-	-	25

