
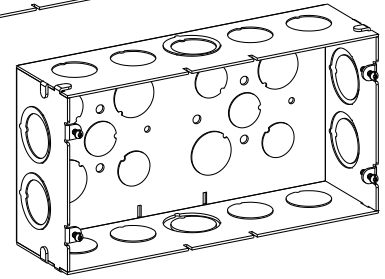


SPECIFICATION & FEATURES

MULTIGANG DEEP SWITCH BOXES 2-1/2" DEEP

DESCRIPTION:

Orbit Industries' Multigang Switch Boxes are used in the installation of lighting fixtures, switches, and other devices with a 2-1/2" depth. They are constructed from 16 gauge galvanized steel. Models support multiple gangs ranging from 2 to 6 gang. Bottom knockouts fit 1/2" and 3/4" conduits; side knockouts fit 1/2" and 3/4" conduits or 3/4" and 1" conduits. The low voltage partition is used to divide boxes into compartments.



CERTIFICATION:

UL file E227970, conforms to UL514A.



FEATURES

Knockout:

50: 1/2" K.O.

75: 3/4" K.O.

MKO: Moon K.O.


DIMENSIONS

Depth: 2-1/2"


Other Dimensions see below

CONFIGURATION DATA


Catalog No.	No. of Gangs	Knockouts		W x H	Cu.In.	Std. Pkg.
		Sides	Bottom			
SDB-2	2	4)-3/4", (8)-1/2"&3/4" MKO	(3)-1/2", (2)-3/4"	6-13/16"x4-9/16"	70.0	5
SDB-3	3	(8)-3/4", (6)-1/2"&3/4" MKO	(6)-1/2", (4)-3/4"	8-5/8"x4-9/16"	90.0	5
SDB-4	4	(4)-3/4", (8)-1/2"&3/4" MKO	(6)-1/2", (4)-3/4"	10-7/16"x4-9/16"	110.0	5
SDB-5	5	(6)-3/4", (8)-1/2"&3/4" MKO	(6)-1/2", (4)-3/4"	12-1/4"x4-9/16"	130.0	5
SDB-6	6	(6)-3/4", (8)-1/2"&3/4" MKO	(6)-1/2", (4)-3/4"	14-1/16"x4-9/16"	150.0	1
SDBL-2	2	(4)-3/4", (8)-3/4" & 1" MKO	(3)-1/2", (2)-3/4"	6-13/16"x4-9/16"	70.0	5
SDBL-3	3	(8)-3/4", (6)-3/4" & 1" MKO	(6)-1/2", (4)-3/4"	8-5/8"x4-9/16"	90.0	5
SDBL-4	4	(4)-3/4", (8)-3/4" & 1" MKO	(6)-1/2", (4)-3/4"	10-7/16"x4-9/16"	110.0	5
SDBL-5	5	(6)-3/4", (8)-3/4" & 1" MKO	(6)-1/2", (4)-3/4"	12-1/4"x4-9/16"	130.0	5
SDBL-6	6	(6)-3/4", (8)-3/4" & 1" MKO	(6)-1/2", (4)-3/4"	14-1/16"x4-9/16"	150.0	1




SDB-2
SDBL-2




SDB-3
SDBL-3



SDB-4
SDBL-4



SDB-5
SDBL-5



SDB-6
SDBL-6

