

# A10 | 4S Deep Boxes



## 4" SQUARE (4S)

### DEEP BOXES

#### WELDED

#### 2-1/8" DEEP

30.3 Cu. In.

### WITH METAL CLAD (BX/MC) CABLE CLAMPS

#### BX/MC CLAMP FEATURES

- ▶ All MC series boxes are suitable for use with MCI-A Type

#### METAL STUD BRACKET FEATURES

- ▶ U.S. Patent No.: 8,262,043 Metal Stud (MS) Bracket engages on either side of metal stud

**\*\*Model Revised Feb. 2008**


#### BOXES WITH PIGTAIL FEATURES

- ▶ 7" Solid Cu. #12AWG Pigtail pre-assembled with Ground Emboss and 10-32 Ground Screw
- ▶ 10" Pigtail for 4SDB-AMC-PT


#### NOTE

- ▶ For Fixture/Luminaire Support of 50 lbs or less (Except 4SDB-MC-MS)


Cat. No.	Bracket & Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
4SDB-MC	-	4 - 1/2", 2 - MKO, 4 - Loom	1 - 1/2"	24
4SDB-AMC-PT	-	4 - 1/2", 2 - MKO, 4 - Loom	1 - 1/2"	24
4SDB-MC-FB	FB, Flush	2 - 1/2", 1 - MKO, 4 - Loom	1 - 1/2"	24
4SDB-MC-FB-PT	FB, Flush	2 - 1/2", 1 - MKO, 4 - Loom	1 - 1/2"	24
4SDB-MC-B	B, Flush	2 - 1/2", 1 - MKO, 4 - Loom	1 - 1/2"	24
4SDB-MC-MS**	MS, Self-Gripping	2 - 1/2", 1 - MKO, 4 - Loom	1 - 1/2"	24




4SDB-MC




4SDB-AMC-PT




4SDB-MC-FB




4SDB-MC-FB-PT



4SDB-MC-B



4SDB-MC-MS\*\*




#### TRADITIONAL

Ground Screw Interference - does not mount directly to Box Brackets

#### 4SDB-AMC-PT

Unique ground screw location allows fastening of box to any Adj. Box Bracket

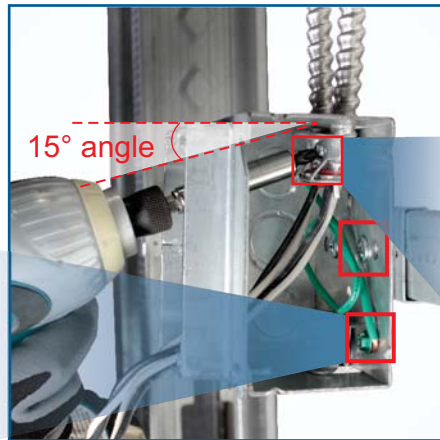

15° angle



#### 4SDB-AMC-PT

MC Clamp screws set at a 15° angle, allowing MC cable to be secured with the mud ring still on!

### Cut-away side view

- ▶ **600V** MKO's and CKO's suitable for bonding without any additional bonding means up to 600V
- ▶ Acceptable for use in 2-hour rated walls
- ▶ Visit [www.ul.com](http://www.ul.com) or QCIT Guide on page W1 for more information