

EASY ACCESS LIGHTING BOX 2-1/8" DEEP 30.3 Cu. In.

PRODUCT FEATURES

- ▶ Fast and efficient installations
- ▶ Sliding cover plate for one person installations
- ▶ Swivel reduces damage to hanging fixtures when struck
- ▶ Complies with NEC 314.27 (A)(D) for up to 90 lbs. of fixture load

PATENTED


**ORBIT INDUSTRIES
EXCLUSIVE**




**Video Available
On Our Website!**

Cat. No.	Description	Dimensions (W x H)	Knockouts		Std. Pkg.
			Sides	Bottom	
EALBS	Easy Access Lighting Box with Sliding Swivel	4" X 4"	4 - CKO	3 - 1/2", 1 - 3/4"	10

Only box UL-Listed for up to 90lbs of fixture load!



Reducing bushing
for 1/2" conduit
included

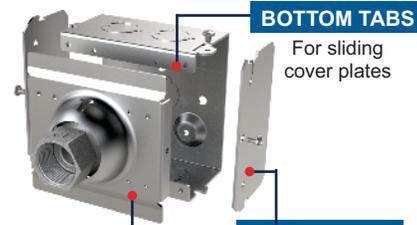

SWIVEL COVER PLATE

20° Swivel Angle –
Fits 3/4" conduit

**DETACHABLE
SIDES**

For easy wiring

**50%
LABOR
SAVINGS**



TRADITIONAL METHOD

Requires two installers



WITH ORBIT'S EALBS

Install Swivel Plate on lighting fixture and slide it into the box. One installer completes wiring while fixture hangs



CONDUIT LOCKING CONNECTOR


PRODUCT FEATURES

- ▶ Steel
- ▶ Fits 4", 4-11/16" sq. and 40 boxes as well as Orbit's patented EALBS
- ▶ Hooks prevent rotation of fixtures such as security cameras and emergency lighting
- ▶ Holes allow for branch line restraints
- ▶ Includes set-screw and locknut
- ▶ Can replace Rigid Threaded Conduit Fittings

**Video Available
On Our Website!**



PATENTED



Cat. No.	Description	Trade Size	Std. Pkg.	Mst. Ctn.
CLCSL-50	1/2" Conduit Locking Connector with Seismic Wire Holes	1/2"	10	100
CLCSL-75	3/4" Conduit Locking Connector with Seismic Wire Holes	3/4"	10	100

EZ-HANG BOXES WELDED OR DRAWN 2-1/8" DEEP WITH RAISED GROUND EMBOSS

PRODUCT FEATURES

- ▶ Back-center K.O. replaced with through hole eliminating need for washer or punching back-center K.O. when mounting boxes in suspended application.
- ▶ **4SDB-MKO-S**: 0.395" diameter hole (for 3/8" rod)
- ▶ **D5SDB-CKO-S**: 0.27" diameter hole (for 1/4" rod)

Cat. No.	Description	Cu. In	Knockouts		Std. Pkg.
			Sides	Bottom	
4SDB-MKO-S <small>NEW</small>	4" Sq. Welded Special Box with MKO	30.3	8 - 1/2", 4 - MKO	1 - 1/2", 2 - MKO	24
D5SDB-CKO-S	4-11/16" Sq. Drawn Special Box with CKO	42.0	2 - 1/2", 10 - CKO	3 - 3/4"	24

NEW



Secure to ceiling with just
a rod and locknut
4SDB-MKO-S 3/8" ROD
D5SDB-CKO-S 1/4" ROD

