

EASY ACCESS LIGHTING BOX 2-1/8" DEEP 30.3 Cu. In.

PRODUCT FEATURES

- ▶ Fast and efficient installations
- ▶ Sliding cover plate for one person installations
- ▶ Swivel reduces damage to hanging fixtures when struck
- ▶ Complies with NEC 314.27 (A)(D) for up to 90 lbs. of fixture load




| Cat. No. | Description | Dimensions (W x H) | Knockouts | | Std. Pkg. |
|----------|----------------------------------------------|--------------------|-----------|--------------------|-----------|
| | | | Sides | Bottom | |
| EALBS | Easy Access Lighting Box with Sliding Swivel | 4" X 4" | 4 - CKO | 3 - 1/2", 1 - 3/4" | 10 |

Only box UL-Listed for up to 90lbs of fixture load!



Reducing bushing for 1/2" conduit included

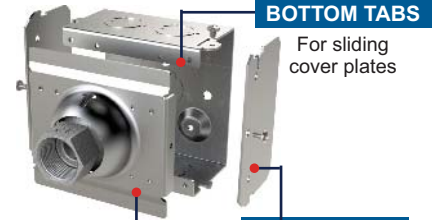

BOTTOM TABS

For sliding cover plates

SWIVEL COVER PLATE

20° Swivel Angle – Fits 3/4" conduit

DETACHABLE SIDES


For easy wiring

PATENTED



Video Available On Our Website!

50% LABOR SAVINGS



TRADITIONAL METHOD

Requires two installers



WITH ORBIT'S EALBS

Install Swivel Plate on lighting fixture and slide it into the box. One installer completes wiring while fixture hangs



CONDUIT LOCKING CONNECTOR

PRODUCT FEATURES

- ▶ Steel
- ▶ Fits 4", 4-11/16" sq. and 4O boxes as well as Orbit's patented EALBS
- ▶ Hooks prevent rotation of fixtures such as security cameras and emergency lighting
- ▶ Holes allow for branch line restraints
- ▶ Includes set-screw and locknut
- ▶ Can replace Rigid Threaded Conduit Fittings



Video Available On Our Website!

PATENTED



| Cat. No. | Description | Trade Size | Std. Pkg. | Mst. Ctn. |
|----------|--------------------------------------------------------|------------|-----------|-----------|
| CLCSL-50 | 1/2" Conduit Locking Connector with Seismic Wire Holes | 1/2" | 10 | 100 |
| CLCSL-75 | 3/4" Conduit Locking Connector with Seismic Wire Holes | 3/4" | 10 | 100 |



CLCSL



Locknut Included



Before Installation



After Installation Prevents Rotation

Exit & Emergency

