



“Very Quiet” Ceiling Ventilation Fan

**Model: OEP110
110 CFM 2. Sone**

FEATURES and BENEFITS:

Housing

- Heavy duty steel housing with rust proof paint
- Isolation mounting brackets spanning up to 24"
- 4" exhaust pipe connection
- **Wired for BOTH - fan only and fanlight**
- Effortless side electrical connection
- Termination damper to prevent cold air infiltration
- Light, durable and sturdy

Blower and Motor

- Power rating of 120 volts and 60 hz
- Effortless snap in wiring connection
- UL and CUL listed for tub/shower enclosure when connected to a GFCI protected branch circuit
- Quick installation of motor and impeller assembly
- Permanently lubricated motor
- Energy efficient motor

Grille and Light Grille

- Contemporary design
- Durable white ABS, paintable
- Easy clean finish
- Slide in torsion spring installation

Packaging

- Single pack - complete fan per box
- Multi-pack - housing only 4 per box
- Multi-pack - fan & grille only 4 per box

Warranty

- 2 year limited warranty on parts



Grille



← 11 7/8" square →

Housing & Motor



← 10 5/8" square →

Motor




Housing



← 9 1/8" square →

HVI Certified Data		4" Duct	OEP 110
Static Pressure	inches w.g.		0.1
Air Volume	CFM		110
Noise	Sone		2.0
Power Consumption	Watts		27
Energy Efficiency	CFM/Watts		4.14
Speed	RPM		1,393
Current	Amps		.16
Power Rating	V/Hz.		120/60

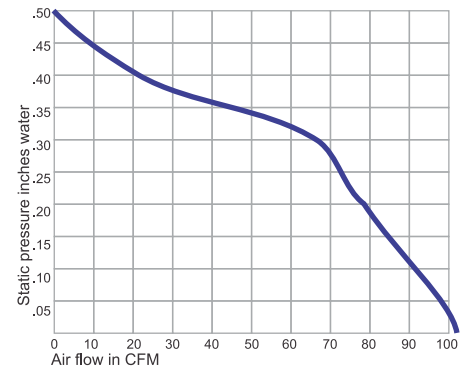

Model #	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: