

LLHB3-90W

Descriptions

The LLHB3 is a simple, light designed LED Linear High Bay with better cooling design and high lumen efficiency, ideal for commercial areas such as warehouse, exhibition hall, gymnasiums, or super market. It uses aluminum alloy punched to a very thin and light fixture. Motion Sensor and Emergency Backup Optional. UL listed for damp location. DLC 5.1 Premium Listed.




Suspension Kit Included

General Specifications


	Spec	LLHB3-90W-CW
Electrical	Input Voltage	120~277V
	Wattage	90W
	Power Factor	> 0.9
Light Output	Total Lumens	12600 lm
	Efficacy	140 lm/W
	CRI	80+
	Color Temp.	5000K
	BUG	B3-U2-G1
	Distribution Type	TYPE VS Distribution
	Equivalent	400W
Physical	Housing	Aluminum Alloy
	Finish	White Powder Coat Finish
	Lens Material	Clear PC Cover
	Ambient Operating Temp	-40°C / -40°F to 55°C / 131°F
	Mount	5.3ft Adjustable Suspension Kit (Included)
Other	Net Weight	2.65 KG
	Certification	cULus E335594; DLC 5.1 Premium
	DLC Product ID	PSIOXBZT

Dimensions

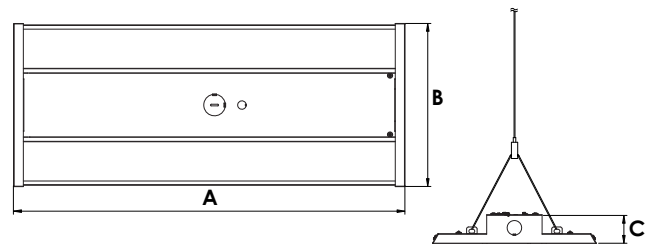

A x B x C
90W: 23-5/8" x 9-7/8" x 1-3/4"

Photometrics

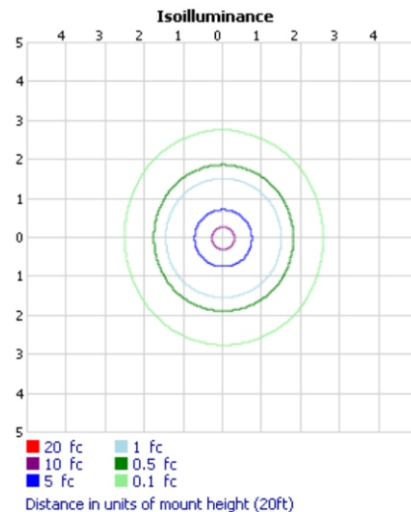

- ▶ Lifespan: **50,000 hrs**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Beam Angle: **115°**
- ▶ Dimmable: 1-10V
- ▶ **UL Listed for Damp location**
- ▶ Accessories Sold Separately:
 - Motion Sensor: **LLHB2-M**
 - Remote Control: **LLHB2-RC**
 - Emergency Backup: **LLHB2-EM**



LLHB2-M



LLHB2-RC



LLHB2-EM



Std. Pkg.

Item No.	Description	Std. Pkg.
LLHB3-90W-CW	LED LINEAR HIGHBAY, CLEAR LENS, MOTION SENSOR AND EMERGENCY BACKUP KIT OPTIONAL, 90W 120~277V 5000K CW - WHITE	1
LLHB2-M	MOTION SENSOR FOR LLHB2-FL / LLHB3 SERIES, 120~277V	1
LLHB2-RC	REMOTE CONTROL ONLY FOR LLHB2-M	1
LLHB2-EM	EMERGENCY BACKUP KIT FOR LLHB2-FL / LLHB3 SERIES, 120~277V	1

